
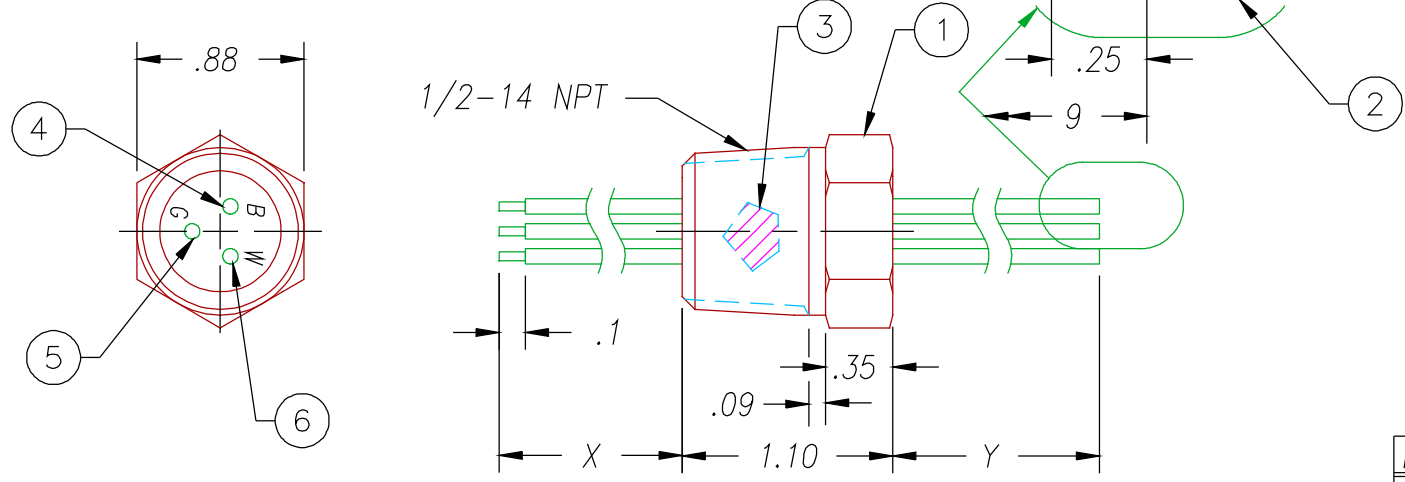


PROPRIETARY PROPERTY OF PAVE Technology Co. . UNAUTHORIZED USE OR REPRODUCTION IS PROHIBITED.

ISSUE LET.	ALTERATIONS	CHANGED BY	DATE
B	ADDED CRIMP DETAIL	AJH	FEB99
C	ADDED 0858-1	AJH	JUN00

PRESSURE DIRECTION



- NOTES:
1. LEAK TEST: 80 PSI, NO BUBBLES 1 MINUTE MINIMUM.
 2. ELECTRICAL TEST: 2500 VAC HYPOT, .5 mA MAX LEAKAGE, ALL WIRES & HOUSING.
 3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
 4. PART "0858-1" TO BE SHIPPED UNSTRIPPED & UNTERMINATED ON HEX SIDE.

PART NUMBER	X	Y	OAL
0858	9	9	20
0858-1	12 ^{MIN}	12 ^{MIN}	26

6	1	SEE TABLE	PC18 UL1569 WHT	WIRE 18PC UL1569 .016 7/#26
5	1	SEE TABLE	PC18 UL1569 GRN	WIRE 18PC UL1569 .016 7/#26
4	1	SEE TABLE	PC18 UL1569 BLK	WIRE 18PC UL1569 .016 7/#26
3	A/R		PAVE-Seal 150	EPOXY BLACK
2	3	SEE NOTE 4	AMP #323136	TERMINAL #22-16 CRIMP
1	1		8-6RB-B	HOUSING PT8-B
ITEM	QTY	PART#	DESCRIPTION	

2751 Thunderhawk Court
Dayton, OH 45414-3445
U.S.A.
tel (937) 890-1100
fax (937) 890-5165
www.pavetechnologyco.com

PAVE technology co.

DESCRIPTION PAVE-Seal® Cable Harnesses
PT8-B-150-3-PC18-X-Y

MATERIAL
NOTED

DR. BY C. HOFFMAN	APPROVED BY	DRAWN FROM R-SQUARED
CH'D BY	DATE 15 DEC 93	SCALE 1 = 1

PART NUMBER 0858*	PAGE 1	REVISION LEVEL C
	OF 2	PROJECTION ☉ □

FINISH

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/- .5
.X DECIMAL +/- .1 .XX DECIMAL +/- .02 .XXX DECIMAL +/- .005
ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS