


PART #	ITEM 4 QTY	"X" LENGTH	"Y" LENGTH	"T" TIME
0722	8@35.1'	240"	180"	18
0722-1	8@55.1'	360"	300"	28

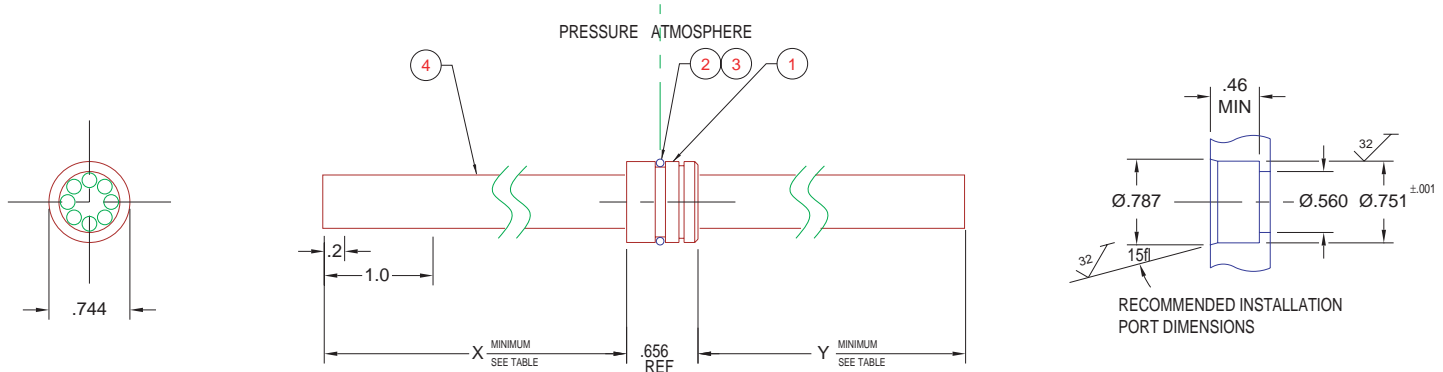

#### NOTES:

1. LEAK TEST: 80 PSI, NO BUBBLES "T" MINUTES MINIMUM (SEE TABLE).
2. HYPOT 50 VDC 20 MW .1 SEC MINIMUM, WIRE TO WIRE.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL SPECIFICATIONS AND TESTS SUPERSEDE PAVE CATALOG SPECIFICATIONS.

4	SEE TABLE	BX20 CABLE	CABLE T/C 20 ANSI BX TWSH
3	A/R	PARKER O-LUBE	LUBRICANT O-RING BARIUM
2	1	-016 VITON	O-RING -016 VITON 75
1	1	0434	HOUSING SP12-E
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES  
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/- .5  
 .X DECIMAL +/- .1 .XX DECIMAL +/- .02 .XXX DECIMAL +/- .005  
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS



DESCRIPTION PAVE Seal/E Cable Harnesses SEE TABLE FOR X & Y  
 SP12-E-150-8P-BX20-X-Y

PART NUMBER 0722 PROJECTION