



DO NOT SCALE PRINT

ISSUE LET.	ALTERATIONS	CHANGE NO.	DATE

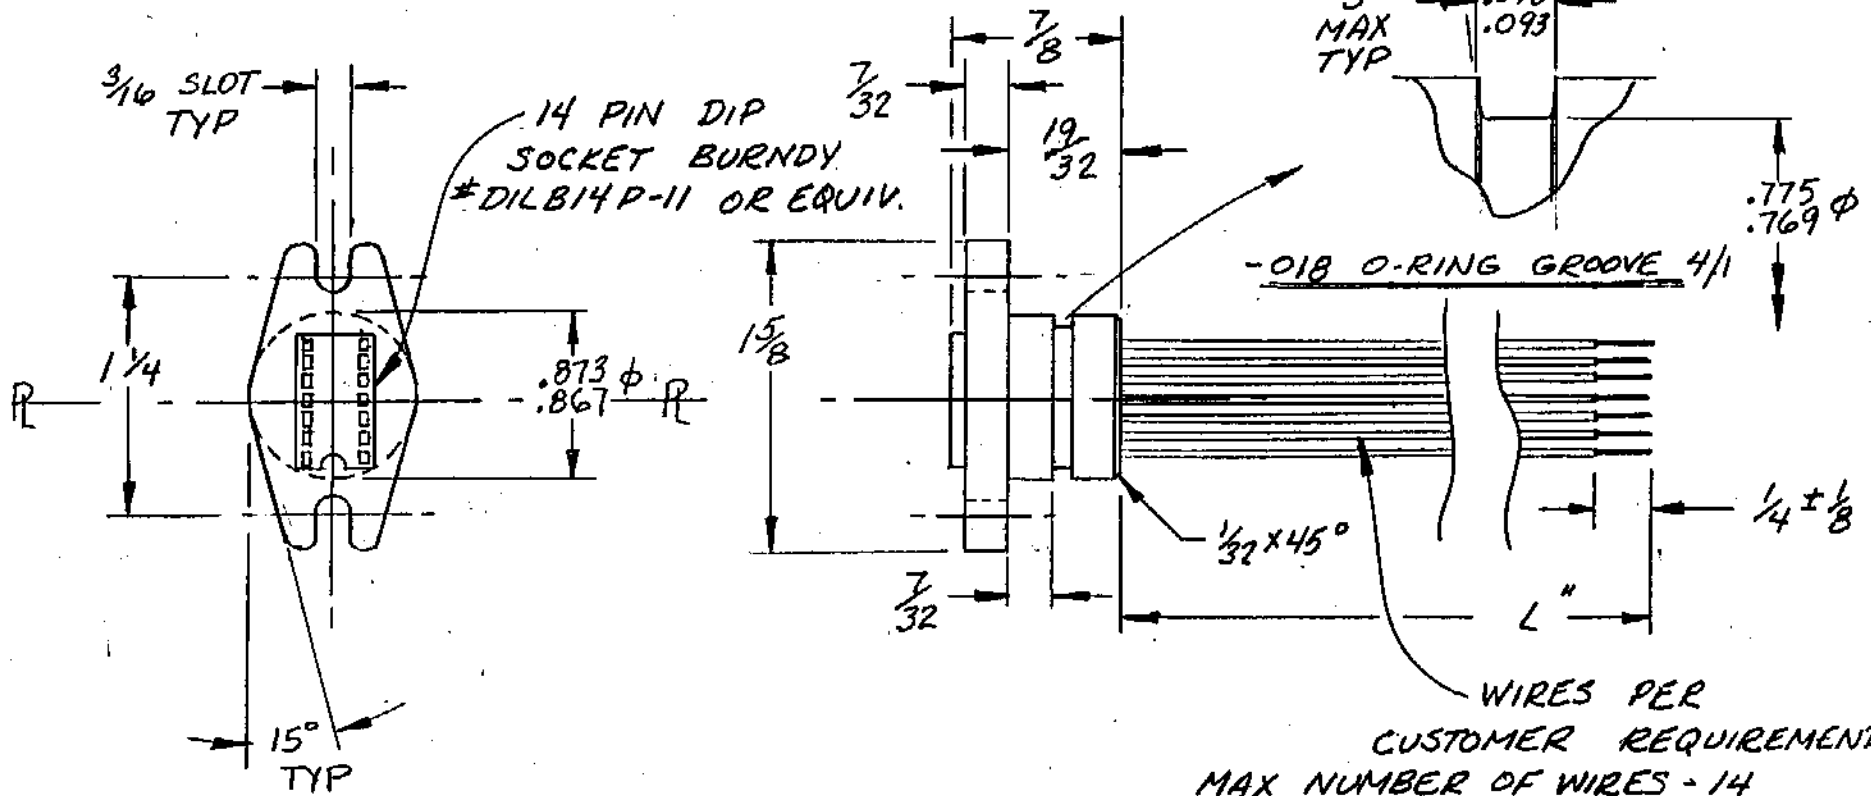

WIRES PER  
CUSTOMER REQUIREMENTS  
MAX NUMBER OF WIRES - 14  
MAX WIRE SIZE - 18 AWG  
(300 V PVC)

- NOTES:
1. RECOMMENDED HOLE SIZE  $.877 \phi$
  2. MAX DRAFT  $1^\circ$
  3. PRESSURE TEST 100 PSI & 1000 VAC HYPOT TO 25 AQL
  4. OPERATING ENVIRONMENT  $10^{-5}$  TORR

		PAVE Technology Co.	
		Pressure And Vacuum Electrical Feedthru Harnesses	
TITLE DIP SOCKET PAVE-MATE			
MATERIAL PAVE CMPND#3 & NOTED			
DR. BY WLW	APPROVED BY [Signature]	DRAWN FROM CUST REQ	
CH'D BY	DATE 3/20/81	SCALE FULL & NOTED	
PART NUMBER 0000			

SEAL PER PAVE SPEC #1
FINISH GREASE "O" GROOVE H.V.

ALL DIM. AND TOLERANCES APPLY TO FINISHED PART UNLESS OTHERWISE SPECIFIED.  
ALLOWABLE TOLERANCES UNLESS OTHERWISE SPECIFIED -  
FRACTIONS  $\pm 1/64$  DECIMALS  $\pm .005$  ANGLES  $\pm 1''$