


ATMOSPHERE

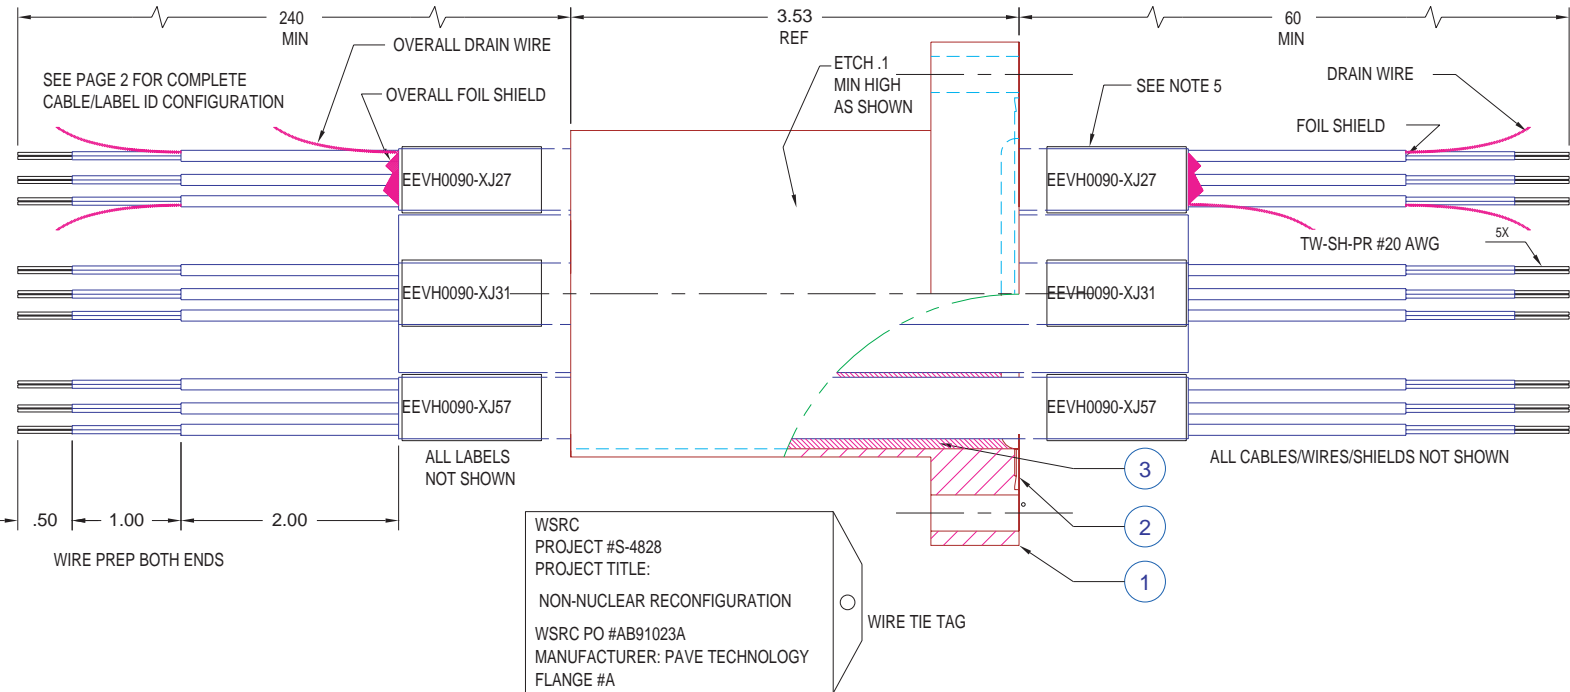

SCALE 1 = 2

- NOTES:
- MEGGER TO 500 MEGOHMS MIN AT 630 VOLTS DC .01 SEC
  - HELIUM LEAK TEST - LESS THAT  $1 \times 10^{-7}$  CC/SEC AT 1 ATM  
DIFF. IN DIRECTION SHOWN WITH COPPER GASKET
  - RESISTANCE/CONTINUITY TEST :  
TW-SH-PR-#20- .34 OHMS, SHLD-.24 OHMS, OVERALL SHLD-.18 OHMS
  - THERMAL CYCLE FROM -60 $^{\circ}$ C TO 90 $^{\circ}$ C FOR 2 CYCLES - 2 HOUR HOLD
  - ID CABLE WITH PAPER LABEL AS SHOWN AND WRAP IN KAPTON TAPE  
(BOTH ENDS OF WIRE) - USE 1/8" MIN LETTERING

3	1	PAVE	PAVESEAL 150	EPOXY
2	2	MDC	191011	COPPER GASKET
1	1	MDC	401005	CF4.62 W/S NIP
ITEM#	QTY	SUPR	PART NUMBER	DESCRIPTION

2751 Thunderhawk Court  
 Dayton, Ohio 45414-3445  
 U.S.A.  
 (937)890-1100  
 fax (937)890-5165  
 www.paveelectronics.com

DESCRIPTION  
**CF462-A WIRE HARNESS**  
 PART NUMBER  
**1432**  
 PROJECTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES  
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/- .5  
 .X DECIMAL +/- .1 .XX DECIMAL +/- .02 .XXX DECIMAL +/- .005  
 ANGLES +/- 1 DEG SURFACE FINISH 128 micronch RMS