
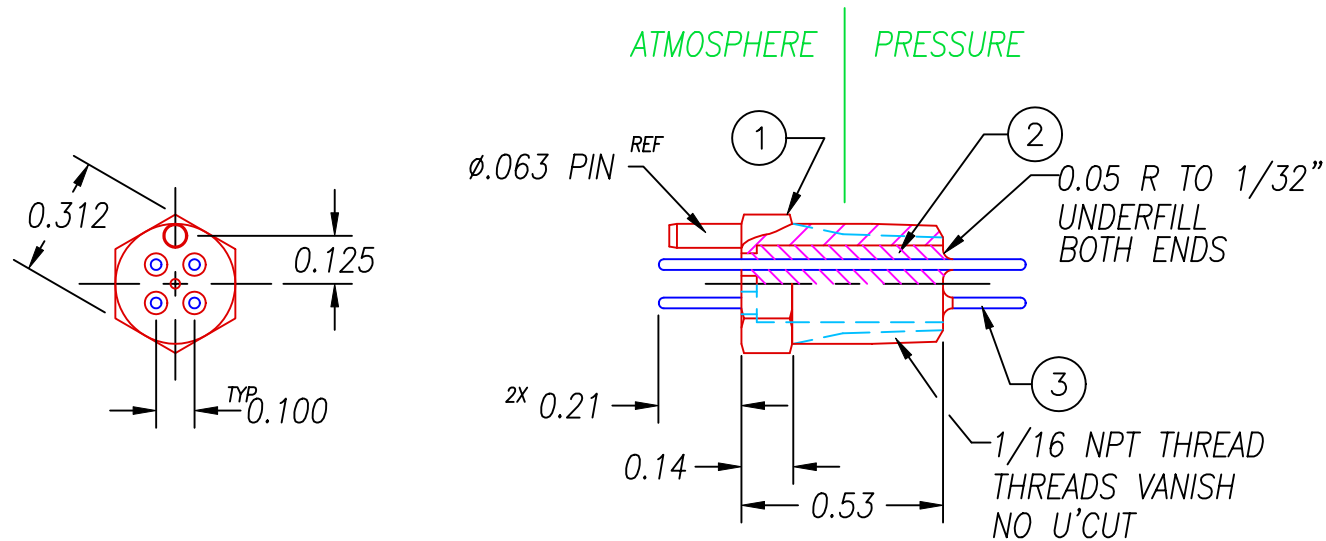


ACTUAL SIZE OF ASSEMBLY

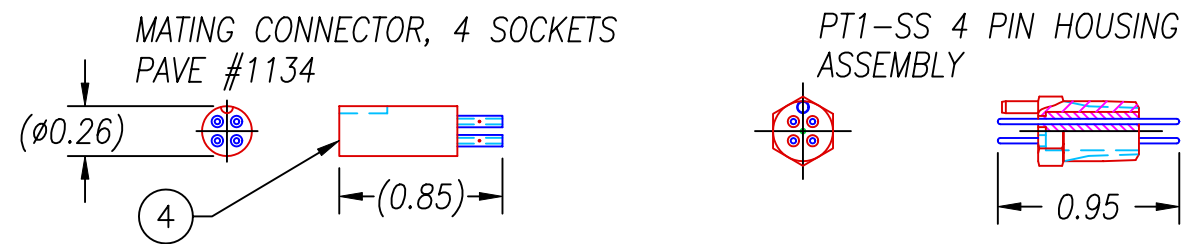

PART#	TEST PRESSURE
2581	10,000 PSI
2581L	80 PSI

NOTES:

1. LEAK TEST: SEE TABLE, NO BUBBLES 1 MINUTE MINIMUM.
2. HYPOT 630 VDC 500 MΩ 0.01 SEC MINIMUM, WIRE TO WIRE & HOUSING USING MATING CONNECTOR (#1134).
3. CONTINUITY TEST 1 OHM MAXIMUM SOCKET TO SOCKET.
4. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
5. PERCENTAGE OF PARTS TESTED WILL BE 100% (MAY BE A LESSER PERCENTAGE FOR LARGE PRODUCTION QUANTITIES, UNLESS OTHERWISE NOTED OR REQUIRED).

4	2	1134	SOCKET PLUG 4x22D ASY
3	4	1133	PINS COPPER .028 DIA GOLD PLATED
2	A/R	PAVESEAL 200	EPOXY BLACK
1	1	1126-C276	HOUSING PT1-C276
ITEM	QTY	PART#	DESCRIPTION

PAVE technology co.
 2751 Thunderhawk Court
 Dayton, Ohio 45414-3445
 U.S.A.
 (937)890-1100
 fax (937)890-5165
 www.pavetechnologyco.com

DESCRIPTION
PT1-C276-200-4-.028Cu-QD

PART NUMBER
2581

REVISION LEVEL
A

PROJECTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-0.5
 .X DECIMAL +/- 0.1 .XX DECIMAL +/- 0.02 .XXX DECIMAL +/-0.005
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS