


LEAK TEST PORT

ATMOSPHERE PRESSURE

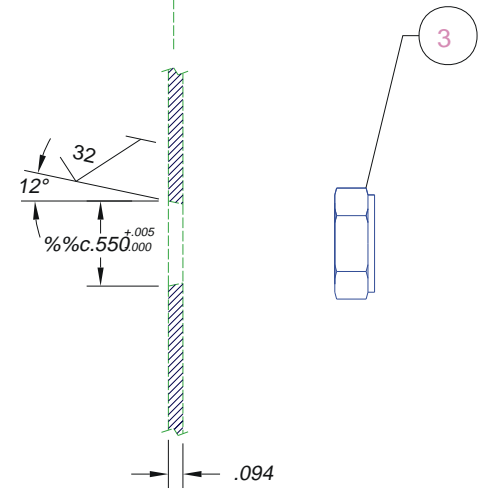

NOTES:

1. HIPOT TEST: 630 VDC, 500 MEGOHMS WIRE TO WIRE, & WIRE TO HOUSING, 10 ms MIN.
2. LEAK TEST: 80 PSI, 30 SECONDS MIN, NO VISIBLE BUBBLES WIRE OR HOUSING.

6	A/R	PAVE-Seal 80	EPOXY, BLACK
5	A/R	SUPER-0-LUBE	LUBRICANT, O-RING
4	1	3-905 VITON 75A	O-RING
3	1	0555	NUT, SS, .500-20
2	2@13	TE22	WIRE, TEFLON, 22AWG
1	1	5P50N-SS	HOUSING, SO8, SS
ITEM	QTY	PART#	DESCRIPTION

TITLE OR PAVE ORDER CODE

SO8-SS-80-2-TE22-6-6

PART NUMBER

1660

PROJECTION

