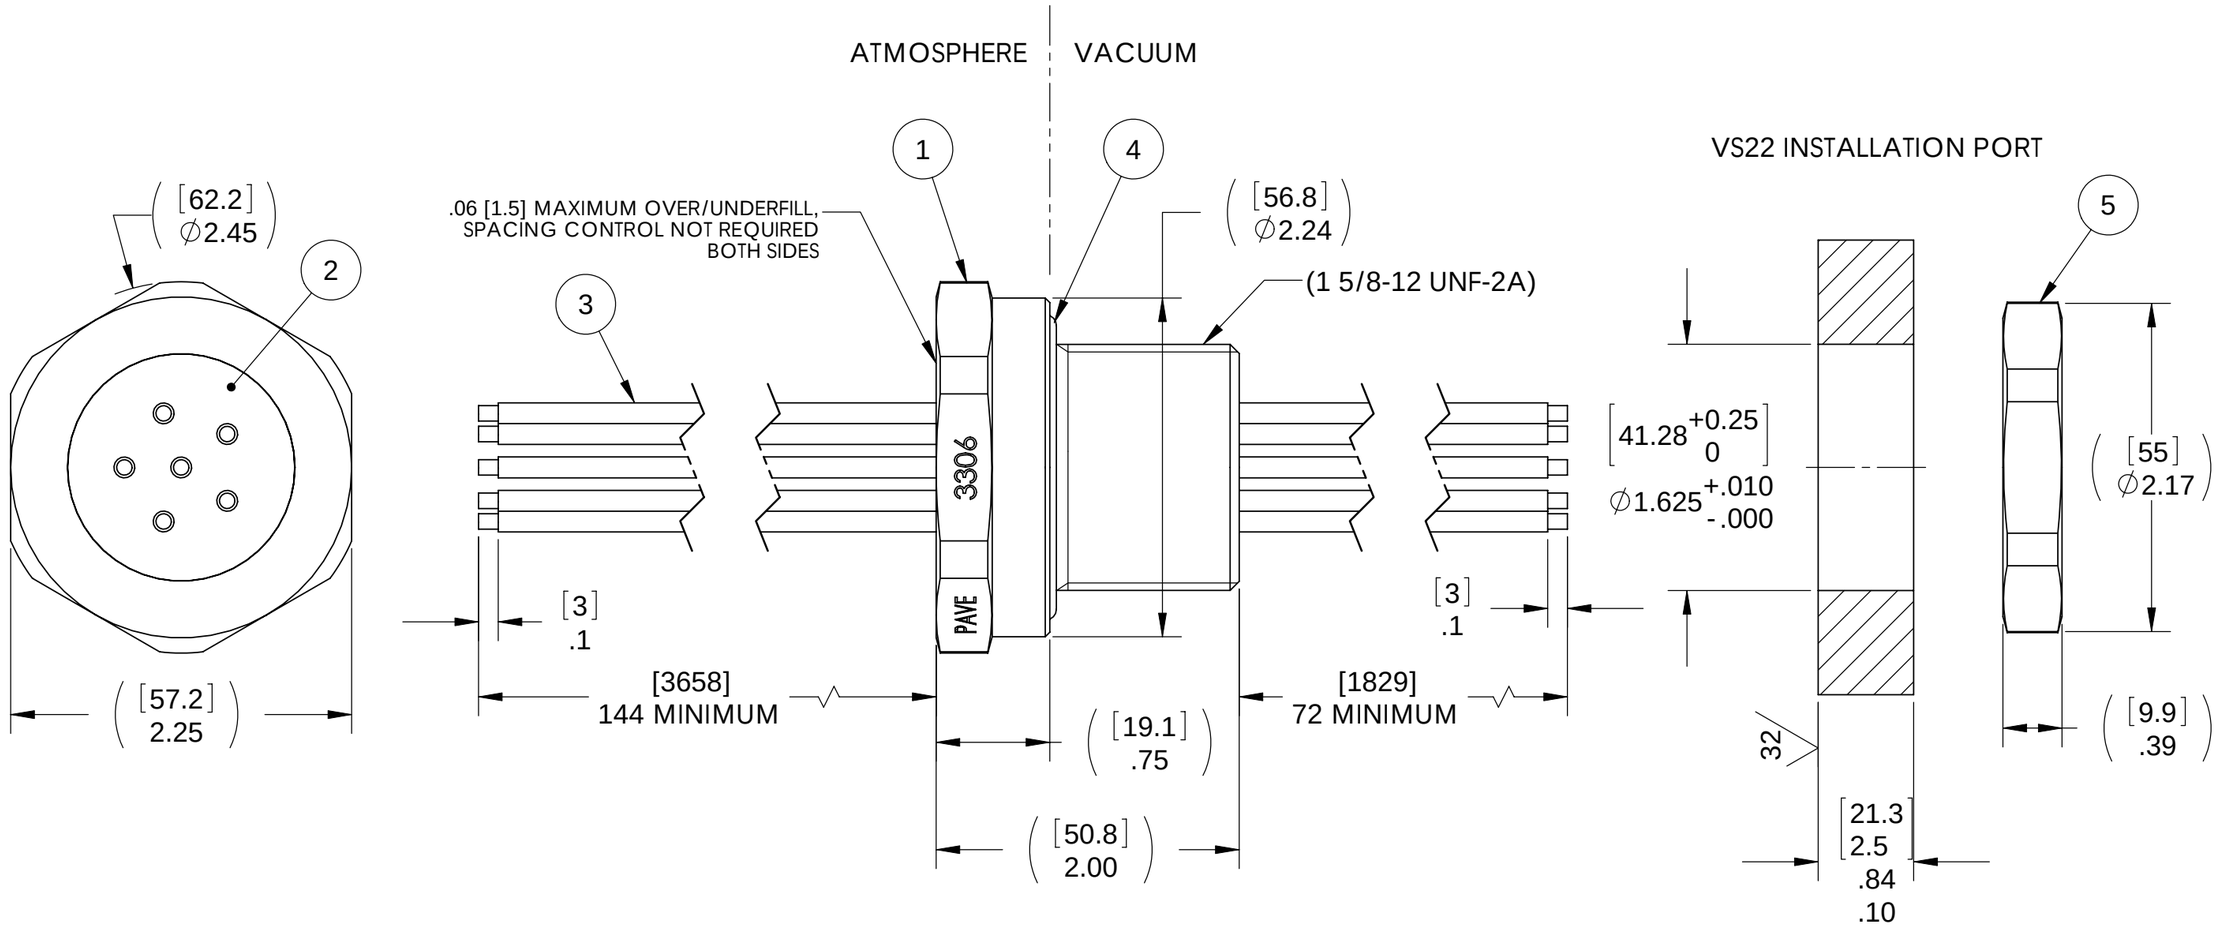

NOTES:

1. HE LEAK TEST VACUUM 10X10^-7 CC/SEC OR LESS.
2. HYPOT 630 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE AND HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. WIRE POSITIONING IS APPROXIMATE & VARIABLE.
6. VOIDS LARGER THAN ∅.035 [.89] ARE NOT ACCEPTABLE.
7. REF-OPERATING TEMPERATURE -40˚C TO 125˚C.
8. DIMENSIONS ARE INCHES [millimeters].

ITEM	QTY	PART NUMBER	DESCRIPTION
5	1	0199	NUT VS22-SS
4	1	-224 VITON LT	O-RING -224 VITON 75 LT
3	6	EE10 RED	WIRE 10EE MIL-W-16878/5 .017 37/#26
2	1	PAVE-Seal 150	EPOXY BLACK
1	1	0189/304SS	HOUSING VS22-SS

PAVE technology co.
2751 Thunderhawk Court
Dayton, OH 45414-3445
U.S.A.
tel (937) 890-1100
fax (937) 8905165
www.pavetechnologyco.com

DESCRIPTION
VS22-SS-150-6-TEE10-144-72

PART NUMBER
3306

MATERIAL NOTED

REVISION LEVEL -

PROJECTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5
X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005
ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS