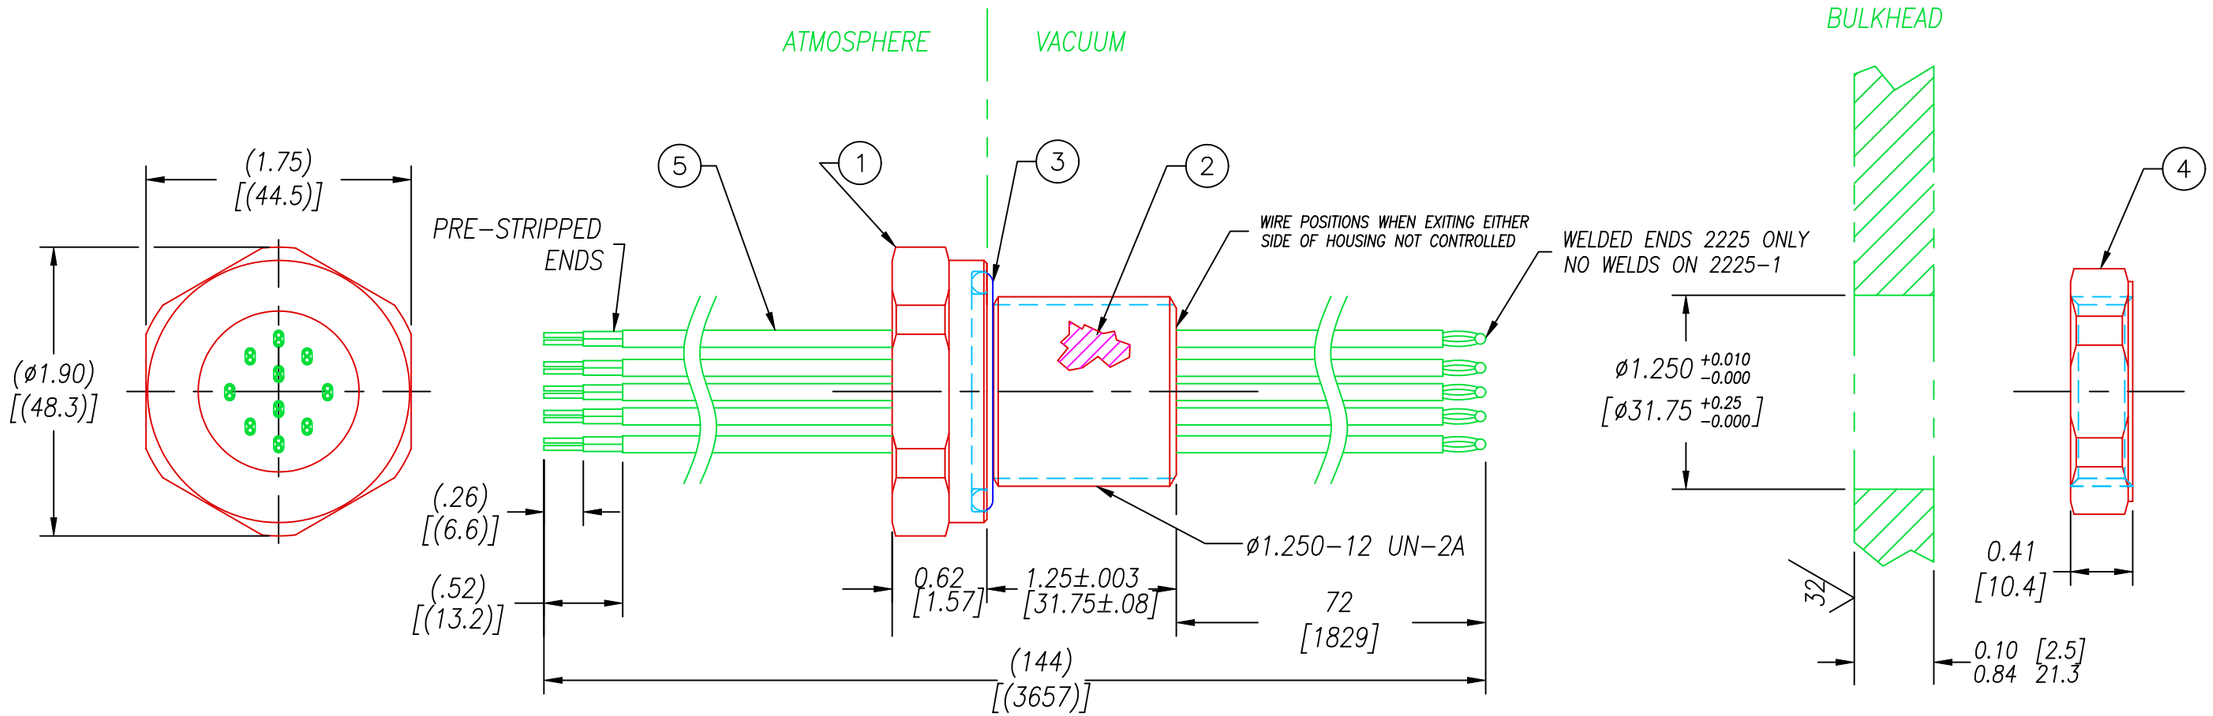

PART#	PART#	DESCRIPTION
2225	5TC-TT-T-20-144	CABLE T/C TYPE T#20SLE TEF PREMIUM 144" 5PAIR
2225-1	TT20	CABLE T/C TYPE T #20 TEFLON FEP

NOTES:

1. HE LEAK TEST @1 ATM. 10x10^-8 CC/S OR LESS.
2. HYPOT 630 VDC 500 MΩ 0.01 SEC MINIMUM, PAIR TO PAIR & HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. VOIDS SMALLER THAN ø.035[ø.89] ARE ACCEPTABLE.
6. DIMENSIONS ARE INCHES[MILLIMETERS].

ITEM#	QTY	PART#	DESCRIPTION
5	10 PAIR	SEE TABLE	SEE TABLE
4	1	1014	NUT VS18 SS
3	1	-219 VITON	O-RING -219 VITON 75A
2	A/R	PAVE-Seal 150	EPOXY BLACK
1	1	0660	HOUSING VS18 SS

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-0.5
.X DECIMAL +/- 0.1 .XX DECIMAL +/- 0.02 .XXX DECIMAL +/-0.005
ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS

PAVE technology co.
2751 Thunderhawk Court
Dayton, Ohio 45414-3445
U.S.A.
(937)890-1100
fax (937)890-5165
www.pavetechnologyco.com

DESCRIPTION PAVE-Seal® Cable Harnesses
VS18-SS-150-10P-TT20-72-72

PART NUMBER 2225

REVISON LEVEL A

PROJECTION