

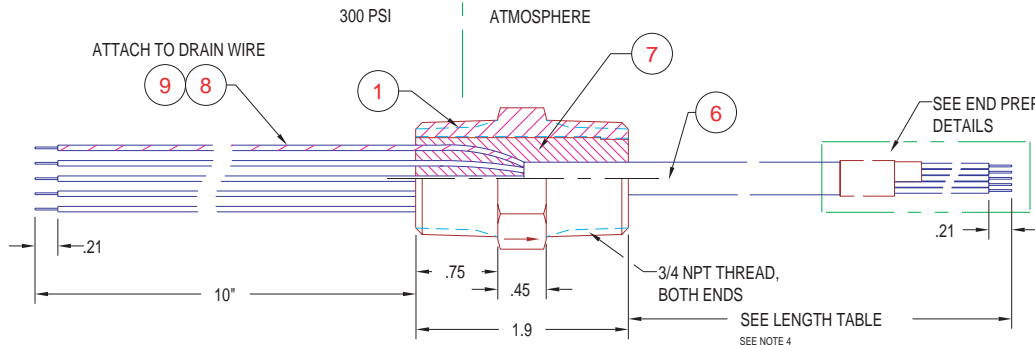


APPROX. WIRE LOCATIONS
WITHIN E".70 BUNDLE




END PREP DETAILS


STEP 1

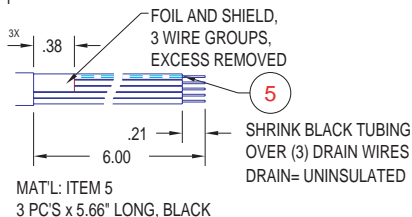

STEP 2

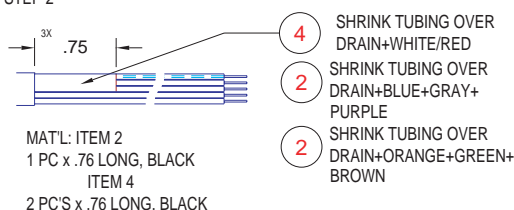

STEP 3

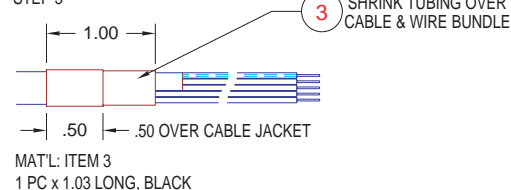

NOTES:

1. LEAK TEST: 300 PSI N2 FOR 6 MINUTES MIN NO VISIBLE BUBBLES.
2. HYPOT 630 VDC 500 MEGOHMS .01 SEC MINIMUM, WIRE TO WIRE & HOUSING.
3. NO SHORTS WIRE TO WIRE, SHIELDS, OR HOUSING.
4. CHECK JOB ORDER INSTRUCTIONS FOR DASH NUMBER & CABLE LENGTH.
5. INCLUDE BAR CODE TICKET FOR EACH ITEM IN CONTAINER. ON PARTIAL SHIPMENT SEND CARDS WITH INITIAL SHIPMENT & HANDWRITE QUANTITY SHIPPED ON TICKET.

SMITH METER VERSION #315307-0-	-01	-02	-03	-04
PAVE #1185	-1	-2	-3	-4
CABLE LENGTH	10.5'	20.5'	50.5'	100.5'

9	A/R	SN96	SOLDER
8	1FT	EE26 UL1180W/BU	WIRE 26EE UL1180 WHT+BLU STRIPE
7	A/R	PAVESEAL 200	EPOXY
6	NOTE 4	645364-4-01	CABLE 12W EE26 SHLD DRAIN CUST SUPPLIED
5	1.42FT	FIT-105-3/64	TUBING SHRINK 3/64" IRR. PVC A
4	.13FT	FIT-221-1/8	TUBING SHRINK 1/8 IRR POLY AL
3	.09FT	FIT-221-3/8	TUBING SHRINK 3/8" IRR POLY AL
2	.07FT	FIT-221-3/32	TUBING SHRINK 3/32" IRR POLY N
1	1	0073	HOUSING PTN12-SS
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/- .5
 .X DECIMAL +/- .1 .XX DECIMAL +/- .02 .XXX DECIMAL +/- .005
 ANGLES +/- 1 DEG SURFACE FINISH 128 microminch RMS

2751 Thunderhawk Court
 Dayton, Ohio 45416-3445
 U.S.A.
 (937)890-1100
 fax (937)890-5165
 www.pave-technology.com

DESCRIPTION
PTN12-SS-200-1-12W CABLE-

PART NUMBER
1185-

PROJECTION

10FT
 20FT
 50FT
 100FT