


METRIC DRAWING

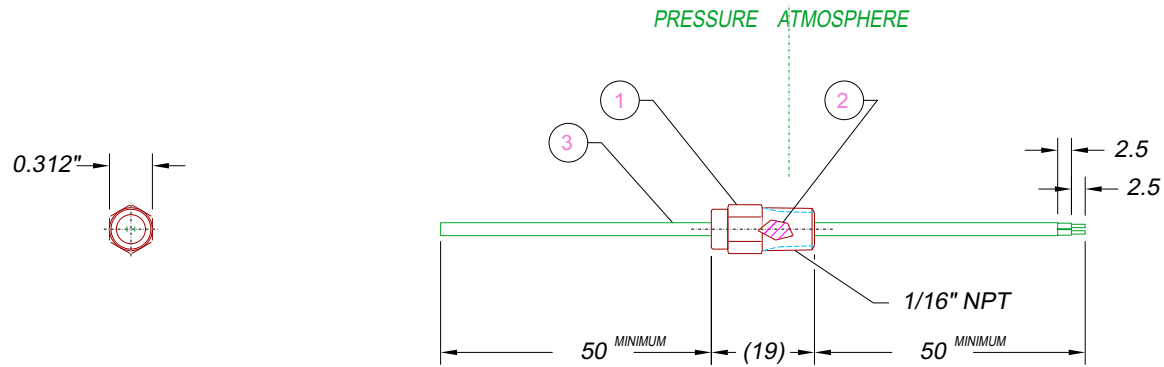

NOTES:

1. LEAK TEST: 200 BARS (2900 PSI), NO BUBBLES 12 SECONDS MINIMUM.
2. HYPOT 630 VDC 500 MW 0.01 SEC MINIMUM, WIRE TO WIRE & HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.

3	119mm	JT24	CABLE T/C TYPE J 24AWG TEFLON
2	A/R	PAVE-Seal 150	EPOXY BLACK
1	1	SS-1-P	HOUSING PT1-SS
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN MM  
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-13  
 .X DECIMAL +/- 2.5 .XX DECIMAL +/- .50 .XXX DECIMAL +/-100  
 ANGLES +/- 1 DEG SURFACE FINISH 3.2 micrometers RMS



DESCRIPTION PAVE-Seal@ Cable Harnesses  
**PT1-SS-150-1P-JT24-50-50mm**

PART NUMBER  
**2409**

