
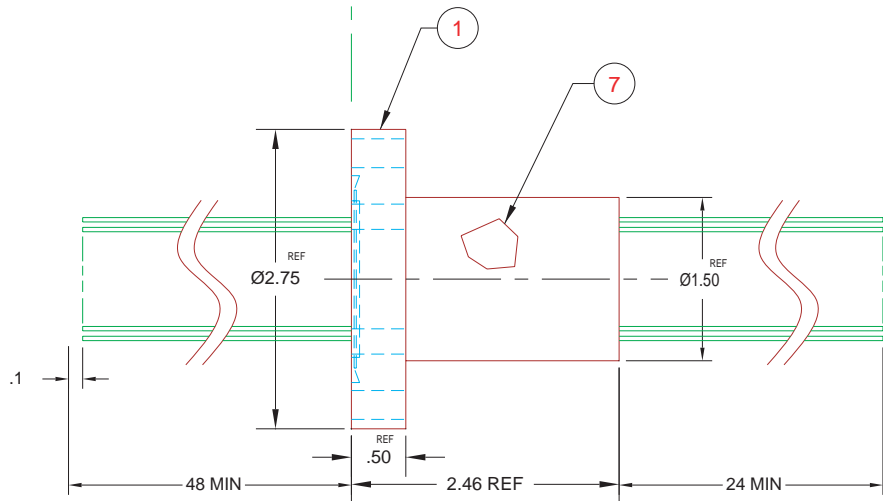


VACUUM ATMOSPHERE

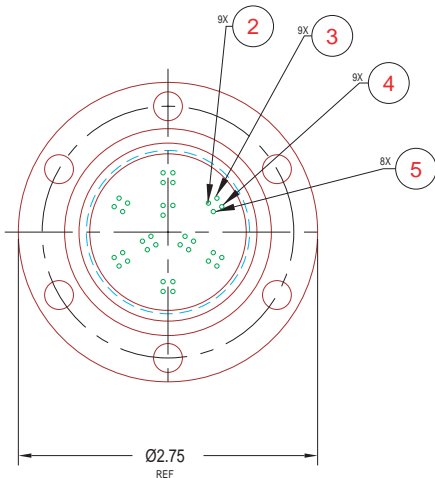

NOTES:

1. HE LEAK TEST @ 1 ATM. $<10^{-7}$ CC/S AIR EQUIVALENT. (AIR EQUIVALENT LEAK RATE/2.73 = ACTUAL He LEAK RATE)
2. HYPOT 630 VDC 500 MEGOHMS .01 SEC MINIMUM, WIRE TO WIRE & HOUSING.
3. ALL TESTS ARE DONE AT ROOM TEMPERATURE.
4. THESE SPECIFICATIONS SUPERSEDE PAVE CATALOG.
5. ASSEMBLY TO SHIP W/COPPER GASKET (ITEM 6).

7	A/R	PAVE-Seal 150	EPOXY, BLACK
6	1	NOR-CAL #G-275	GASKET, COPPER (NOT SHOWN)
5	8@6.3'	E24 GRAY	WIRE 24E MIL-W-16878/4 7#32
4	9@6.3'	E24 BROWN	WIRE 24E MIL-W-16878/4 7#32
3	9@6.3'	E24 GREEN	WIRE 24E MIL-W-16878/4 7#32
2	9@6.3'	E24 YELLOW	WIRE 24E MIL-W-16878/4 7#32
1	1	1473	HOUSING, CF275, SS
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/- .5
 .X DECIMAL +/- .1 .XX DECIMAL +/- .02 .XXX DECIMAL +/- .005
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS



DESCRIPTION
CF275-SS-150-35-TE24-48-24

PART NUMBER
1644

PROJECTION

