

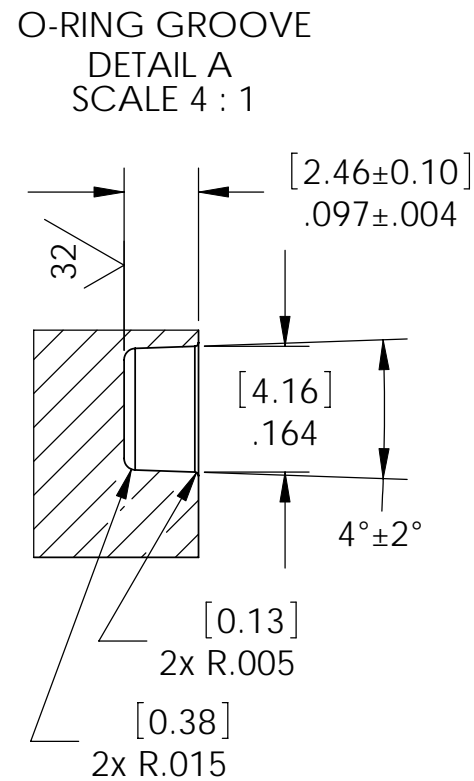
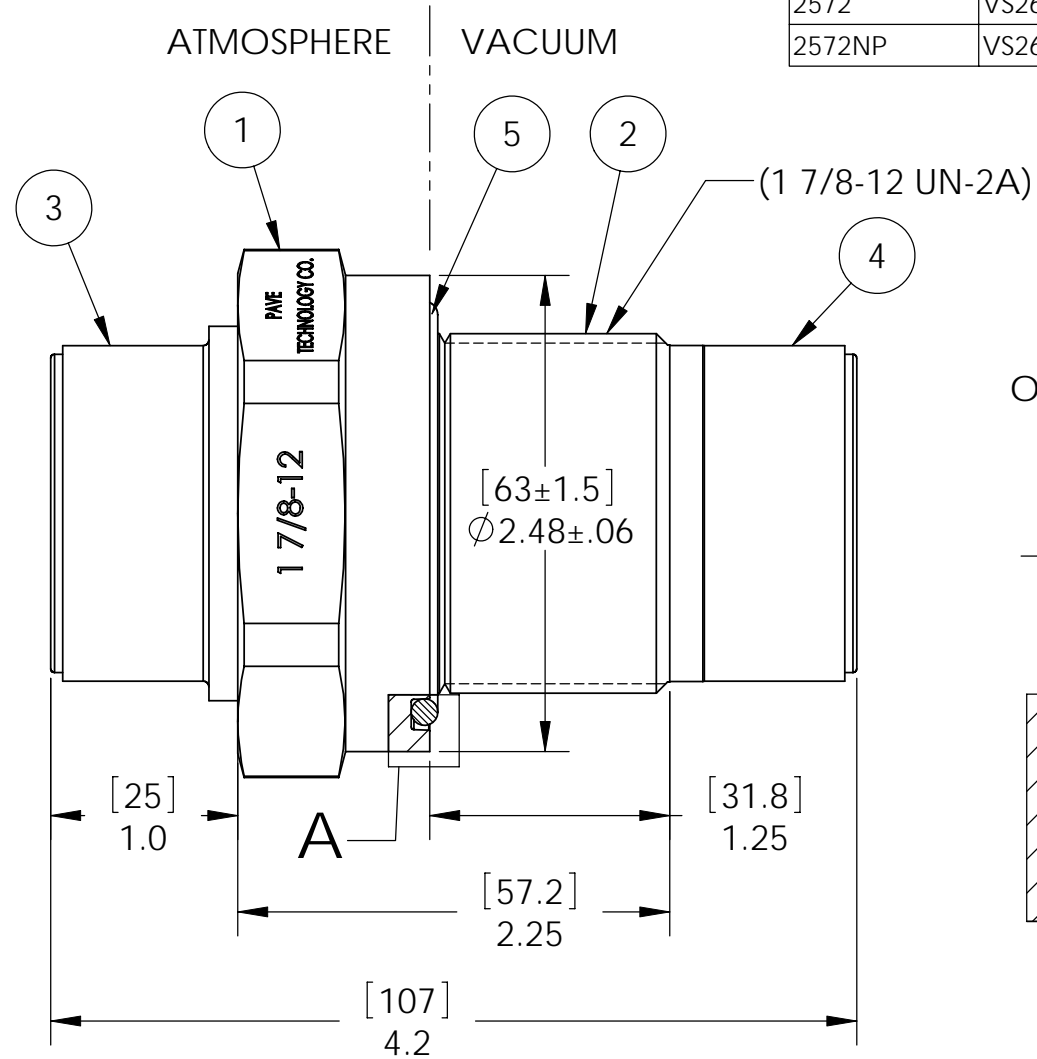


PAVE PART#	DESCRIPTION
2572	VS26-E-150-26-16-3102PS
2572NP	VS26-E-150-26-16-3102PS (NP)

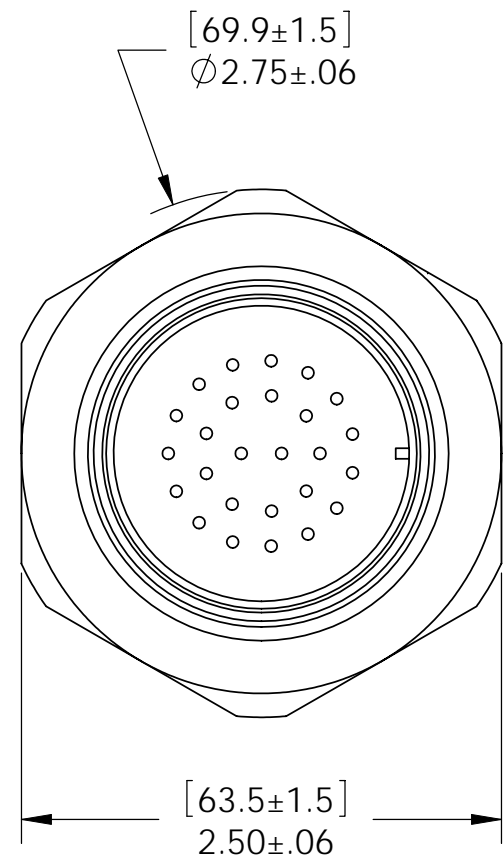

VS26 INSTALLATION PORT

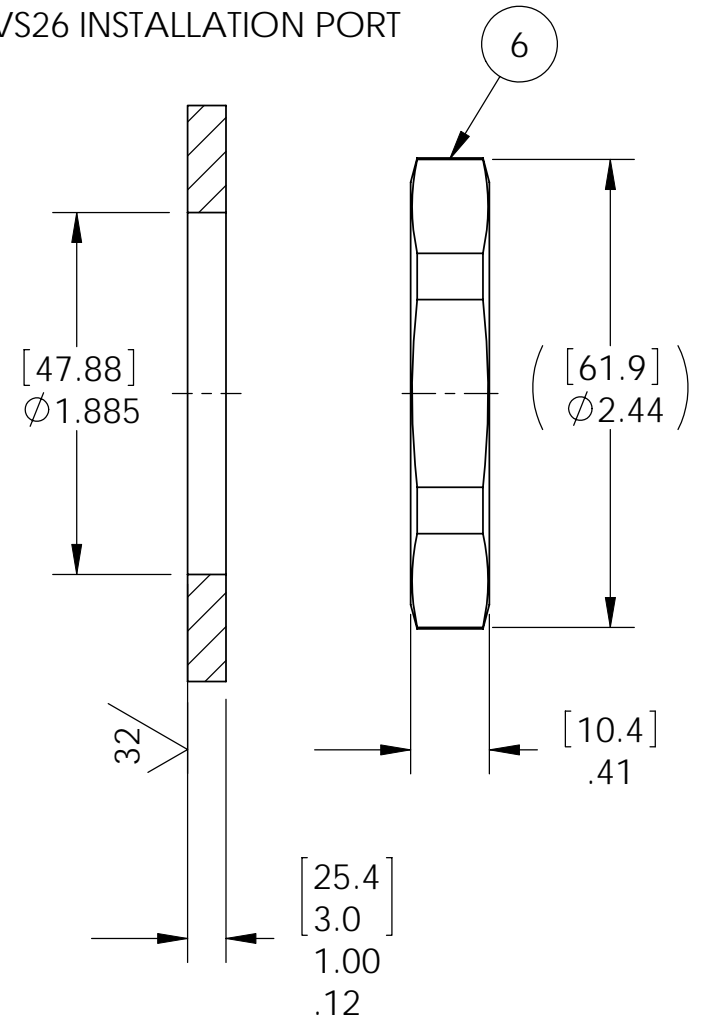

NOTES:

1. HE LEAK TEST VACUUM 10×10^{-7} CC/SEC OR LESS.
2. HYPOT 630 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE AND INSERT.
3. CONTINUITY TEST $< 0.5 \Omega$ MATING CONNECTOR TO MATING CONNECTOR.
4. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
5. ALL PARTS MUST PASS ALL TESTS.
6. NO VOIDS ARE ACCEPTABLE ON O-RING SEALING SURFACES, VOIDS SMALLER THAN $\phi 0.035$ [.89] ARE ACCEPTABLE ON ALL OTHER SURFACES.
7. FOR PART# 2572 ITEMS 7 & 8 ARE INCLUDED BUT NOT SHOWN & WILL BE SHIPPED WITH PART.
8. FOR PART# 2572NP (NO MATING PLUGS) ITEMS 7 & 8 ARE NOT INCLUDED.
9. DIMENSIONS ARE INCHES [millimeters].

8	1	SC3106A28-12S	PLUG 26#16 ELECTROLESS NICKEL PLATED SOC
7	1	SC3106A28-12P	PLUG 26#16 ELECTROLESS NICKEL PLATED PIN
6	1	0185	NUT VS26-SS
5	1	-226 VITON	O-RING -226 VITON 75
4	1	SC3102A28-12S	RCPT 26#16 ELECTROLESS NICKEL PLATED BLUE INSERT SOC
3	1	SC3102A28-12P	RCPT 26#16 ELECTROLESS NICKEL PLATED BLUE INSERTS PIN
2	1	0222	THREAD INSERT VS26-SS
1	A/R	PAVE-Seal 150	EPOXY BLACK
ITEM	QTY	PART NUMBER	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ± 0.5
 X.X DECIMAL ± 0.1 X.XX DECIMAL ± 0.02 X.XXX DECIMAL ± 0.005
 ANGLES ± 1 DEGREE SURFACE FINISH 128 microinch RMS

PAVE technology co.
 2751 Thunderhawk Court
 Dayton, OH 45414-3445
 U.S.A.
 tel (937) 890-1100
 fax (937) 8905165
 www.pavetechnologyco.com

DESCRIPTION
SEE TABLE

PART NUMBER
2572*

MATERIAL NOTED

REVISION LEVEL
B

PROJECTION