


NOTES:

1. HE LEAK TEST @ 1 ATM. 10^{-6} CC/S.
2. HYPOT 630 VDC 500 MEGAOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE AND HOUSING.
3. CONTINUITY TEST 0.5 Ohms MATING CONNECTOR TO MATING CONNECTOR.
4. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
5. PERCENTAGE OF PARTS TESTED WILL BE 100% (MAY BE A LESSER PERCENTAGE FOR LARGE PRODUCTION QUANTITIES, UNLESS OTHERWISE NOTED OR REQUIRED).
6. ITEM NO. 8 & 9 INCLUDED BUT NOT SHOWN.

9	1	SC3106A28-12S	PLUG 26#16
8	1	SC3106A28-12P	PLUG 26#16
7	A/R	SUPER O-LUBE	LUBRICANT SILICONE-BASED
6	1	0185	NUT VS26-SS
5	1	-226 VITON	O-RING -226 VITON 75
4	1	SC3102A28-12S	RCPT 26#16
3	1	SC3102A28-12P	RCPT 26#16
2	1	0222	VS26 THREAD INSERT
1	A/R	PAVE-Seal 150	EPOXY BLACK
ITEM NO.	QTY.	PART NO.	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ± 0.5
 X.X DECIMAL ± 0.1 X.XX DECIMAL ± 0.02 X.XXX DECIMAL ± 0.005
 ANGLES ± 1 DEGREE SURFACE FINISH 128 microinch RMS

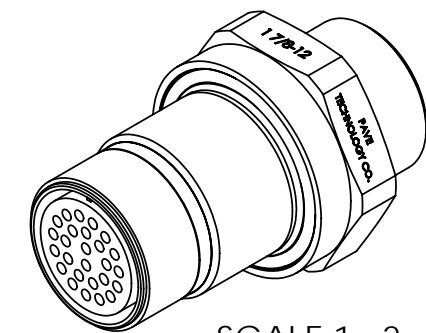

SCALE 1 : 2

PAVE technology co.
 2751 Thunderhawk Court
 Dayton, OH 45414-3445
 U.S.A.
 tel (937) 890-1100
 fax (937) 8905165
 www.pavetechnologyco.com

DESCRIPTION
 VS26-E-150-26-16-3102PS

PART NUMBER
 2572

REVISION LEVEL
 A

PROJECTION