






KEYWAY DWG	PAVE #	RECEPTACLE PART #s
	1661-C	D38999/20FC35SC D38999/20FC35PC
	1661-B	D38999/20FC35SB D38999/20FC35PB
	1661-A	D38999/20FC35SA D38999/20FC35PA
	1661-N	D38999/20FC35SN D38999/20FC35PN

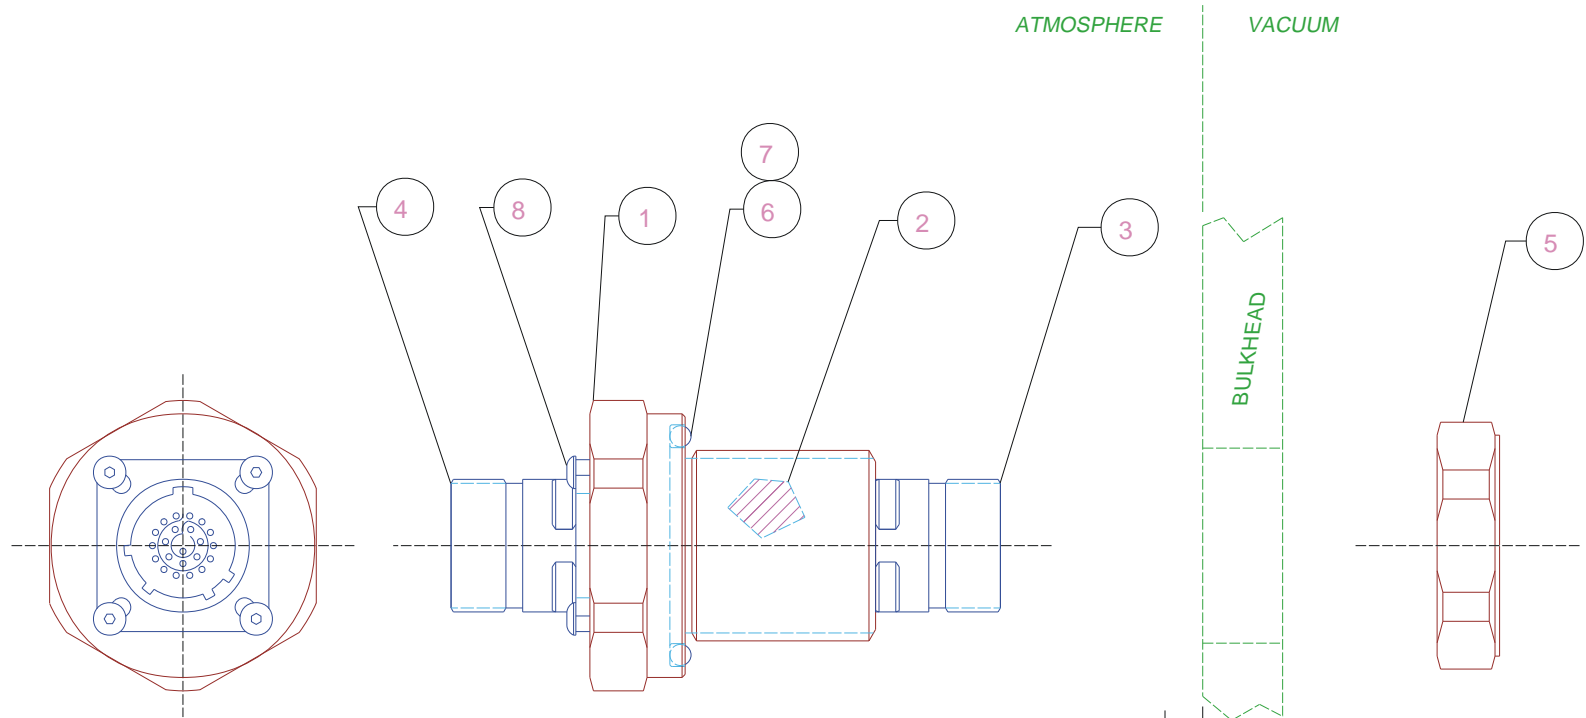

- NOTES:
- HE LEAK TEST @1 ATM. <math>10^{-7}</math> CC/S AIR EQUIVALENT.  
(AIR EQUIVALENT LEAK RATE/2.73 = ACTUAL He LEAK RATE)
  - HYPOT 630 VDC 500 MEGOHMS .01SEC W/MATING PLUGS
  - CONTINUITY TEST W/MATING PLUGS -1.0 OHM MAX
  - 1661-N KEYWAY ARRANGEMENT SHOWN - SEE TABLE FOR OTHERS.

TITLE OR PAVE ORDER CODE	
VS18-SS-150-22-22-99920SP* (NP)	
PART NUMBER	PROJECTION
1661-*	