


INSTALLATION PORT DIMENSIONS

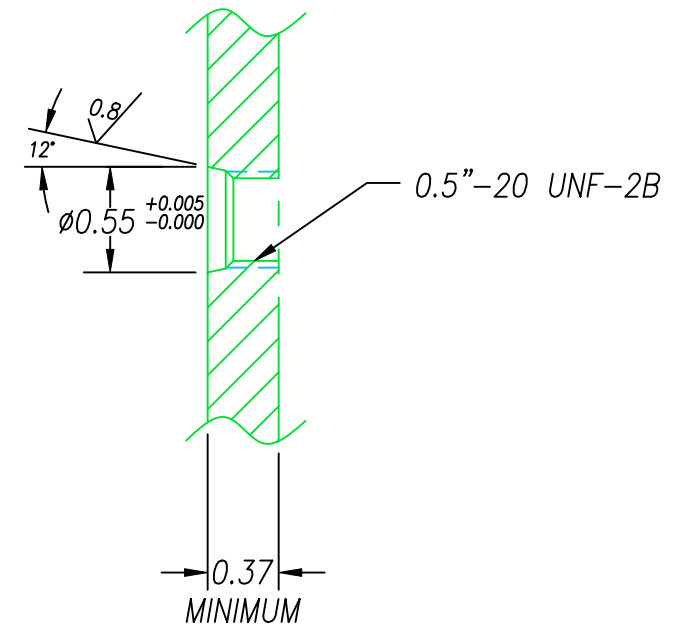

NOTES:

1. LEAK TEST: 80 PSI, NO BUBBLES 30 SECONDS MINIMUM.
2. HYPOT 630 VDC 500 MΩ 0.01 SEC MINIMUM, ROD TO HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. PERCENTAGE OF PARTS TESTED WILL BE 100% (MAY BE A LESSER PERCENTAGE FOR LARGE PRODUCTION QUANTITIES, UNLESS OTHERWISE NOTED OR REQUIRED).

5	A/R	SUPER-0-LUBE	LUBRICANT O-RING SILICONE
4	1	-905 BUNA	O-RING -905 BUNA 75
3	A/R	PAVE-Seal 80	EPOXY, BLACK
2	2.67"	TRBB-632-36	ROD BRASS THREADED 6-32 36"L
1	1	5P50N-SS	HOUSING, S08, SS
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-0.5
 .X DECIMAL +/- 0.1 .XX DECIMAL +/- 0.02 .XXX DECIMAL +/-0.005
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS



DESCRIPTION PAVE-Mate® I Connectors
 S08-SS-80-1-BR-1-1

PART NUMBER
 2584

REVISION LEVEL B
 PROJECTION