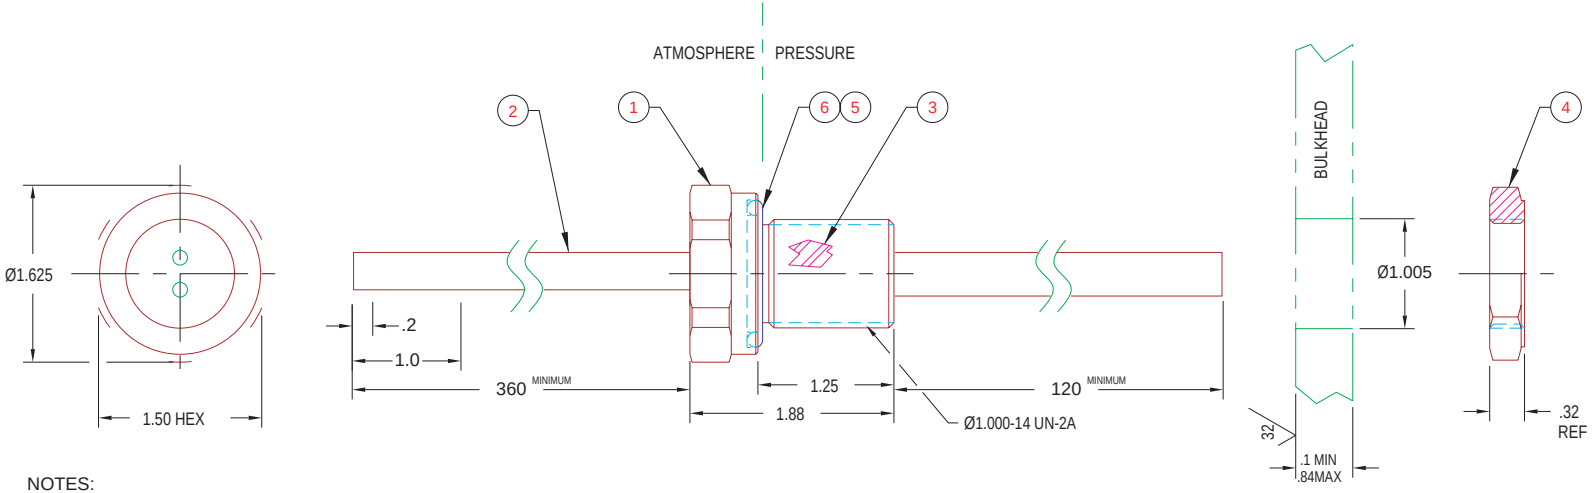

NOTES:

1. LEAK TEST: 80 PSI, NO BUBBLES 10 MINUTES MINIMUM.
2. HYPOT 630 VDC 500 MW .01 SEC MINIMUM, WIRE TO WIRE & HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL SPECIFICATIONS AND TESTS SUPERSEDE PAVE CATALOG SPECIFICATIONS.

ITEM	QTY	PART#	DESCRIPTION
6	1	-215 VITON	O-RING -215 VITON 75
5	A/R	SUPER O-LUBE	LUBRICANT O-RING SILICONE
4	1	0183	NUT VS15-SS
3	A/R	PAVE-Seal 150	EPOXY BLACK
2	40'	BX20 CABLE	CABLE T/C 20 ANSI BX TWSH
1	1	0161	HOUSING VS15L-SS

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-.5
.X DECIMAL +/- .1 .XX DECIMAL +/- .02 .XXX DECIMAL +/-.005
ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS

PAVE technology co.
2751 Thunderhawk Court
Dayton, Ohio 45414-3445
U.S.A.
(937)890-1100
fax (937)890-5165
www.pavetechnologyco.com

DESCRIPTION PAVE-SealÆ Cable Harnesses

VS15L-SS-150-2P-BX20-360-120

PART NUMBER 1963

PROJECTION