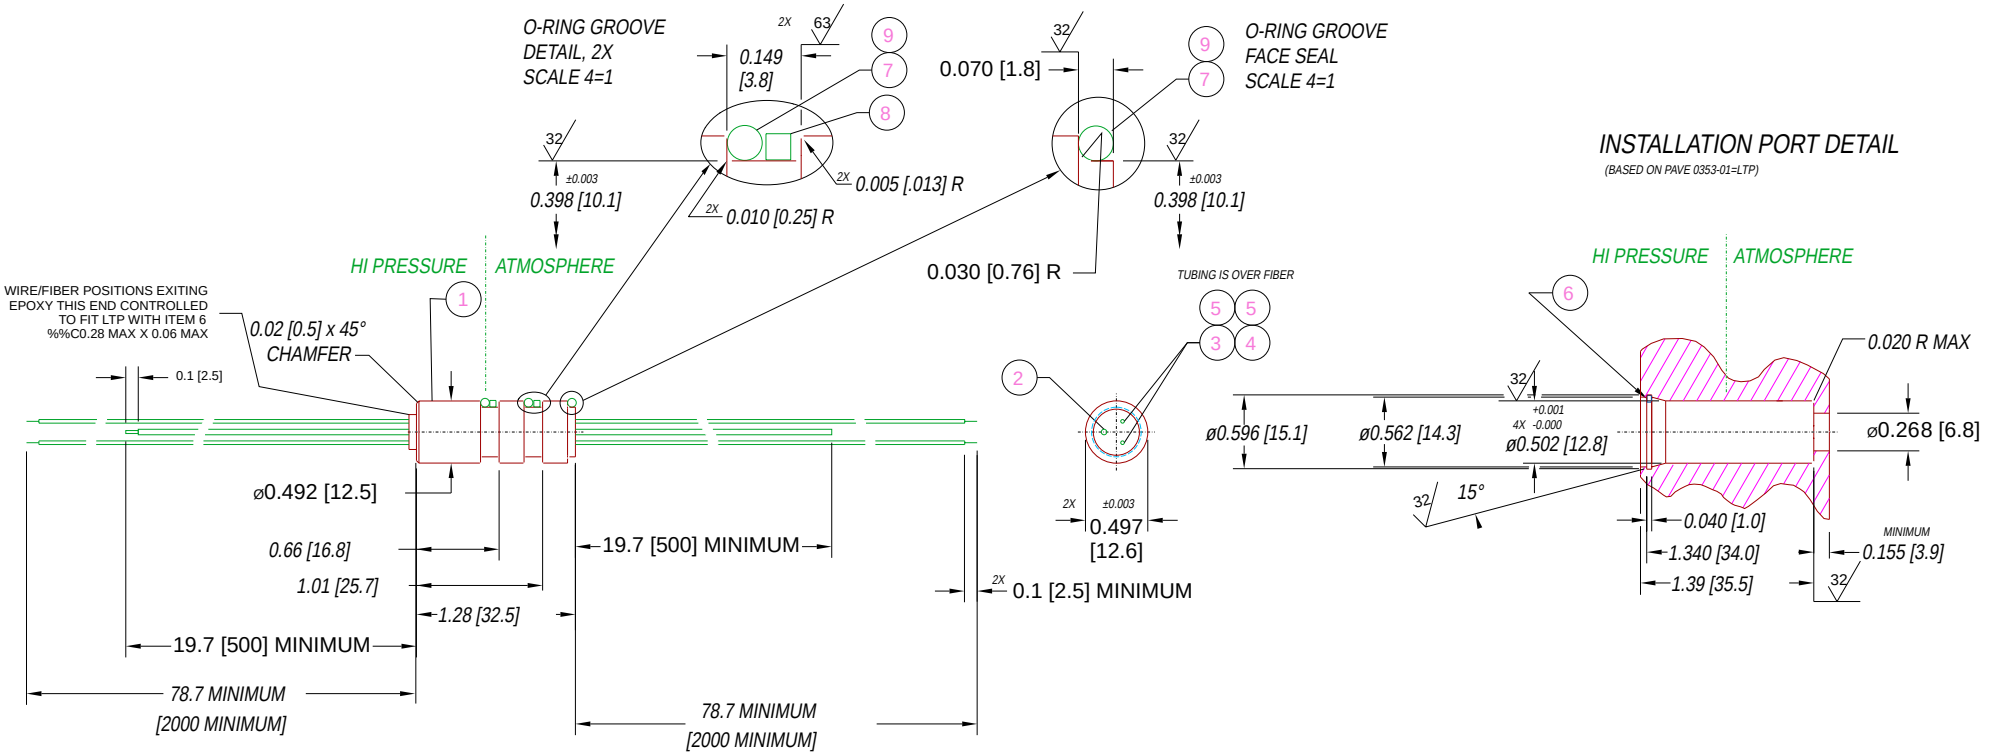

ITEM	QTY	PART NUMBER	DESCRIPTION
9	A/R	PARKER O-LUBE	LUBRICANT O-RING BARIUM BASED
8	2	B/U RING -012	BACK UP RING TEFLON SCARF CUT T1-012
7	3	-012 VITON	O-RING -012 VITON 75
6	(1)	WHM-50-S02	RING RETAINING SS ø.50 (NOT SUPPLIED)
5	2	O-STT-26	TUBING .018 TEFLON 26 GA
4	1	160321-001ORG	FIBER OPTICAL 50/125 MULTIMODE
3	1	160321-001BLU	FIBER OPTICAL 50/125 MULTIMODE
2	1	E24 BLACK	WIRE 24E MIL-W-16878/4 7/#32
1	A/R	PAVE-Seal 200	EPOXY BLACK

NOTES:
1. LEAK TEST: 10,000 PSI AIR OVER HYDRAULIC FLUID FOR 2 MINUTES
MINIMUM, NO VISIBLE BUBBLING IN WATER.
2. FIBER OPTIC CHECKED FOR OPTICAL CONTINUITY ONLY.
3. ALL TESTS ARE DONE AT ROOM TEMPERATURE.
4. OPTICAL FIBER SHALL NOT BE BENT SHARPER THAN A 2.0 RADIUS
AT ANY TIME DURING HANDLING, TESTING, OR SHIPPING.
5. DIMENSIONS IN INCHES [mm].

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-0.5
.X DECIMAL +/- 0.1 .XX DECIMAL +/- 0.02 .XXX DECIMAL +/-0.005
ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS

PAVE Technology Co.
2751 Thunderhawk Court
Dayton, Ohio 45414-3445
U.S.A.
(937)890-1100
fax (937)890-5165
www.pavetechnologyco.com

DESCRIPTION PAVE-Seal® Cable Harnesses
SP8/128-E-200-1/2-TE24/FO-2-2m

PART NUMBER 2625

REVISON LEVEL -

PROJECTION