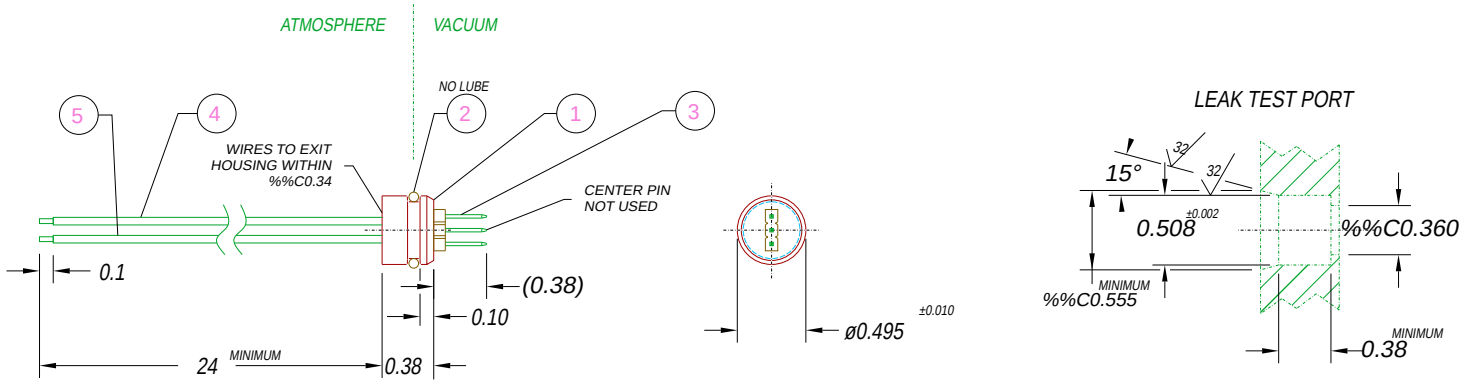

NOTES:
1. HE LEAK TEST @1 ATM. <10^ -7 CC/S.
(WIPE O-RING W/ METHANOL PRIOR TO INSTALLATION - NO O-RING LUBE)
2. HYPOT 630 VDC 500 MW 0.01 SEC MINIMUM, WIRE TO WIRE.
3. CONTINUITY TEST WIRE ENDS TO PINS <0.5W.
4. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.

ITEM	QTY	PART#	DESCRIPTION
5	24"	E22 BLACK	WIRE 22E MIL-W-16878/4 .010 7/#30
4	24"	E22 RED	WIRE 22E MIL-W-16878/4 .010 7/#30
3	1	MOL #22-28-4032	HEADER 3 POS 100 CL TIN SINGLE
2	1	-012 VITON	O-RING -012 VITON 75
1	1	1226-S	HOUSING SP8S-E

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN MM
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-13
.X DECIMAL +/- 2.5 .XX DECIMAL +/- .50 .XXX DECIMAL +/-.100
ANGLES +/- 1 DEG SURFACE FINISH 3.2 micrometers RMS

PAVE technology co.
2751 Thunderhawk Court
Dayton, Ohio 45414-3445
U.S.A.
(937)890-1100
fax (937)890-5165
www.pavetechnologyco.com

DESCRIPTION PAVE-Mate® II Connectors
SP8S-E-150-2-TE22-24-3PINS(MOLEX)

PART NUMBER 2384

PROJECTION