

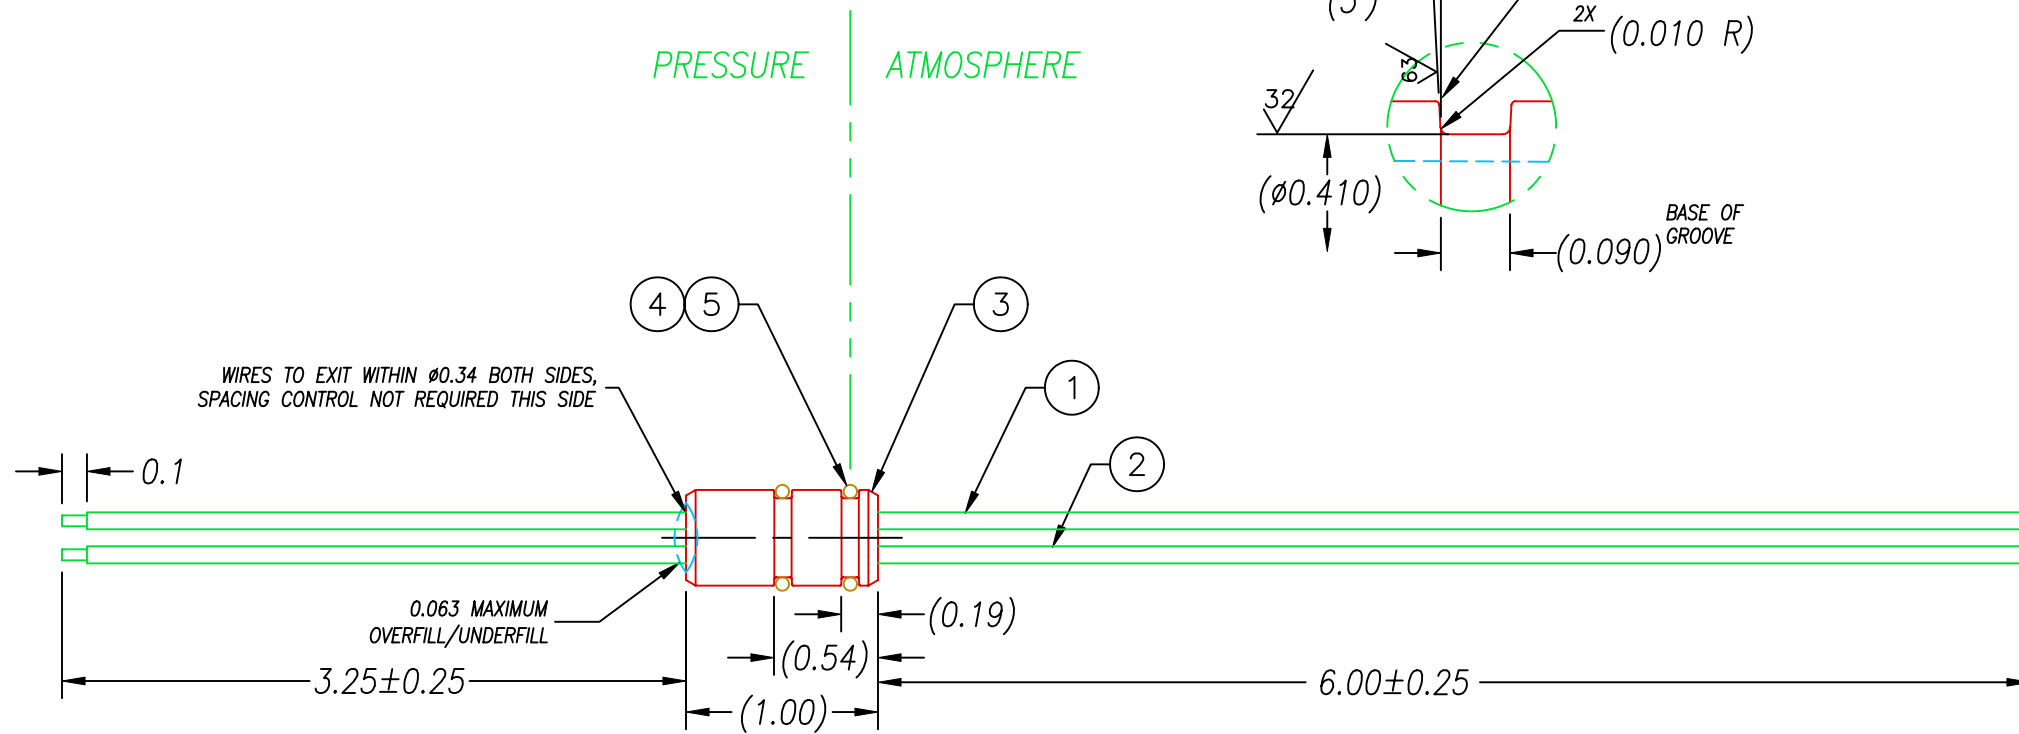


O-RING GROOVE DETAIL
SCALE 4=1, 2X

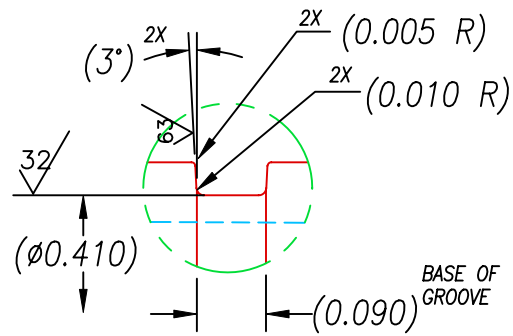

INSTALLATION PORT

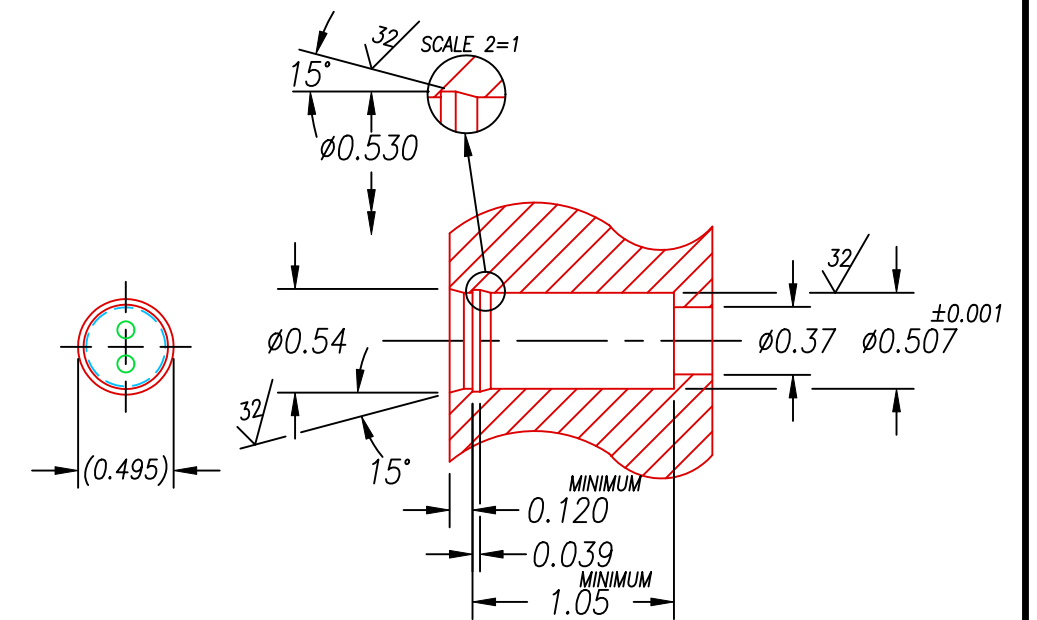

NOTES:

1. LEAK TEST: 80 PSI, NO BUBBLES 30 SECONDS MINIMUM.
2. HYPOT 630 VDC 500 MΩ 0.01 SEC MINIMUM, WIRE TO WIRE.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. PERCENTAGE OF PARTS TESTED WILL BE 100% (MAY BE A LESSER PERCENTAGE FOR LARGE PRODUCTION QUANTITIES, UNLESS OTHERWISE NOTED OR REQUIRED).
5. WIRES MUST BE FLEXIBLE AS THEY EXIT HOUSING.
6. NO VOIDS LARGER THAN Ø0.035 ARE ACCEPTABLE.
7. REF- TEMPERATURE RANGE OF USE: -20 TO 150°C.

5	A/R	PARKER O-LUBE	LUBRICATION O-RING BARIUM BASED
4	2	-012 VITON	O-RING -012 VITON 75
3	A/R	PAVE-Seal 150	EPOXY BLACK
2	1	TZZ16 RED	WIRE 16TZZ XL-ETFE .016 WALL MIN .011 19 STRAND
1	1	TZZ16 BLACK	WIRE 16TZZ XL-ETFE .016 WALL MIN .011 19 STRAND
ITEM	QTY	PART NUMBER	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-0.5
.X DECIMAL +/- 0.1 .XX DECIMAL +/- 0.02 .XXX DECIMAL +/-0.005
ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS

2751 Thunderhawk Court
Dayton, Ohio 45414-3445
U.S.A.
(937)890-1100
fax (937)890-5165
www.pavetechnologyco.com

PAVE technology co.

DESCRIPTION PAVE-Seal® Cable Harnesses
SP8L-E-150-2-TZZ16-4-6

PART NUMBER
2918

REVISION LEVEL
-

PROJECTION