


NO EPOXY ON OR BEYOND THIS SURFACE OR THREADS, BOTH SIDES

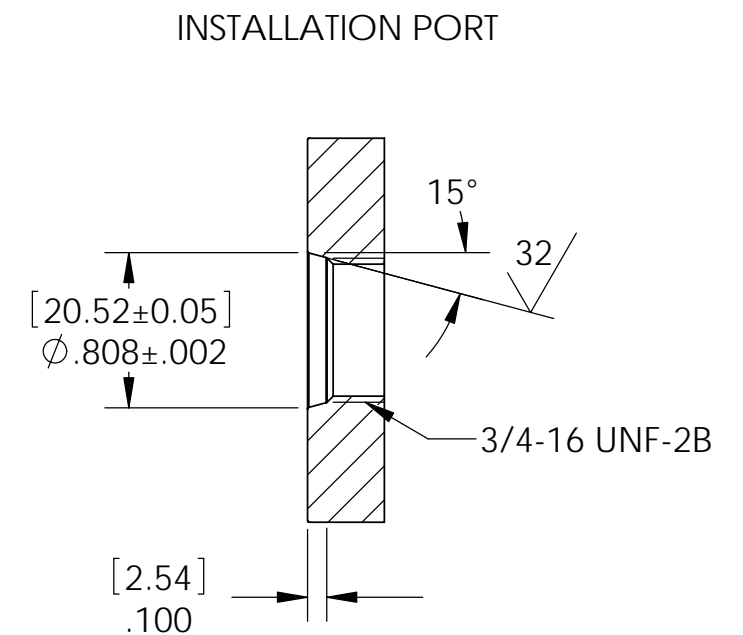

NOTES:

1. LEAK TEST: 80 PSI, NO BUBBLES 30 SECONDS MINIMUM.
2. HYPOT 1000 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM ROD TO HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. VOIDS SMALLER THAN Ø.035 [ .89 ] ARE ACCEPTABLE.
6. REF-OPERATING TEMPERATURE -20 °C TO 150 °C.
7. DIMENSIONS ARE INCHES [millimeters].

7	1	3438	HOUSING SO12-SS
6	1	-908 BUNA	O-RING -908 BUNA 75
5	2	BRASS NUTS 1/4"	NUT BRASS WAF 7/16 THK 7/32
4	4	BRASS WASH 1/4"	WASHER BRASS ID .260 OD .6875 THK .051
3	1	3149	ROD .25 COPPER HIGH CURRENT
2	A/R	PAVE-Seal 200 HV	EPOXY BLUE
1	A/R	PARKER O-LUBE	O-RING LUBRICANT BARIUM BASED
ITEM	QTY	PART NUMBER	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.  
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5  
 X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005  
 ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS

**PAVE technology co.**

2751 Thunderhawk Court  
Dayton, OH 45414-3445  
U.S.A.  
tel (937) 890-1100  
fax (937) 8905165  
www.pavetechnologyco.com

DESCRIPTION  
SO12-SS-200-1-.25-22-33mm

PART NUMBER  
**3132**

MATERIAL NOTED

REVISION LEVEL  
E

PROJECTION