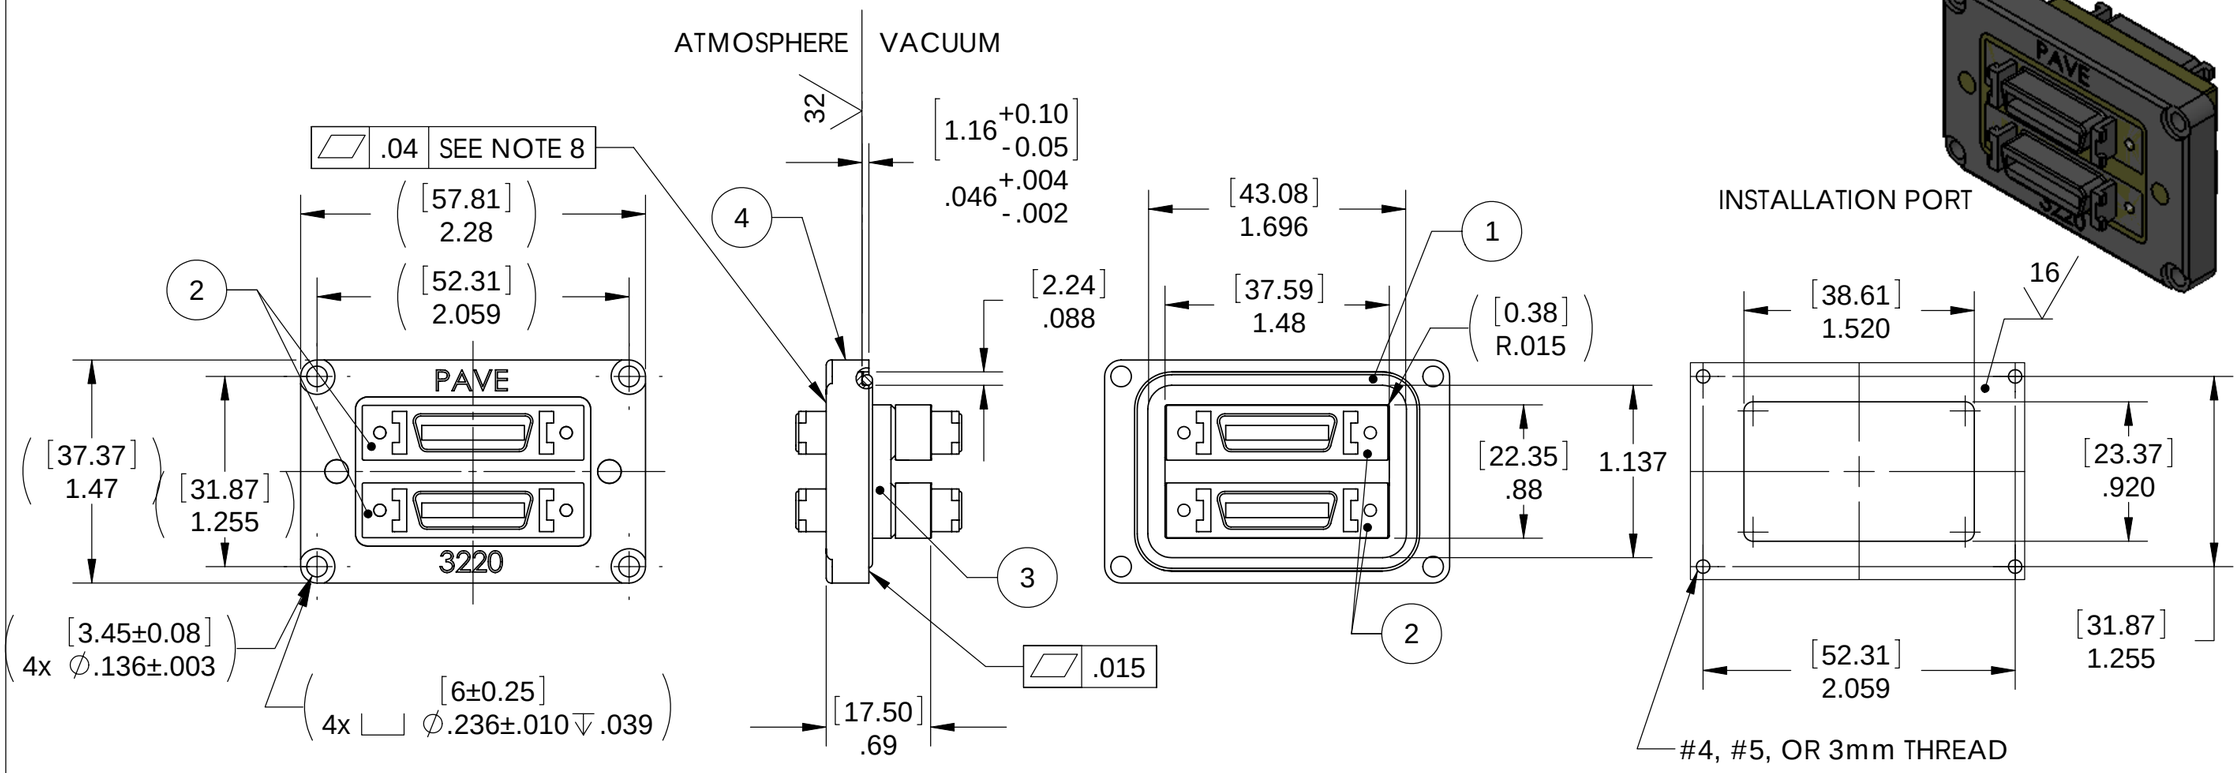

NOTES:
1. HE LEAK TEST @ 1 ATM 10x10^-8 CC/SEC OR LESS.
2. HYPOT 500 VDC 500 MEGAOHMS MINIMUM 0.01 SECOND MINIMUM MATING CONNECTOR TO MATING CONNECTOR.
3. CONTINUITY TEST 0.5 Ohms MAXIMUM RESISTANCE MATING CONNECTOR TO MATING CONNECTOR.
4. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
5. NO VOIDS ARE ACCEPTABLE ON O-RING SEALING SURFACES, VOIDS SMALLER THAN ∅0.035 ARE ACCEPTABLE ON ALL OTHER SURFACES.
6. ALL PARTS MUST PASS ALL TESTS
7. DIMENSIONS ARE INCHES [MILLIMETERS].
8. FLATNESS INCLUDES TOP PLATE AND EACH RECEPTACLE FLANGE.

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5
X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005
ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS

ITEM	QTY	PART NUMBER	DESCRIPTION
4	1	3264	PLATE TOP AL6061 PAVE-MATE I
3	A/R	PAVE-Seal 150	EPOXY BLACK
2	4	10226-6212VC	CONNECTOR DSUB 26 CONTACTS PITCH .050"
1	1	-031 VITON	O-RING -031 VITON 75

PAVE technology co.
2751 Thunderhawk Court
Dayton, OH 45414-3445
U.S.A.
tel (937) 890-1100
fax (937) 8905165
www.pavetechnologyco.com

DESCRIPTION: SP36/24-E-150-52-25-DSUB-DSUB

PART NUMBER: 3220

MATERIAL: NOTED

REVISION LEVEL: A

PROJECTION