


STAMP OR ETCH OR ENGRAVE  
.12" HIGH MANUFACTURER NAME  
AS SHOWN




HIGH PRESSURE SIDE  
SEE NOTE 4

480 PSI

HIGH PRESSURE SIDE  
SEE NOTE 4

600 PSI

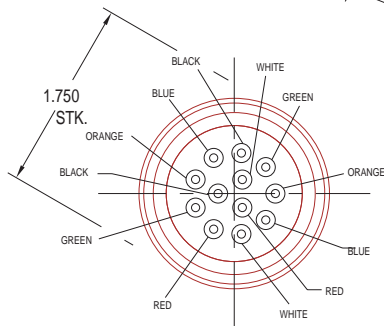


APPROXIMATE WIRE LOCATIONS

8 WIRES OMMITTED  
FOR CLARITY

PAVESEAL 200FR  
FLAME RETARDENT  
EPOXY

PAVE #1138 PTN20-PS  
HOUSING (REF-12L14  
STEEL W/ Zn PLATE &  
YELLOW DICHROMATE)

CAROL #09412 CABLE,  
12 x #14AWG WIRES  
(CABLE CENTERED  
WITHIN 1/8" OF  
C/L)

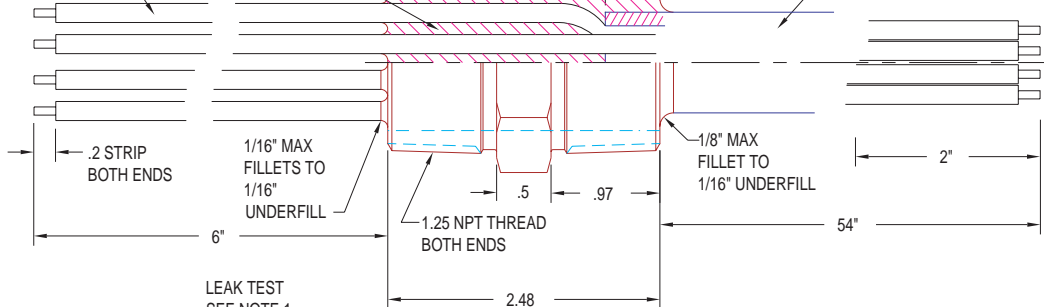


LEAK TEST  
SEE NOTE 1

80 PSI

NOTES:

1. LEAK TEST: 80 PSI AIR, 2 MINUTES, NO VISIBLE BUBBLES.
2. ELECTRICAL TEST: 630 VDC HYPOT, 500 MEGOHMS MIN, 1 OHM CONTINUITY WIRE TO WIRE AND HOUSING.
3. ELECTRICAL TEST: 2200 VAC FOR 1 SECOND, WIRE TO ALL OTHERS AND HOUSING, 5mA MAX LEAKAGE.
4. REF-PRODUCT QUALIFICATION TESTING BY BALDOR.

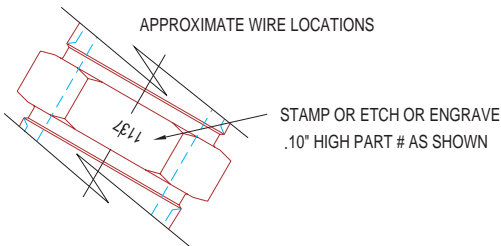

STAMP OR ETCH OR ENGRAVE  
.10" HIGH PART # AS SHOWN

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES  
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/- .5  
.X DECIMAL +/- .1 .XX DECIMAL +/- .02 .XXX DECIMAL +/- .005  
ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS

2751 Thunderhawk Court  
Dayton, Ohio 45414-3445  
U.S.A.  
(513) 890-1100  
fax (513) 890-5165  
www.pave technology co.

DESCRIPTION  
**PTN20 x 12 #14 ASY**  
PART NUMBER  
**1137**  
PROJECTION