



NO EPOXY OR DAMAGE ALLOWED ON KNIFE EDGE

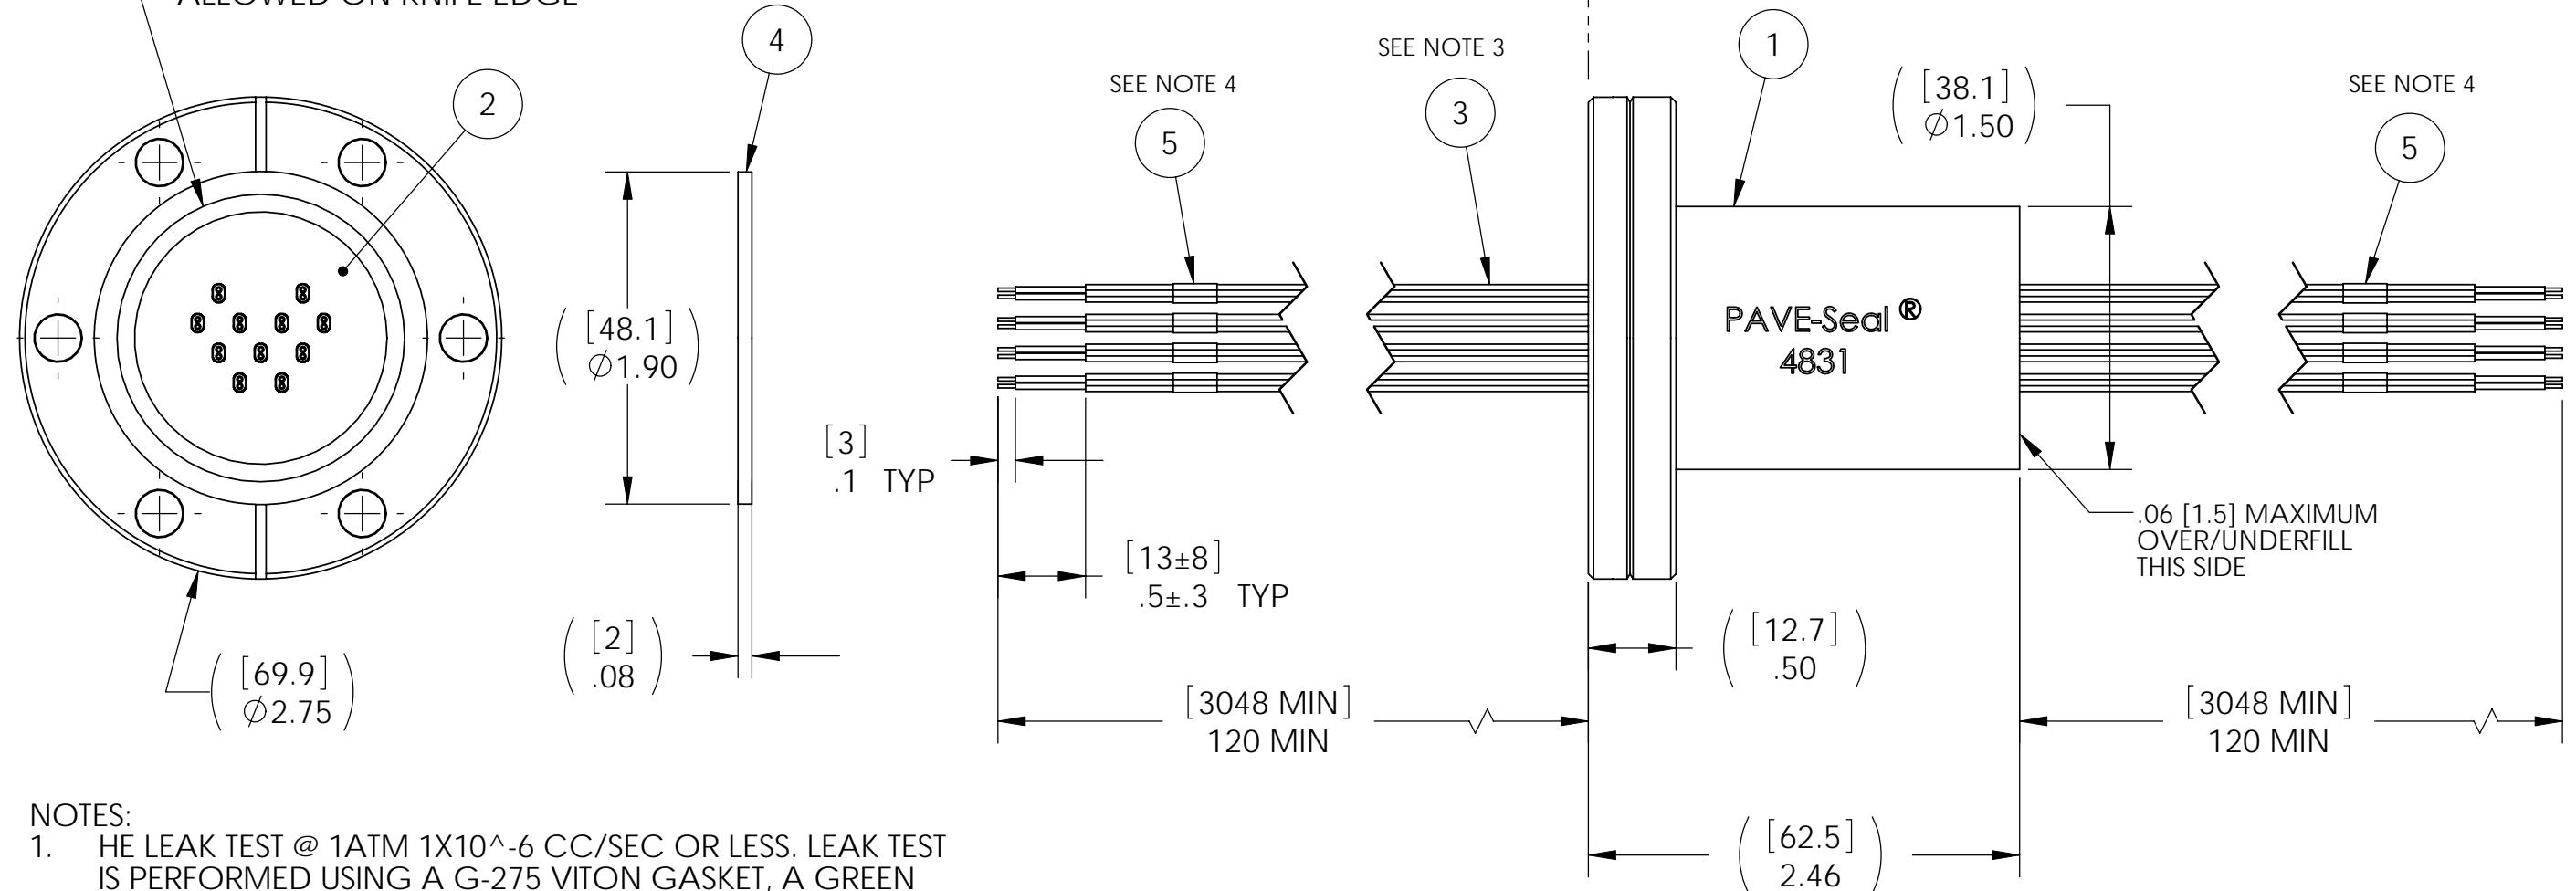


NOTES:

1. HE LEAK TEST @ 1ATM 1X10⁻⁶ CC/SEC OR LESS. LEAK TEST IS PERFORMED USING A G-275 VITON GASKET, A GREEN PAINT DOT INDICATES THE PART HAS PASSED THE TEST.
2. HYPOT 630 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE AND HOUSING.
3. MINIMUM QUANTITY 10 OF ITEM 3 REQUIRED.
4. BOTH SIDES OF ITEM 3 WILL BE MARKED WITH CORRESPONDING NUMBERS OR LETTERS.
5. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
6. ALL PARTS MUST PASS ALL TESTS.
7. WIRE POSITIONING IS APPROXIMATE & VARIABLE.
8. COSMETIC SURFACE VOIDS SMALLER THAN $\phi 0.035$ [0.89] ARE ACCEPTABLE.
9. DIMENSIONS ARE INCHES [millimeters].
10. REF-OPERATING TEMPERATURE -20°C TO 125°C.
11. PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.

5	A/R	-	BRADY WIRE MARKERS
4	1	GASKET G-275 C	GASKET COPPER
3	11	RT24	CABLE T/C TYPE R/S 24AWG FEP TEFLON
2	A/R	PAVE-Seal 150	EPOXY BLACK
1	1	1473	HOUSING CF275-SS
ITEM	QTY	PART NUMBER	DESCRIPTION


 2751 Thunderhawk Court
 Dayton, OH 45414-3445
 U.S.A.
 tel (937) 890-1100
 fax (937) 8905165
 www.pavetechnologyco.com

DESCRIPTION
 CF275-SS-150-10P-RT24-120-120

PART NUMBER	MATERIAL	NOTED
4831	REVISION LEVEL	A
		PROJECTION
		

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ± 0.5
 X.X DECIMAL ± 0.1 X.XX DECIMAL ± 0.02 X.XXX DECIMAL ± 0.005
 ANGLES ± 1 DEGREE SURFACE FINISH 128 microinch RMS