



PAVE#	"A"
3473	10,000
3473-1	1,500

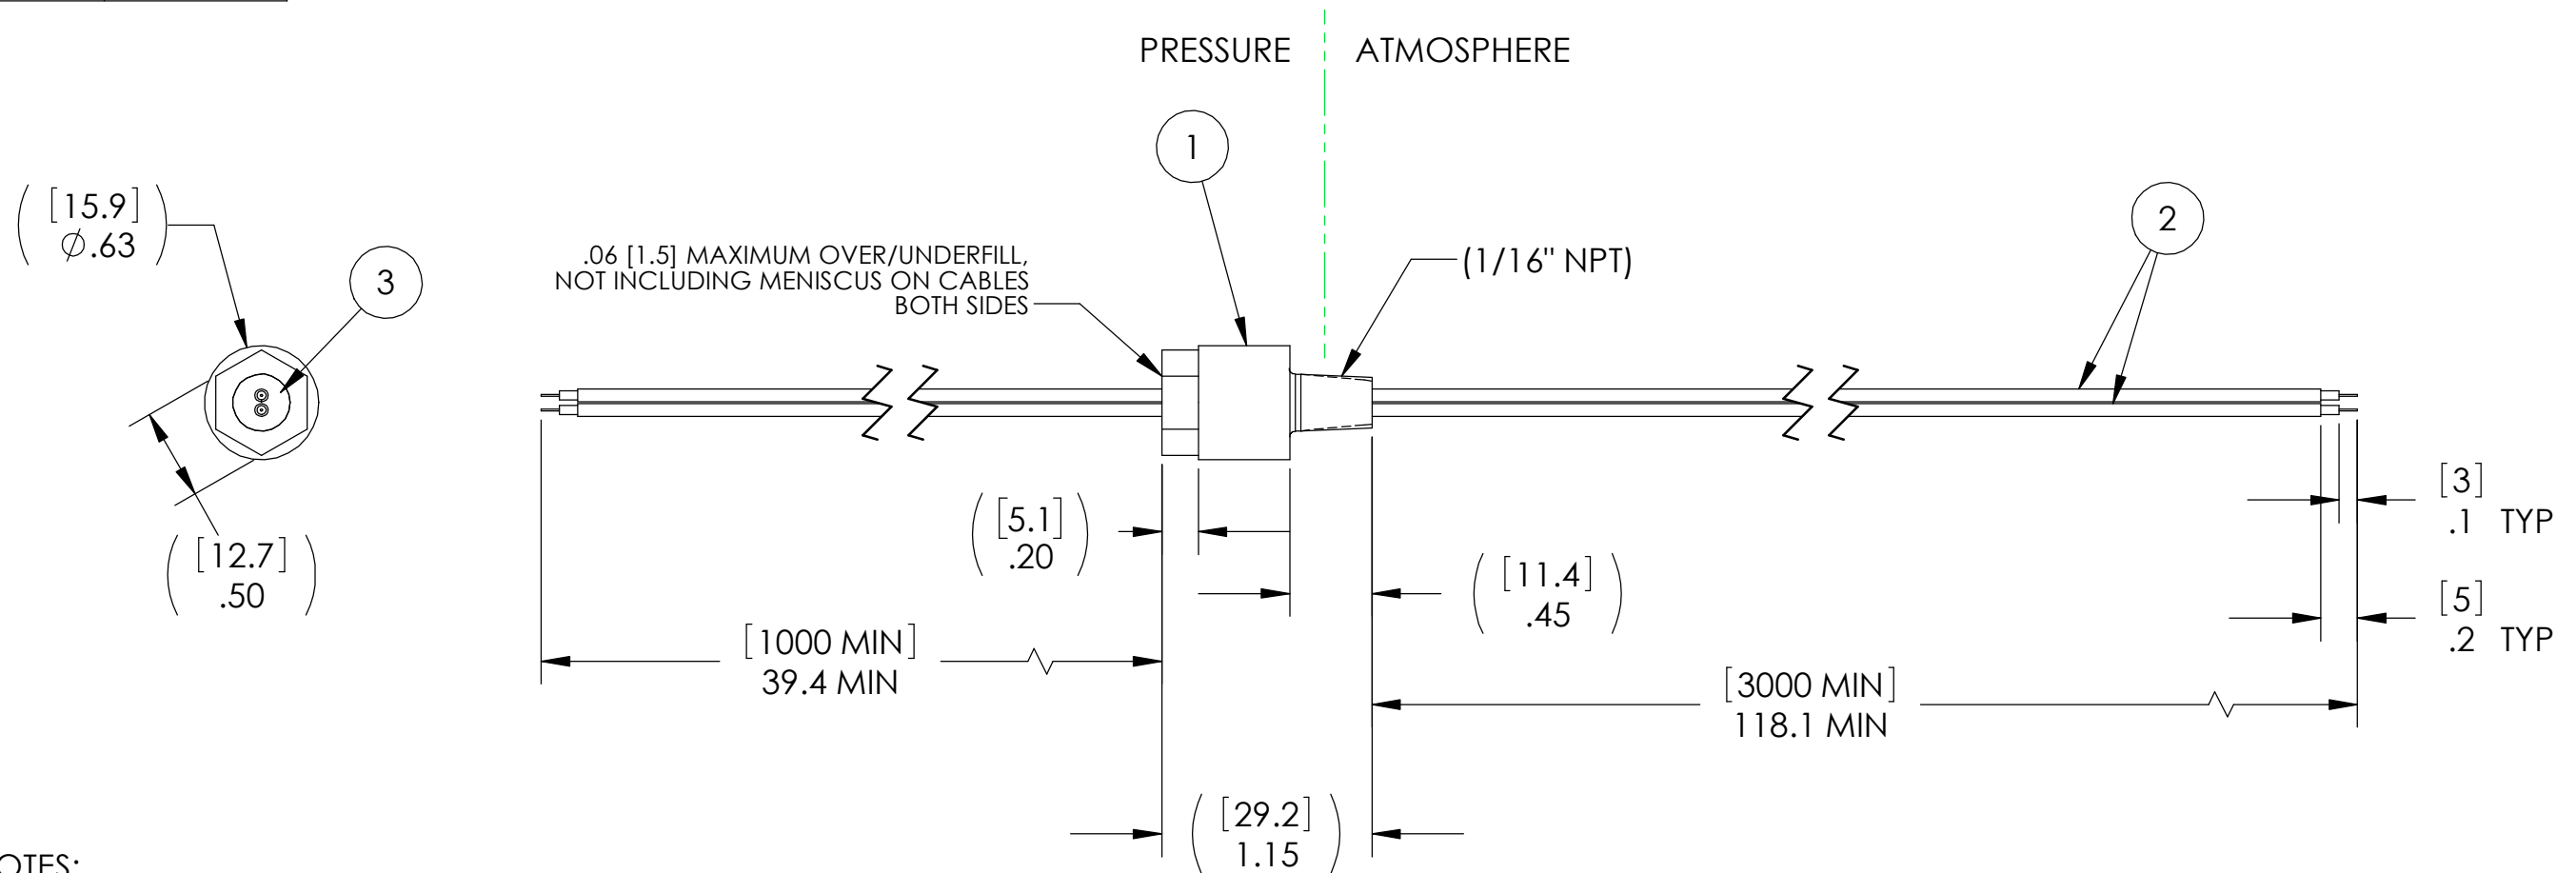

NOTES:

- LEAK TEST: "A" PSI, NO BUBBLES 2 MINUTES MINIMUM. A GREEN PAINT DOT INDICATES THE PART HAS PASSED THE TEST.
- HYPOT 630 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM CONDUCTOR TO CONDUCTOR TO SHIELDS AND HOUSING.
- CONTINUITY TEST SHIELDS < 0.5 OHM END TO END.
- ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
- ALL PARTS MUST PASS ALL TESTS.
- WIRE POSITIONING IS APPROXIMATE & VARIABLE.
- COSMETIC SURFACE VOIDS SMALLER THAN $\phi 0.035$ [0.89] ARE ACCEPTABLE.
- REF-OPERATING TEMPERATURE -20 °C TO 150 °C.
- DIMENSIONS ARE INCHES [millimeters].
- PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.

3	A/R	PAVE-Seal 200	EPOXY BLACK
2	2	RG178	WIRE COAX M17/93 FEP 7 STRAND SILVER-COATED WIRE O.D. .071
1	1	3511	HOUSING PT1 303 SS HP
ITEM	QTY	PART NUMBER	DESCRIPTION


 2751 Thunderhawk Court
 Dayton, OH 45414-3445
 U.S.A.
 tel (937) 890-1100
 fax (937) 8905165
www.pavetechnologyco.com

DESCRIPTION
 PT1-SS-200-2-RG178-1-3M

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5
 X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005
 ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS

PART NUMBER	SEE TABLE	MATERIAL	NOTED
3473		REVISION LEVEL	C
		PROJECTION	