



Trace Attributes

Window ID	Trace	Channel	Correction	Options	Marker	Position	Response
1	S11	1	C 2-Port		1	7274.875 MHz	1.7393
2	S22	1	C 2-Port		1	4851.625 MHz	1.6929
3	S21 / M	1	C 2-Port		1	17865.375 MHz	-3.8442 dB
4	S12 / M	1	C 2-Port		1	17910.25 MHz	-3.8403 dB


Window 1 (1) S11 Units
SWR C 2-Port

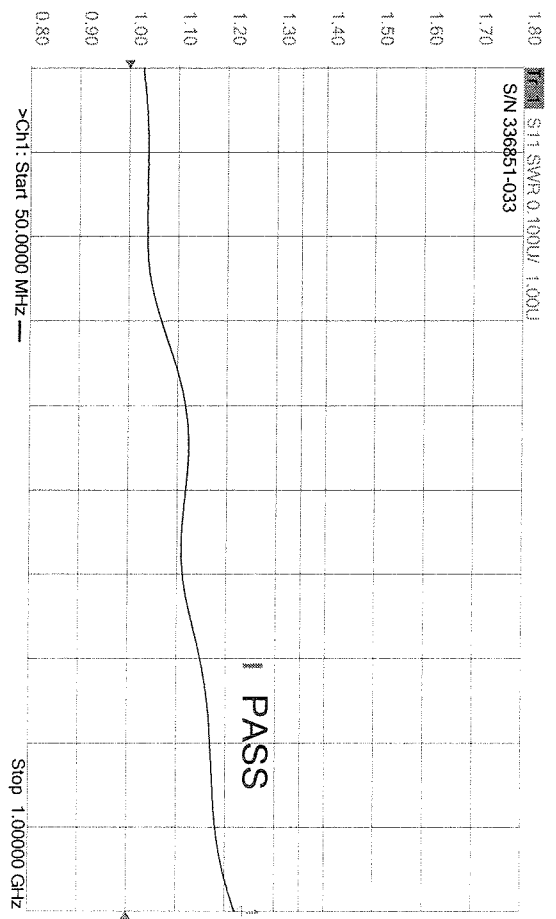


Window 2 (1) S22 Units
SWR C 2-Port

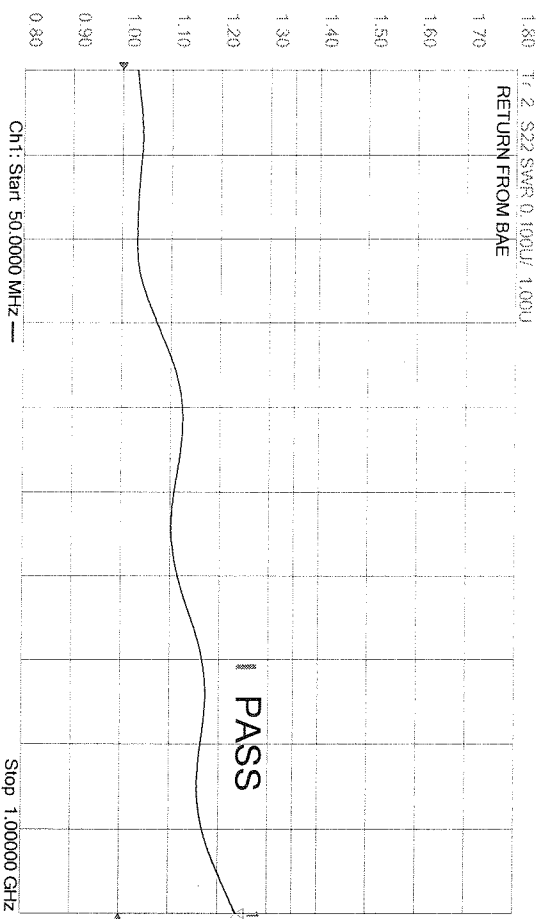

Window 3 (1) S21 dB
LogMag C 2-Port

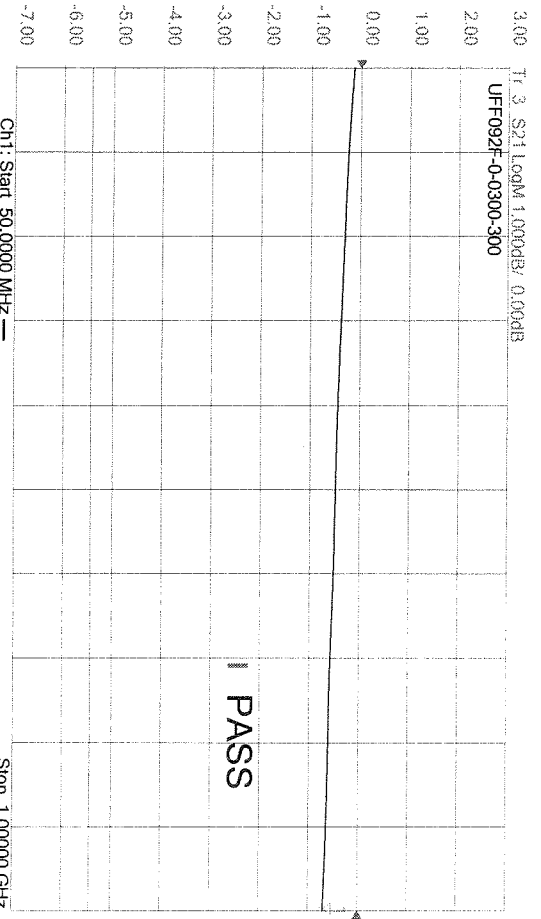

Window 4 (1) S12 dB
LogMag C 2-Port

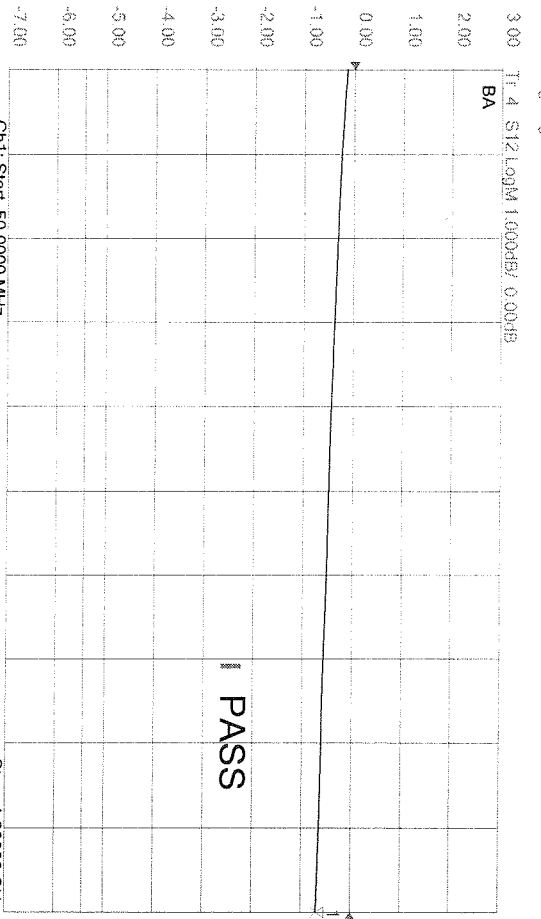


Trace Attributes

Window	ID	Trace	Channel	Correction	Options	Marker	Position	Response
1	1	S11	1	C 2-Port		1	1000 MHz	1.2200
2	1	S22	1	C 2-Port		1	1000 MHz	1.2374
3	1	S21	1	C 2-Port		1	997.625 MHz	-0.69543 dB
4	1	S12	1	C 2-Port		1	1000 MHz	-0.69659 dB

Window 1 (1) S11 Units
Real C 1-Port


Tr 1 S11 Real 10.00mU/ 0.00mU
S/N 336851-033 RETURN FROM BAE P1

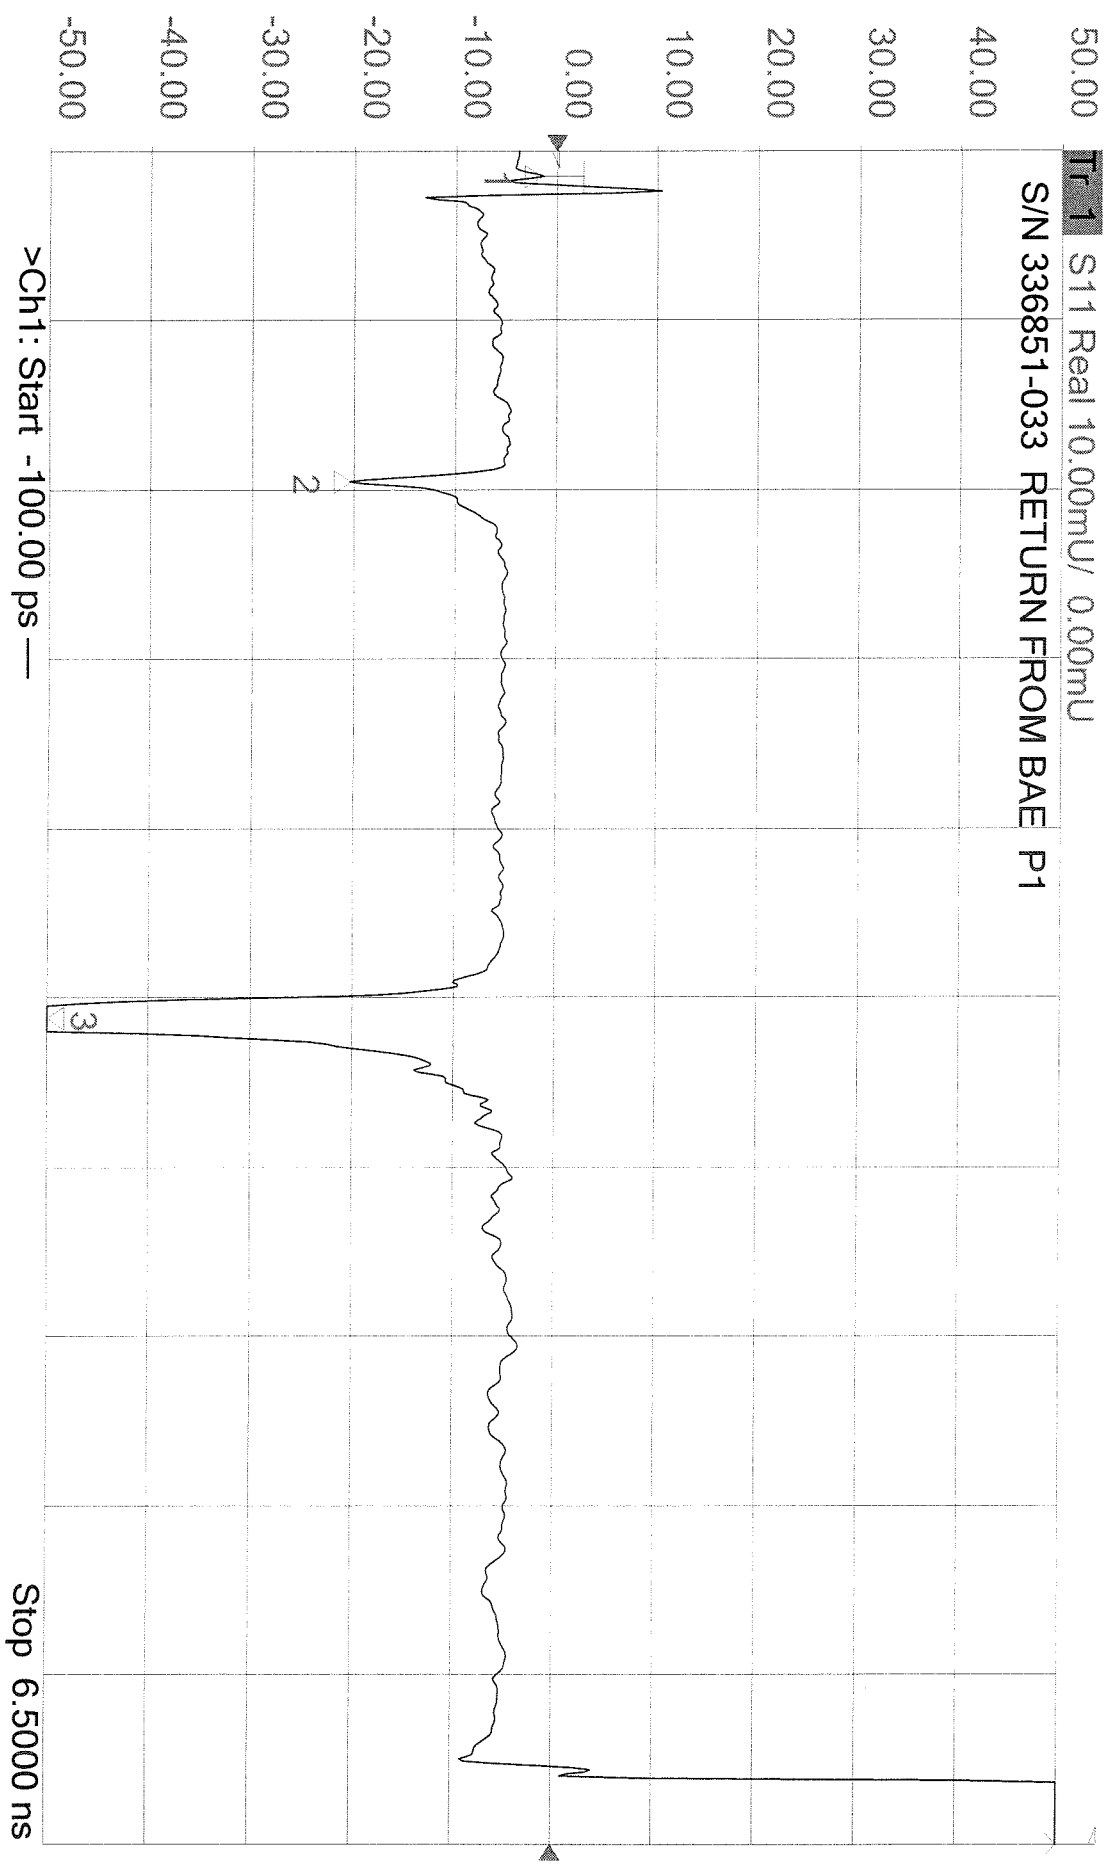

Trace Attributes

Window	ID	Trace	Channel	Correction	Options	Marker	Position	Response
1	1	S11	1	C-1-Port	T	1	0 ns	-1.5149 mU
						2	1.188 ns	-20.287 mU
						3	3.2802 ns	-158.05 mU

Window 1 (1) S11 Units
Real C 1-Port

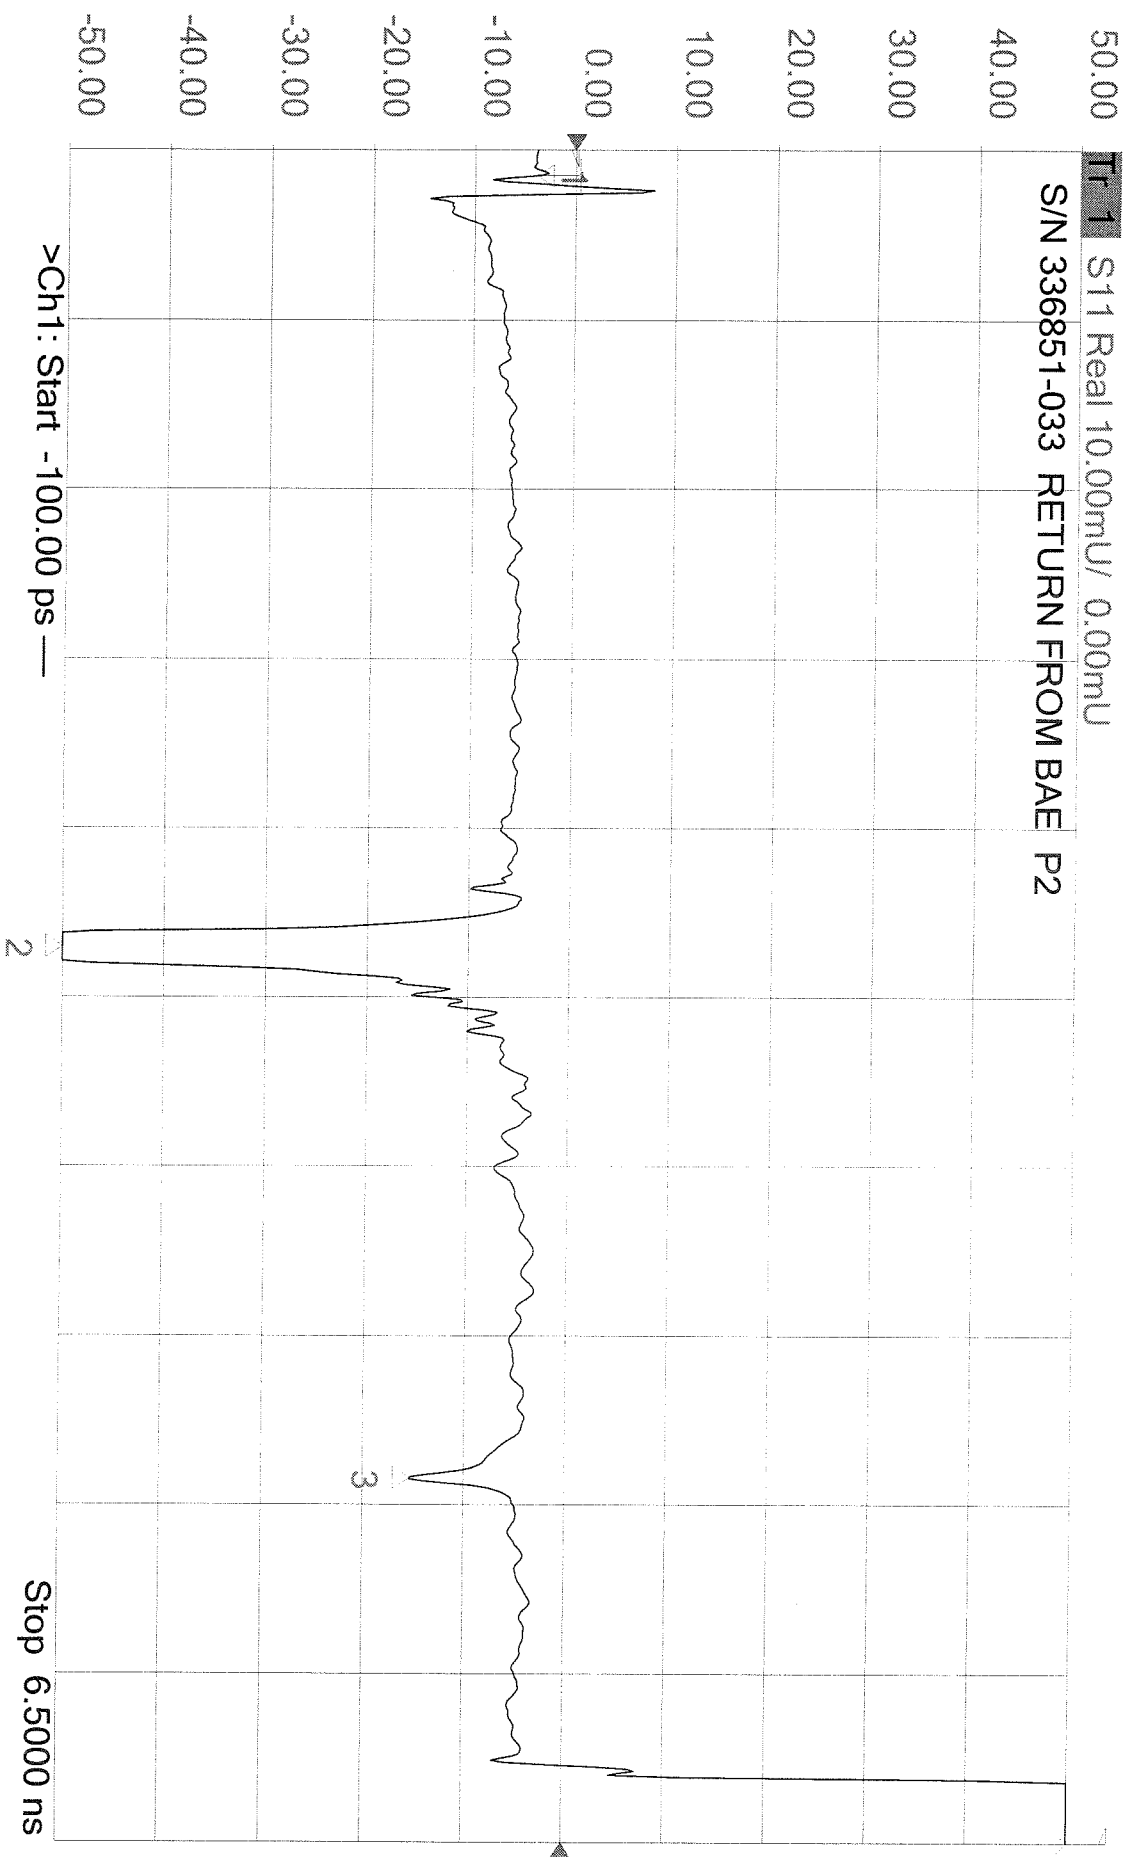

Trace Attributes						
Window ID	Trace Channel	Correction	Options	Marker	Position	Response
1	S11	1	C-1-Port	T	1	0 ns -3.8458 mU
					2	3.003 ns -177.31 mU
					3	5.0754 ns -15.325 mU