


PAVE#	A	B	"X"	DESCRIPTION	PART#
2035	180 [4572]	36 [914]	9	VS8-SS-150-1P-SX20-180-36	SX20 CABLE
2035-1	12 [305]	100 [2540]	5	VS8-SS-150-1P-SX20-12-100	SX20 CABLE
2035-2	480 [12192]	36 [914]	22	VS8-SS-150-1P-SX20-480-36	SX20 TWSH

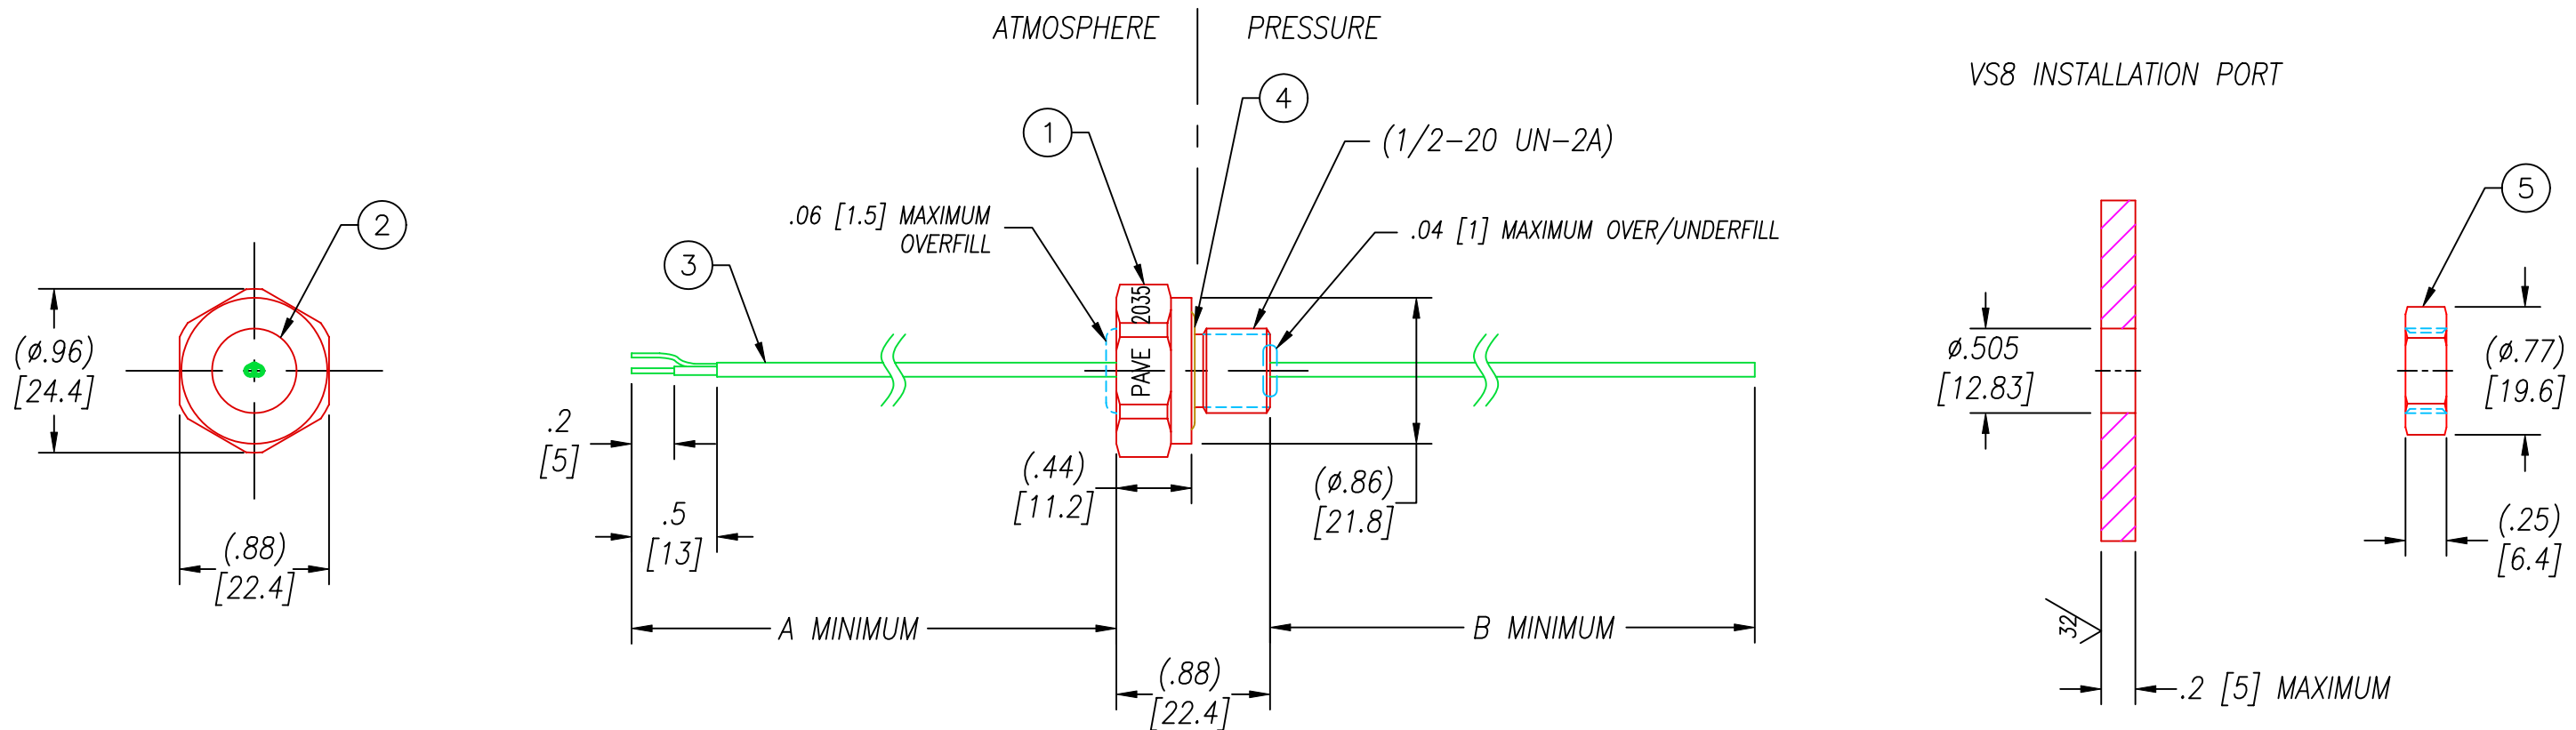

NOTES:

1. LEAK TEST: 80 PSI, NO BUBBLES "X" MINUTES MINIMUM.
2. HYPOT 630 VDC 500 M Ω 0.01 SEC MINIMUM, WIRE TO WIRE, DRAIN WIRE & HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. CABLE IS NOT REQUIRED TO BEND SHARPLY AT EPOXY SEAL SURFACE.
6. NO VOIDS LARGER THAN $\phi 0.035$ [0.89] ARE ACCEPTABLE.
7. DIMENSIONS ARE INCHES [millimeters].
8. PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.

5	1	0894	NUT VS8-SS
4	1	-112 VITON	O-RING -112 VITON 75
3	1	SEE TABLE	CABLE T/C 20 ANSI SX TWSH
2	A/R	PAVE-Seal 150	EPOXY BLACK
1	1	0892	HOUSING VS8-SS 316SS
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-0.5
 .X DECIMAL +/- 0.1 .XX DECIMAL +/- 0.02 .XXX DECIMAL +/-0.005
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS

PAVE technology co.
 2751 Thunderhawk Court
 Dayton, Ohio 45414-3445
 U.S.A.
 (937)890-1100
 fax (937)890-5165
 www.pavetechnologyco.com

DESCRIPTION PAVE-Seal@ Cable Harnesses
 SEE TABLE

PART NUMBER
 2035

REVISION LEVEL
 D
 PROJECTION