
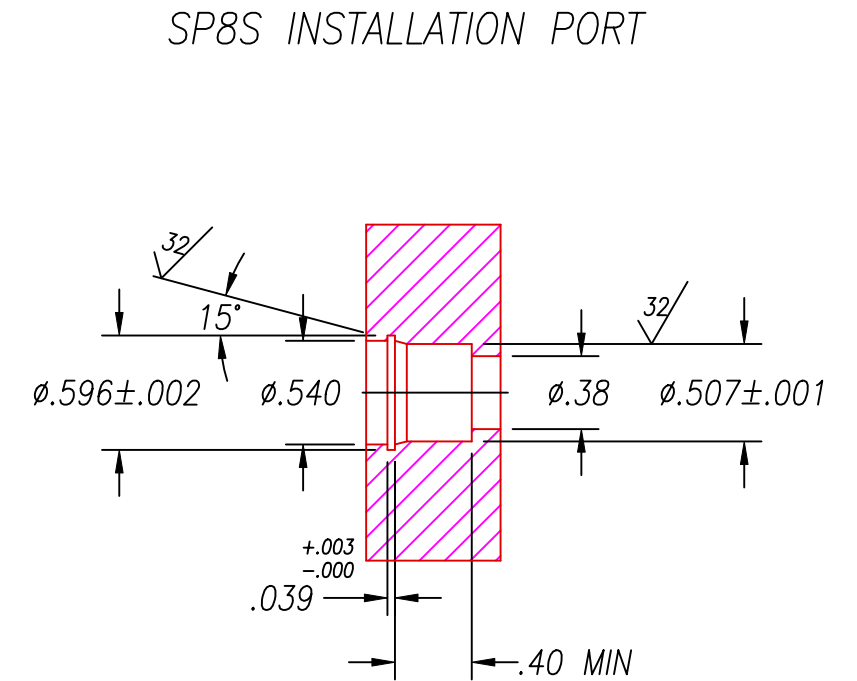
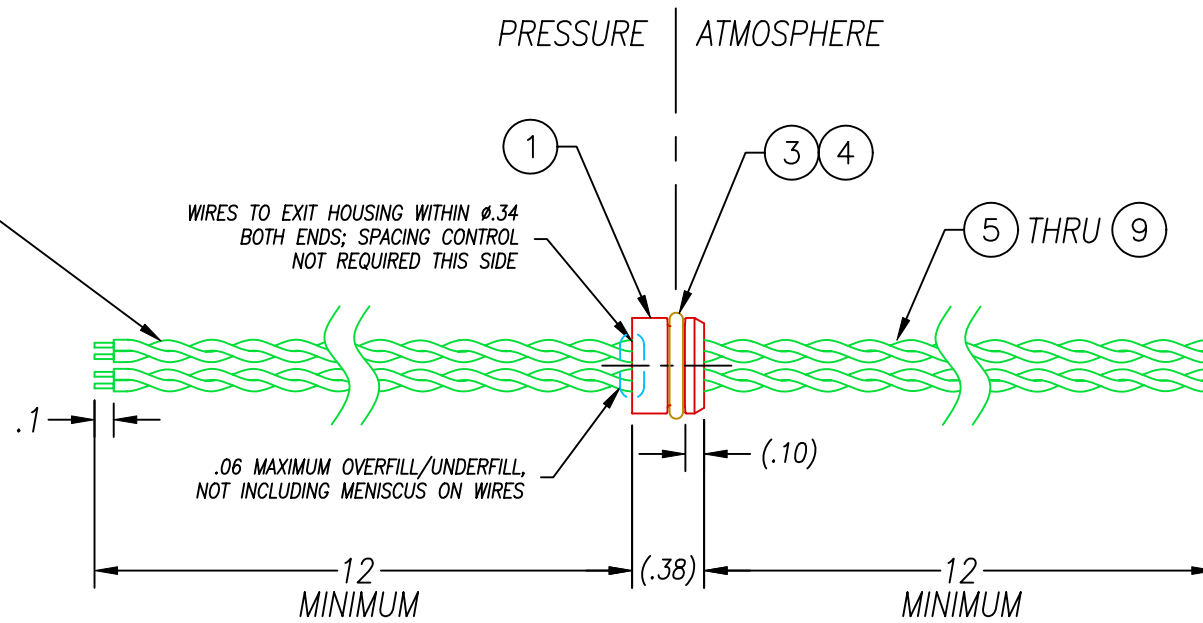


TWISTED PAIRS	COLORS TWISTED
TP1	GREEN/WHITE
TP2	RED/BLACK
TP3	BLUE/BLACK

3 TO 6 TWISTS PER INCH

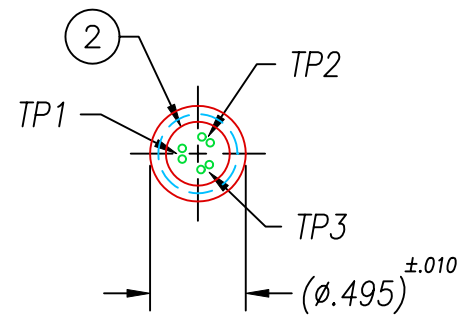

RECOMMENDED RETAINING RING
TRUARC N5000-56 OR EQUAL

NOTES:

1. LEAK TEST: 80 PSI, NO BUBBLES 1 MINUTE MINIMUM.
2. HYPOT 630 VDC 500 MΩ 0.01 SEC MINIMUM, WIRE TO WIRE.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. WIRES ARE NOT REQUIRED TO BEND SHARPLY AT EPOXY SEAL SURFACE.
6. NO VOIDS ARE ACCEPTABLE ON O-RING SEALING SURFACES, VOIDS SMALLER THAN φ.035 ARE ACCEPTABLE ON ALL OTHER SURFACES.
7. OPERATING TEMPERATURE RANGE: -10° TO 50°C.
8. OPERATING PRESSURE: 200 PSI MAXIMUM.

9	2	IPC24 U1429 BLK	WIRE 24IPC UL1429 .010 7/#32
8	1	IPC24 U1429 BLU	WIRE 24IPC UL1429 .010 7/#32
7	1	IPC24 U1429 GRN	WIRE 24IPC UL1429 .010 7/#32
6	1	IPC24 U1429 RED	WIRE 24IPC UL1429 .010 7/#32
5	1	IPC24 U1429 WHT	WIRE 24IPC UL1429 .010 7/#32
4	A/R	PARKER O-LUBE	LUBRICANT O-RING BARIUM BASED
3	1	-012 BUNA	O-RING -012 BUNA 75
2	A/R	PAVE-Seal 150	EPOXY BLACK
1	1	1226S	HOUSING SP8S-E
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-0.5
.X DECIMAL +/- 0.1 .XX DECIMAL +/- 0.02 .XXX DECIMAL +/-0.005
ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS

2751 Thunderhawk Court
Dayton, Ohio 45414-3445
U.S.A.
(937)890-1100
fax (937)890-5165
www.pavetechnologyco.com

PAVE technology co.

DESCRIPTION PAVE-Seal Cable Harnesses
SP8S-E-150-3P-IPC24-12-12

PART NUMBER 0889

REVISION LEVEL E

PROJECTION