


PART#	DESCRIPTION	"X"	"Y"	"Z"
1655	PT16-SS-150-10-TZ12-120-120	120 [3048]	120 [3048]	10
1655-1	PT16-SS-150-10-TZ12-36-240	36 [914]	240 [6096]	12

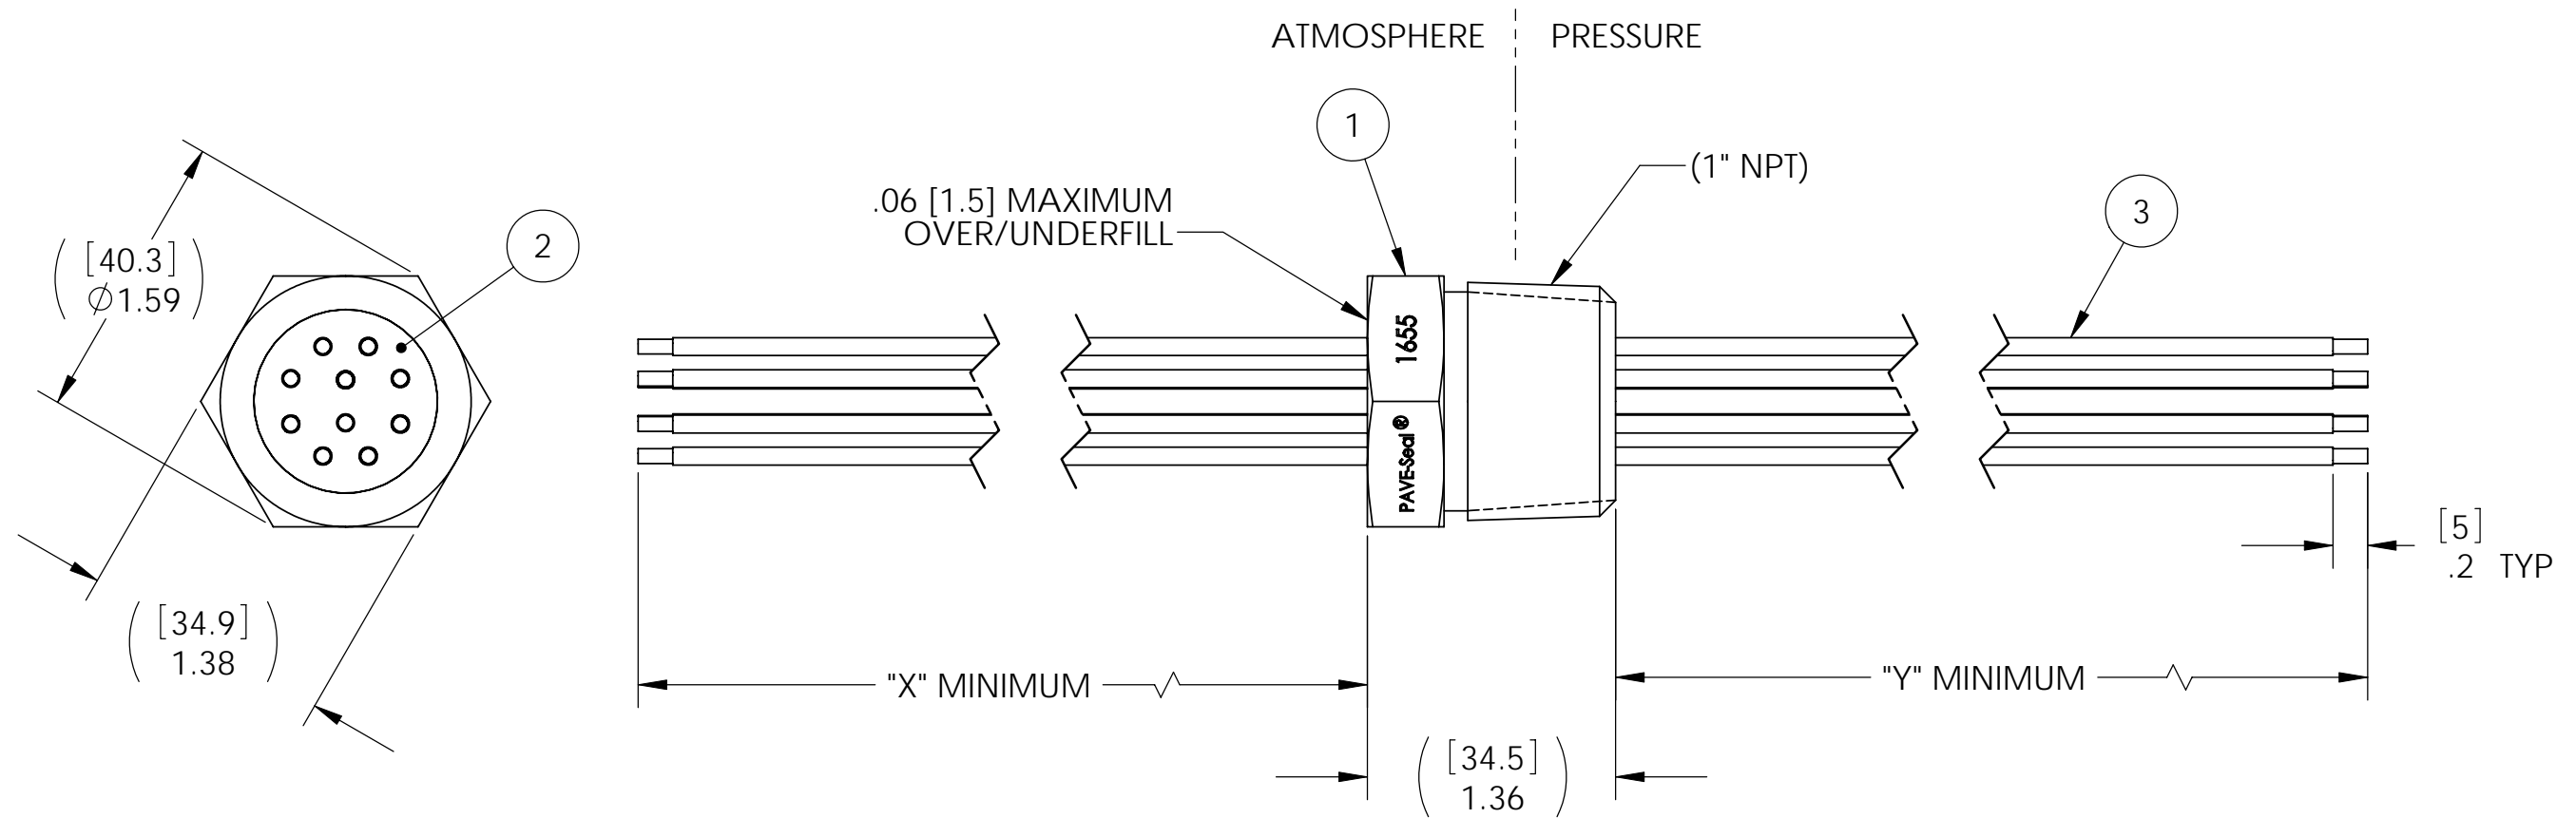

NOTES:

1. LEAK TEST: 80 PSI, NO BUBBLES "Z" MINUTES MINIMUM.
2. HYPOT 630 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE AND HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. WIRE POSITIONING IS APPROXIMATE & VARIABLE.
6. COSMETIC SURFACE VOIDS SMALLER THAN  $\phi 0.035$  [0.89] ARE ACCEPTABLE.
7. DIMENSIONS ARE INCHES [millimeters].
8. REF-OPERATING TEMPERATURE -20 °C TO 125 °C.
9. PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.

3	10	TZ12 WHT	WIRE TZ12 MIL-W-22759/32-12-9 37/28
2	A/R	PAVE-Seal 150	EPOXY BLACK
1	1	1625	HOUSING PT16-SS
ITEM	QTY	PART NUMBER	DESCRIPTION

**PAVE technology co.**  
 2751 Thunderhawk Court  
 Dayton, OH 45414-3445  
 U.S.A.  
 tel (937) 890-1100  
 fax (937) 8905165  
 www.pavetechnologyco.com

DESCRIPTION *SEE TABLE	
PART NUMBER <b>1655</b>	MATERIAL NOTED REVISION LEVEL B
PROJECTION ⊙ ◁	

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.  
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5  
 X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005  
 ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS