


LEAK TEST PORT
REFERENCE ONLY

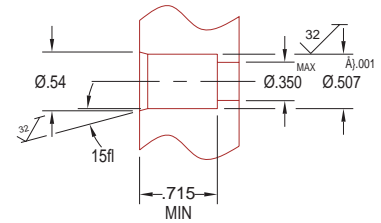

NOTES:

1. LEAK TEST: 30 PSI, NO BUBBLES, 2 MINUTES MIN.
2. HYPOT 630 VDC 500 MEGOHMS .01 SEC MINIMUM, WIRE TO WIRE.

4	7@1.7	TE22	WIRE, TEFLON, 22AWG, 7 STR (ANY COLOR)
3	A/R	SUPER-O-LUBE	LUBRICANT, O-RING
2	1	-012 VITON 75A	O-RING
1	1	SP8M	HOUSING, SP8M, EPOXY
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/- .5
 .X DECIMAL +/- .1 .XX DECIMAL +/- .02 .XXX DECIMAL +/- .005
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS



DESCRIPTION
 SP8M-E-80-7-TE22-10-10

PART NUMBER

1705

PROJECTION

