


LEAK TEST PORT
REFERENCE ONLY

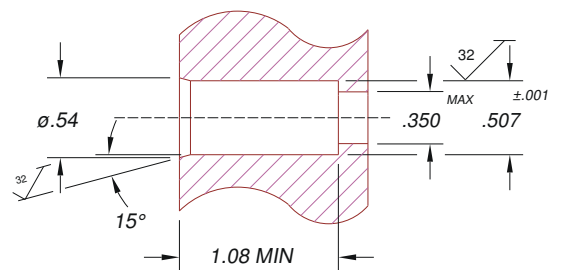

- NOTES:
1. LEAK TEST: 80 PSI, NO BUBBLES 1 MINUTES MIN.
 2. HYPOT 630 VDC 500 MEGOHMS .01 SEC MINIMUM, WIRE TO WIRE.

		2751 Thunderhawk Court Dayton, Ohio 45414-3445 U.S.A. (937)890-1100 fax (937)890-5165 www.pave technologyco.com
TITLE OR PAVE ORDER CODE SP8L-E-80-2-PC18-10-9		
PART NUMBER 1738	PROJECTION 	