


| PAVE# | "X" | "Y" | "Z" |
|--------|----------|------------|-----|
| 1755 | 36 [914] | 240 [6096] | 12 |
| 1755-1 | 24 [610] | 24 [610] | 2 |

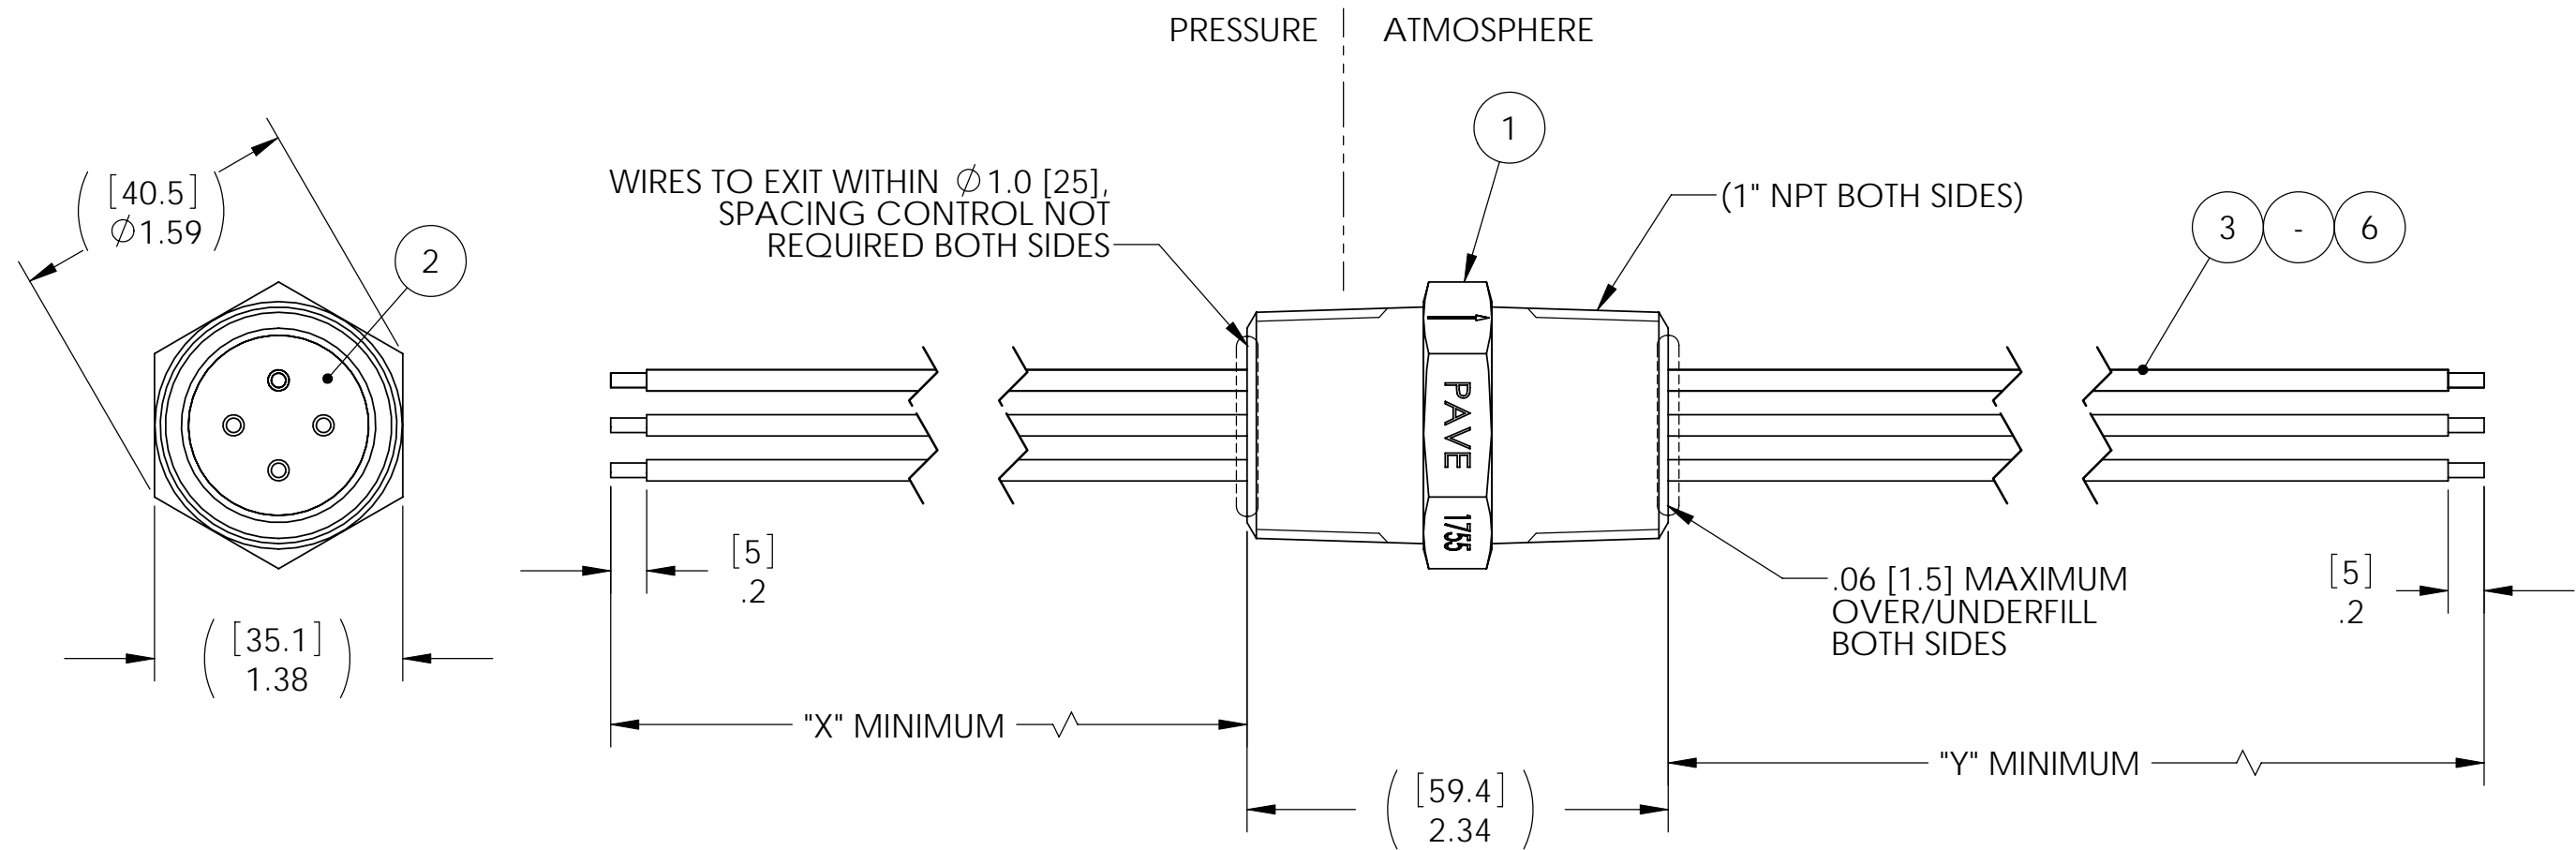

NOTES:

1. LEAK TEST 80 PSI, NO BUBBLES "Z" MINUTES MINIMUM.
2. HYPOT 630 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE AND HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. WIRE POSITIONING IS APPROXIMATE & VARIABLE.
6. VOIDS LARGER THAN $\phi .035$ [.89] ARE NOT ACCEPTABLE.
7. REF-OPERATING TEMPERATURE -20 °C TO 155 °C.
8. DIMENSIONS ARE INCHES [millimeters].
9. PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.

| 6 | 1 | EE12 WHITE | WIRE 12EE MIL-W-16878/5 .017 19/#25 |
|------|-----|-----------------|-------------------------------------|
| 5 | 1 | EE12 19STR RED | WIRE 12EE MIL-W-16878/5 .017 19/#25 |
| 4 | 1 | EE12 19STR BLUE | WIRE 12EE MIL-W-16878/5 .017 19/#25 |
| 3 | 1 | EE12 BLACK | WIRE 12EE MIL-W-16878/5 .017 19/#25 |
| 2 | A/R | PAVE-Seal 200 | EPOXY BLACK |
| 1 | 1 | 1132 | HOUSING PTN16-SS |
| ITEM | QTY | PART NUMBER | DESCRIPTION |

PAVE technology co.
 2751 Thunderhawk Court
 Dayton, OH 45414-3445
 U.S.A.
 tel (937) 890-1100
 fax (937) 8905165
 www.pavetechnologyco.com

| | |
|---|---------------------------------------|
| DESCRIPTION PTN16-SS-200-4-TEE12-X-Y | |
| PART NUMBER 1755* | MATERIAL NOTED REVISION LEVEL A |
| PROJECTION ⊙ ◻ | |

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5
 X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005
 ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS