


PRESSURE ATMOSPHERE

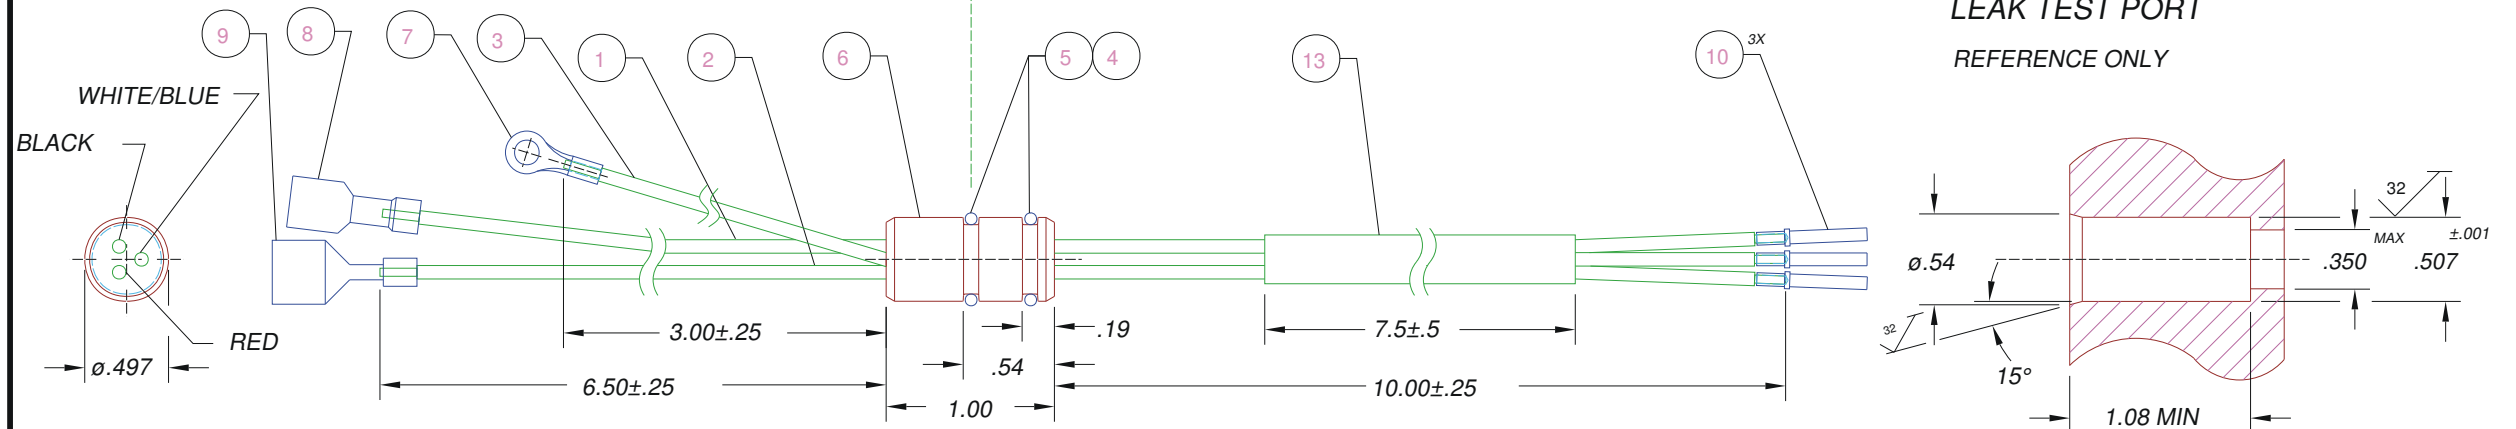

13	1@7.5"	PVC-105-1/4"	TUBING .250 X .020 PVC
12	1	WM-3S	WEDGE LOCK FOR 3 SOCKET RCPT DEUTSCH
11	1	DTM06-3S-E004	RCPT 3 #20 SOCKETS BLACK DEUTSCH
10	3	1062-20-0122	TERMINAL #20 SOCKET STRIP FORM DEUTSCH
9	1	AA-2201	TERMINAL ETC/MOLEX
8	1	AA-2203	TERMINAL ETC/MOLEX
7	1	AA-132-06	TERMINAL ETC/MOLEX
6	1	1226-L REV B	HOUSING SP8L-E
5	2	-012 VITON	O-RING -012 VITON 75
4	A/R	PARKER O-LUBE	LUBRICANT O-RING BARIUM
3	1@14"	PC18 UL1569W/BL	WIRE 18PC UL1569 .016 7/#26
2	1@17.5"	PC18 UL1569 RED	WIRE 18PC UL1569 .016 7/#26
1	1@17.5"	PC18 UL1569 BLK	WIRE 18PC UL1569 .016 7/#26
ITEM	QTY	PART#	DESCRIPTION

NOTES:

1. LEAK TEST: 80 PSI, NO BUBBLES 1 MINUTES MIN.
2. HYPOT 630 VDC 500 MEGOHMS .01 SEC MINIMUM, WIRE TO WIRE.
3. WIRES SHALL BE FLEXIBLE EXITING FROM ITEM 6.



TITLE OR PAVE ORDER CODE
SP8L-E-150-3-PC18-10-7

PART NUMBER
1796

