


INSTALL PART
AND SECURE
USING WALDES
TRUARC P/N
5304-31
KLIPRING
RETAINING RING

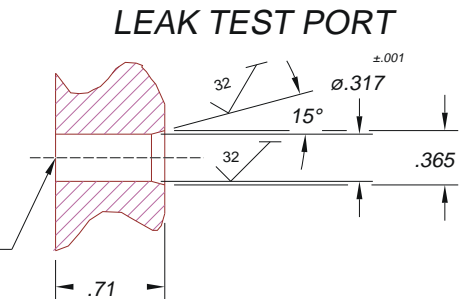

NOTES:

1. LEAK TEST: 80 PSI, NO BUBBLES 1 MINUTES MINIMUM.
2. HYPOT 630 VDC 500 M .01 S&C MINIMUM, WIRE TO LEAK TEST PORT.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL SPECIFICATIONS AND TESTS SUPERSEDE PAVE CATALOG SPECIFICATIONS.

4	A/R	PARKER O-LUBE	LUBRICANT O-RING BARIUM
3	1	-009 VITON	O-RING -009 VITON 75
2	25"	EE18 FEP YELLOW	WIRE 7STRD. FEP 18GA YLW
1	A/R	PAVE-Seal 150	EPOXY BLACK
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/- .5
 .X DECIMAL +/- .1 .XX DECIMAL +/- .02 .XXX DECIMAL +/- .005
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS



DESCRIPTION PAVE-Seal® Cable Harnesses
 SPF5L-E-150-1-TEE18-12-12

PART NUMBER
1836

