


- NOTES:
1. LEAK TEST: 1000 PSI, NO BUBBLES 30 SEC MINIMUM.
 2. HYPOT 630 VDC 500 MEGOHMS .01 SEC MINIMUM, WIRE TO WIRE.
 3. WIRE POSITIONS ARE APPROXIMATE, & COLOR POSITIONS MAY VARY.

11	1	1226A	HOUSING SP8A-E
10	A/R	PARKER O-LUBE	LUBRICANT O-RING BARIUM
9	2	-012 BUNA	O-RING -012 BUNA 75
8	1@13	E24 BROWN	WIRE 24E MIL-W-16878/4 .010 7/#32
7	1@13	E24 ORANGE	WIRE 24E MIL-W-16878/4 .010 7/#32
6	1@13	E24 PURPLE	WIRE 24E MIL-W-16878/4 .010 7/#32
5	1@13	E24 GREEN	WIRE 24E MIL-W-16878/4 .010 7/#32
4	1@13	E24 GRAY	WIRE 24E MIL-W-16878/4 .010 7/#32
3	1@13	E24 BLACK	WIRE 24E MIL-W-16878/4 .010 7/#32
2	1@13	E24 BLUE	WIRE 24E MIL-W-16878/4 .010 7/#32
1	1@13	E24 YELLOW	WIRE 24E MIL-W-16878/4 .010 7/#32
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/- .5
 .X DECIMAL +/- .1 .XX DECIMAL +/- .02 .XXX DECIMAL +/- .005
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS

LEAK TEST PORT
 REFERENCE ONLY

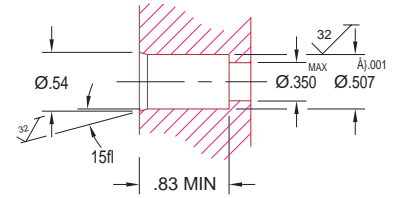

PAVE technology co. 2751 Thunderhawk Court
 Dayton, Ohio 45414-3445
 U.S.A.
 (937)890-1100
 fax (937)890-5165
 www.pavetechnologyco.com

DESCRIPTION
SP8A-E-150-8-TE24-6-6

PART NUMBER
1854

PROJECTION