


**LEAK TEST PORT DIMS**  
SCALE 1=2  
SEE NOTE 5

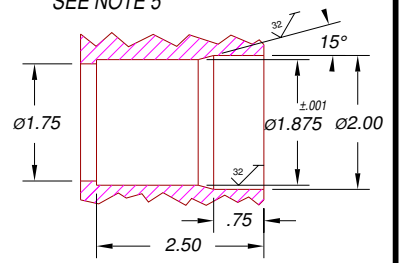

- NOTES:**
1. LEAK TEST: 80 PSI, NO BUBBLES 2 MINUTES MIN.
  2. HYPOT 630 VDC 500 MEGOHMS .01 SEC MINIMUM, WIRE TO WIRE & HOUSING.
  3. ALL TESTS ARE DONE AT ROOM TEMPERATURE.
  4. THESE SPECIFICATIONS SUPERSEDE PAVE CATALOG.
  5. BASIC PORT DIMENSIONS SHOWN, USED FOR TEST PER NOTE 1.

22	A/R	PAVESEAL 80	EPOXY BLACK
21	1	0324	HOUSING SP26-E
20	A/R	SUPER-O-LUBE	LUBRICANT O-RING BARIUM BASED
19	1	-325 BUTYL	O-RING -325 BUTYL 70 DURO
18	1	1936	INSERT THREAD M16x1.0
17	18.3'	PC16 UL1007 WHT	WIRE 16PVC UL1007/1569 .016 26/#30 WHITE
16	18.3'	PC16 UL1007 ORG	WIRE 16PVC UL1007/1569 .016 26/#30 ORANGE
15	18.3'	PC16 UL1007 GRY	WIRE 16PVC UL1007/1569 .016 26/#30 GRAY
14	18.3'	PC16 UL1007 GRN	WIRE 16PVC UL1007/1569 .016 26/#30 GREEN
13	18.3'	PC16 UL1007 BRN	WIRE 16PVC UL1007/1569 .016 26/#30 BROWN
12	18.3'	PC16 UL1007 BLK	WIRE 16PVC UL1007/1569 .016 26/#30 BLACK
11	18.3'	PC22 UL1569 WHT	WIRE 22PVC UL1569 .016 7/#30 WHITE
10	18.3'	PC22 UL1569 PUR	WIRE 22PVC UL1569 .016 7/#30 PURPLE
9	18.3'	PC22 UL1569 YEL	WIRE 22PVC UL1569 .016 7/#30 YELLOW
8	18.3'	PC22 UL1569 RED	WIRE 22PVC UL1569 .016 7/#30 RED
7	18.3'	PC22 UL1569 ORG	WIRE 22PVC UL1569 .016 7/#30 ORANGE
6	18.3'	PC22 UL1569 GRY	WIRE 22PVC UL1569 .016 7/#30 GRAY
5	18.3'	PC22 UL1569 GRN	WIRE 22PVC UL1569 .016 7/#30 GREEN
4	18.3'	PC22 UL1569 BRN	WIRE 22PVC UL1569 .016 7/#30 BROWN
3	18.3'	PC22 UL1569 BLU	WIRE 22PVC UL1569 .016 7/#30 BLUE
2	18.3'	PC22 UL1569 BLK	WIRE 22PVC UL1569 .016 7/#30 BLACK
1	18.3'	1588A BELDEN	CABLE PVC JACKETED 2TP POLYOLEFIN #24AWG SOLID
ITEM	QTY	PART# (SOURCE)	DESCRIPTION

**PAVE technology** 2751 Thunderhawk Court  
Dayton, Ohio 45414-3445  
U.S.A.  
(937)890-1100  
fax (937)890-5165  
www.pavetechnologyco.com

TITLE OR PAVE ORDER CODE  
**SP26-E-80-1/10/6-RJ45/PC22/16-192-24**

PART NUMBER  
**1965**

PROJECTION