


ATMOSPHERE PRESSURE

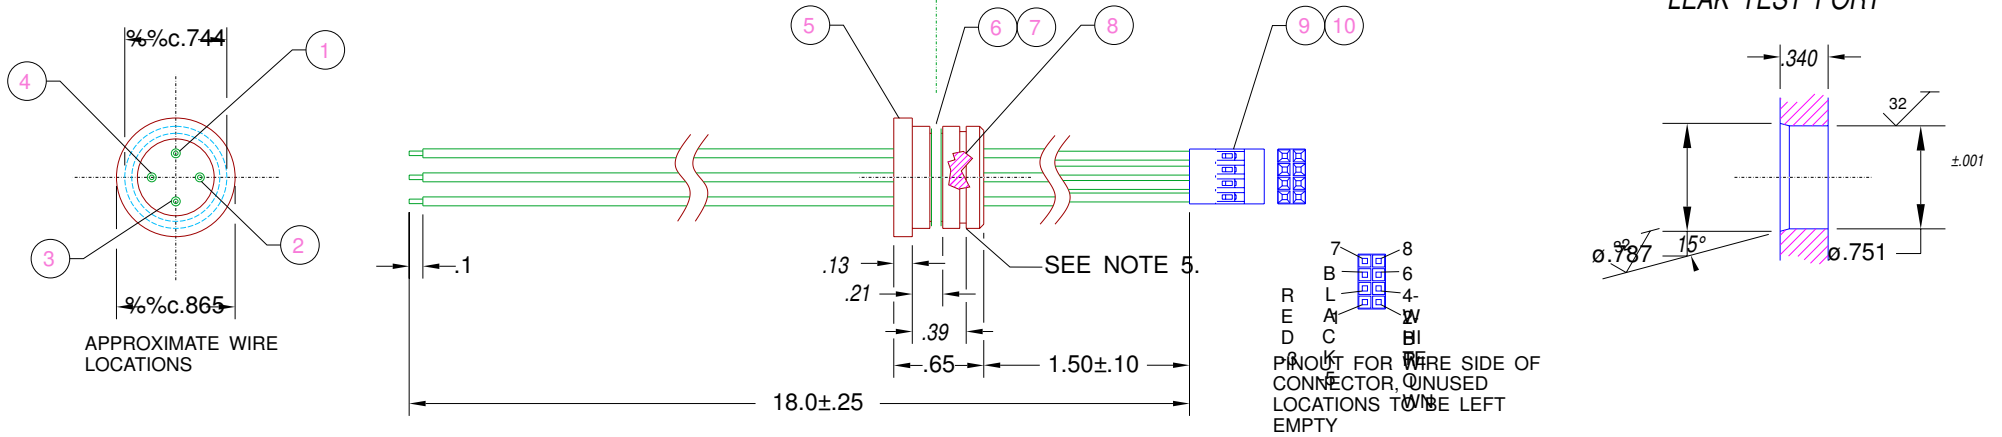

- NOTES:  
 1. LEAK TEST: 80 PSI, NO BUBBLES 2 MINUTES MIN.  
 2. HYPOT 100 VDC 500 MEGOHMS .01 SEC MINIMUM, WIRE TO WIRE W/MATING HEADER.  
 3. ALL TESTS ARE DONE AT ROOM TEMPERATURE.  
 4. THESE SPECIFICATIONS SUPERSEDE PAVE CATALOG.  
 5. REF-CAN USE A TRUARC 5100-75 OR EQUAL RETAINING RING IN GROOVE.

10	4	48251-000	SOCKET CRIMP #22 BERG
9	1	65043-033	RCPT MINI LATCH BERG 4x2
8	A/R	PAVESEAL 80	EPOXY BLACK
7	A/R	PARKER O-LUBE	LUBRICANT O-RING BARIUM
6	1	-016 BUNA	O-RING -016 BUNA 75
5	1	0130	HOUSING SPF12-E
4	1@19"	PC22 UL1569 BLK	WIRE 22PVC UL1569 .016 7/#30 BLACK
3	1@19"	PC22 UL1569 RED	WIRE 22PVC UL1569 .016 7/#30 RED
2	1@19"	PC22 UL1569 BRN	WIRE 22PVC UL1569 .016 7/#30 BROWN
1	1@19"	PC22 UL1569 WHT	WIRE 22PVC UL1569 .016 7/#30 WHITE
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES  
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/- .5  
 .X DECIMAL +/- .1 .XX DECIMAL +/- .02 .XXX DECIMAL +/- .005  
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS



DESCRIPTION	
SPF12-E-80-4-PC22-16-1.5T	
PART NUMBER	PROJECTION
2098	