


METRIC DRAWING

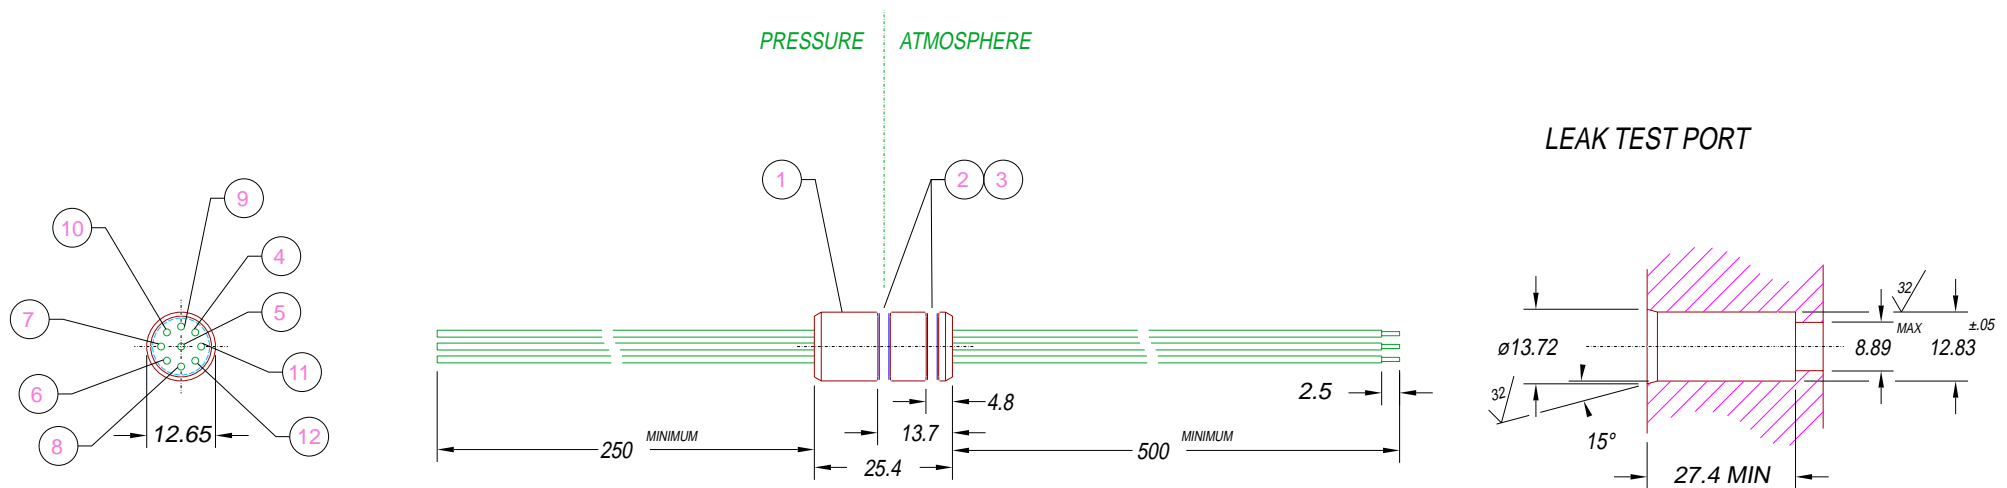

NOTES:

1. LEAK TEST: 80 PSI, NO BUBBLES 1.5 MINUTES MINIMUM.
QUALIFICATION ONLY: 750 PSI, NO BUBBLES.
2. HYPOT 630 VDC 500 MW .01 SEC MINIMUM, WIRE TO WIRE.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.

12	776mm	FEP #24 WHITE	WIRE 24FEP TIN PLATED
11	776mm	FEP #24 GRAY	WIRE 24FEP TIN PLATED
10	776mm	FEP #24 VIOLET	WIRE 24FEP TIN PLATED
9	776mm	FEP #24 BLUE	WIRE 24FEP TIN PLATED
8	776mm	FEP #24 GREEN	WIRE 24FEP TIN PLATED
7	776mm	FEP #24 YELLOW	WIRE 24FEP TIN PLATED
6	776mm	FEP #24 ORANGE	WIRE 24FEP TIN PLATED
5	776mm	FEP #24 RED	WIRE 24FEP TIN PLATED
4	776mm	FEP #24 BLACK	WIRE 24FEP TIN PLATED
3	2	-012 BUNA	O-RING -012 BUNA 70
2	A/R	PARKER O-LUBE	LUBRICANT O-RING BARIUM-BASED
1	1	1226-L	HOUSING SP8L-E
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN MM
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/- .13
 .X DECIMAL +/- 2.5 .XX DECIMAL +/- .50 .XXX DECIMAL +/- .100
 ANGLES +/- 1 DEG SURFACE FINISH 3.2 micrometers RMS



DESCRIPTION **PAVE-Seal® Cable Harnesses**
SP8L-E-150-9-TK24-25-50cm

PART NUMBER

2170

PROJECTION

