


NOTES:

1. LEAK TEST: 80 PSI, NO BUBBLES 30 SECONDS MINIMUM.
2. HYPOT 630 VDC 500 MΩ .01 SEC MINIMUM, WIRE TO WIRE & HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. OPERATING TEMPERATURE RANGE: -20 TO 125°C.

6	1	ET28 BLACK	WIRE 28ET MIL-W-16878/6 .006 7/#36
5	1	ET28 RED	WIRE 28ET MIL-W-16878/6 .006 7/#36
4	1	ET28 WHITE	WIRE 28ET MIL-W-16878/6 .006 7/#36
3	A/R	PARKER O-LUBE	LUBRICANT O-RING BARIUM BASED
2	1	.139X.039 VITON	O-RING .139X.039 VITON 75
1	A/R	PAVE-SEAL 150	EPOXY BLACK
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-0.5
 .X DECIMAL +/- 0.1 .XX DECIMAL +/- 0.02 .XXX DECIMAL +/-0.005
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS

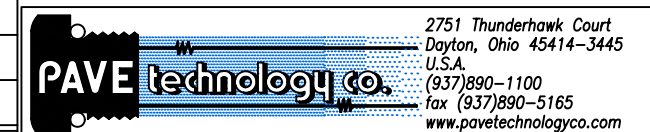

DESCRIPTION PAVE-Seal@ Cable Harnesses
 SP2-E-150-3-ET28-4-4

PART NUMBER
 2190

REVISION LEVEL
 A

