


# METRIC DRAWING

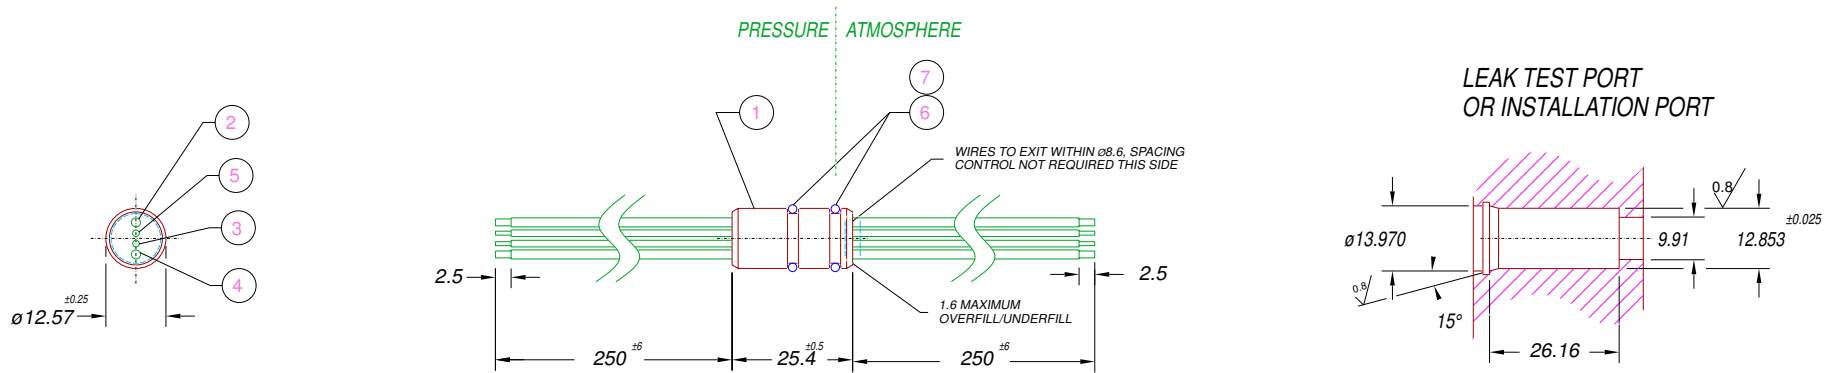

## NOTES:

1. LEAK TEST: 80 PSI, NO BUBBLES 1 MINUTE MIN.
2. HYPOT 630 VDC 500 MEGOHMS 0.01 SEC MINIMUM, WIRE TO WIRE
3. ALL TESTS ARE DONE AT ROOM TEMPERATURE.
4. PERCENTAGE OF PARTS TESTED WILL BE 100% (MAY BE A LESSER PERCENTAGE FOR LARGE PRODUCTION QUANTITIES, UNLESS OTHERWISE NOTED OR REQUIRED).
5. WIRE COLOR LOCATIONS MAY VARY FROM THAT SHOWN..
6. REF- TRUARC RETAINING RING N5000-56
7. NO VOIDS LARGER THAN  $\phi 0.89$  ARE ACCEPTABLE.

7	A/R	SUPER-O-LUBE	LUBRICANT O-RING SILICONE BASED
6	2	-012 VITON	O-RING -012 VITON 75
5	1.75'	E22 WHITE	WIRE 22E MIL-W-16878/4 7/#26
4	1.75'	E22 BLUE	WIRE 22E MIL-W-16878/4 7/#26
3	1.75'	E18 BLACK	WIRE 18E MIL-W-16878/4 19/#30
2	1.75'	E18 RED	WIRE 18E MIL-W-16878/4 7/#26
1	1	1226	HOUSING SP8L-E
ITEM	QTY	ITEM ID	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES  
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-0.5  
 .X DECIMAL +/- 0.1 .XX DECIMAL +/- 0.02 .XXX DECIMAL +/-0.005  
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS

2751 Thunderhawk Court  
Dayton, Ohio 45414-3445  
U.S.A.  
(937)890-1100  
fax (937)890-5165  
www.pave-technology.com

DESCRIPTION  
**SP8L-E-150-2/2-TE18/22-250-250MM**

PART NUMBER <b>2229</b>	REVISION LEVEL <b>C</b>
PROJECTION	