


METRIC

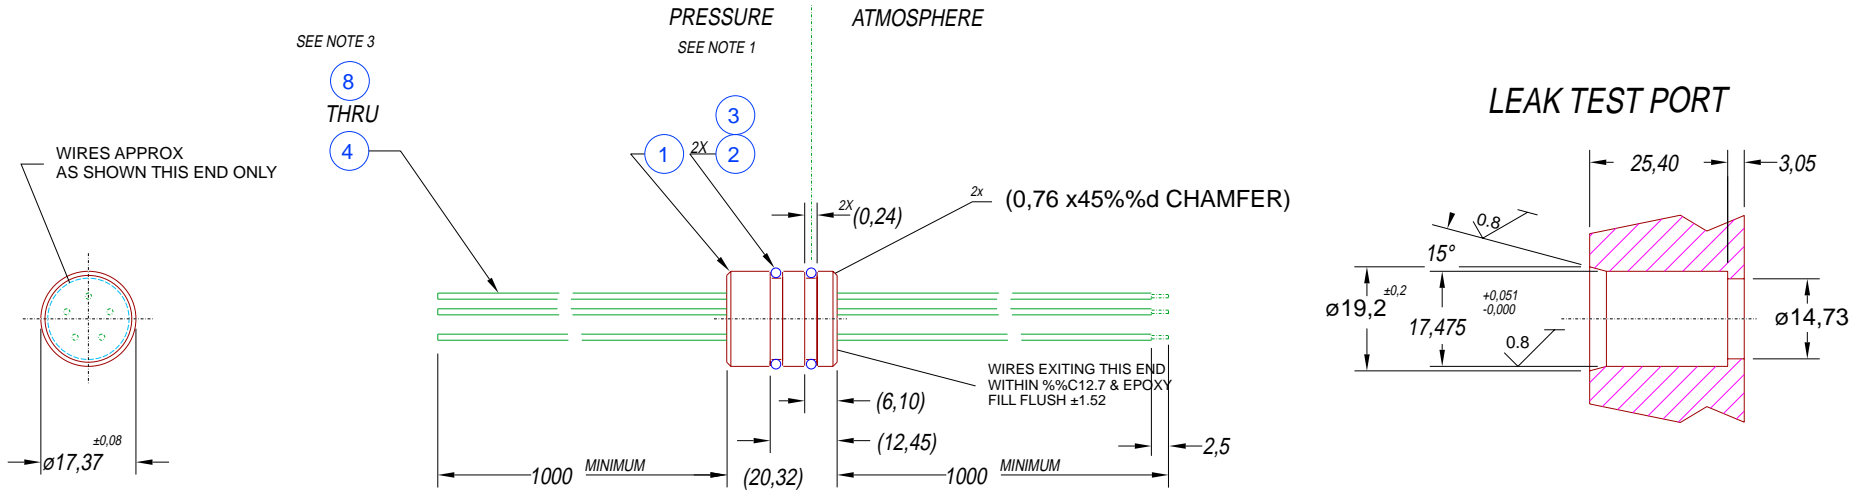

- NOTES:
1. LEAK TEST: 4785 PSI, NO BUBBLES 3.5 MINUTES MINIMUM.
  2. HYPOT 630 VDC 500 MW 0.01 SEC MINIMUM, WIRE TO WIRE.
  3. WIRE COLORS & POSITIONS MAY VARY.
  4. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.

8	1@6.63'	E24 BLUE	WIRE 24E MIL-W-16878/4 .005 7/#34
7	1@6.63'	E24 GRAY	WIRE 24E MIL-W-16878/4 .005 7/#34
6	1@6.63'	E24 ORANGE	WIRE 24E MIL-W-16878/4 .005 7/#34
5	1@6.63'	E24 RED	WIRE 24E MIL-W-16878/4 .005 7/#34
4	1@6.63'	E24 WHITE	WIRE 24E MIL-W-16878/4 .005 7/#34
3	A/R	PARKER O-LUBE	LUBRICANT O-RING BARIUM BASED
2	2	-015 VITON	O-RING -015 VITON 75
1	1	1374 SP11M	HOUSING SP11M-E
ITEM	QTY	PART NUMBER	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN MM  
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-13  
 .X DECIMAL +/- 2.5 .XX DECIMAL +/- .50 .XXX DECIMAL +/- .100  
 ANGLES +/- 1 DEG SURFACE FINISH 3.2 micrometers RMS

**PAVE technology** co.

2751 Thunderhawk Court  
 Dayton, Ohio 45414-3445  
 U.S.A.  
 (937)890-1100  
 fax (937)890-5165  
 www.pavetechnologyco.com

DESCRIPTION **PAVE-Seal® Cable Harnesses**  
**SP11M-E-80-5-TE24-1M-1M**

PART NUMBER **2350**

PROJECTION