


# METRIC DRAWING

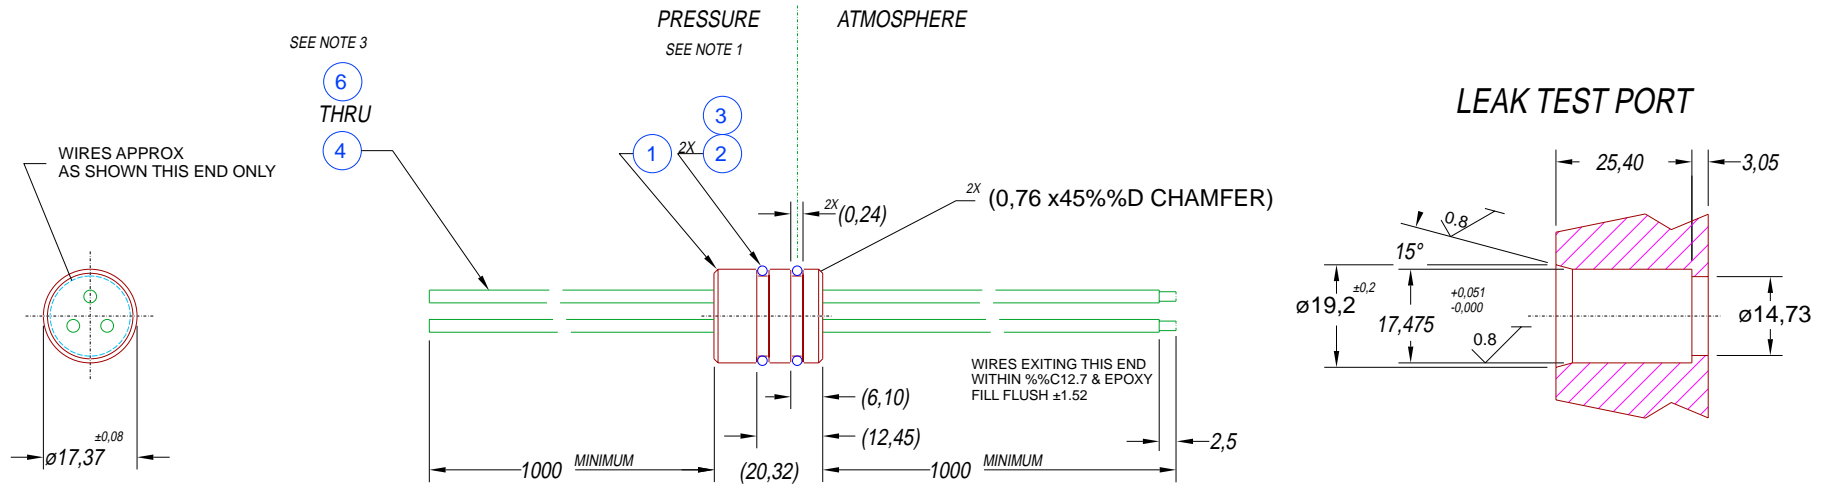

- NOTES:
1. LEAK TEST: 4785 PSI, NO BUBBLES 3.5 MINUTES MINIMUM.
  2. HYPOT 480 VAC 1mA MAXIMUM LEAKAGE, WIRE TO WIRE.
  3. WIRE COLORS & POSITIONS MAY VARY.
  4. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.

6	1@6.63'	E14 BLACK	WIRE 14E MIL-W-16878/4 0.012 19
5	1@6.63'	E14 RED	WIRE 14E MIL-W-16878/4 0.012 19
4	1@6.63'	E14 WHITE	WIRE 14E MIL-W-16878/4 0.012 19
3	A/R	PARKER O-LUBE	LUBRICANT O-RING BARIUM BASED
2	2	-015 VITON	O-RING -015 VITON 75
1	1	1374 SP11M	HOUSING SP11M-E
ITEM	QTY	PART NUMBER	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN MM  
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-13  
 .X DECIMAL +/- 2.5 .XX DECIMAL +/- .50 .XXX DECIMAL +/-100  
 ANGLES +/- 1 DEG SURFACE FINISH 3.2 micrometers RMS



DESCRIPTION PAVE-Seal® Cable Harnesses  
**SP11M-E-80-3-TE14-1M-1M**

PART NUMBER  
**2351**

