


VS8 INSTALLATION PORT

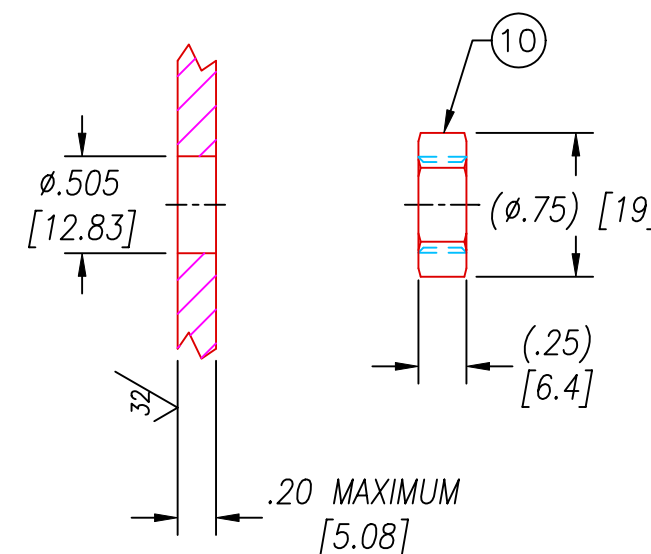

WIRE LENGTH CHART		
PART#	A	B
2357	12 [305]	12 [305]
2357-1	15.75 [400]	3.94 [100]
2357-2	60 [1524]	12 [305]

NOTES:

1. HE LEAK TEST @1 ATM. 10×10^{-9} CC/S OR LESS.
2. HYPOT 630 VDC 500 MΩ 0.01 SEC MINIMUM, WIRE TO WIRE & HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. WIRES ARE NOT REQUIRED TO BEND SHARPLY AT EPOXY SEAL SURFACE.
6. WIRE POSITIONS & COLOR ARRANGMENTS ARE APPROXIMATE & VARIABLE.
7. NO VOIDS LARGER THAN $\phi.035$ [.89] ARE ACCEPTABLE.
8. REF-OPERATING TEMPERATURE RANGE -20°C TO 125°C .
9. DIMENSIONS ARE INCHES [millimeters].

10	1	0894	NUT VS8-SS
9	1	-112 VITON	O-RING -112 VITON 75A
8	1	E24 PURPLE	WIRE 24E MIL-W-16878/4 .010 7/#32
7	1	E24 WHITE	WIRE 24E MIL-W-16878/4 .010 7/#32
6	1	E24 ORANGE	WIRE 24E MIL-W-16878/4 .010 7/#32
5	1	E24 BLACK	WIRE 24E MIL-W-16878/4 .010 7/#32
4	1	E24 GREEN	WIRE 24E MIL-W-16878/4 .010 7/#32
3	1	E24 GRAY	WIRE 24E MIL-W-16878/4 .010 7/#32
2	A/R	PAVE-Seal 150	EPOXY BLACK
1	1	0892	HOUSING VS8-SS
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-0.5
 .X DECIMAL +/- 0.1 .XX DECIMAL +/- 0.02 .XXX DECIMAL +/-0.005
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS

PAVE technology co.
 2751 Thunderhawk Court
 Dayton, Ohio 45414-3445
 U.S.A.
 (937)890-1100
 fax (937)890-5165
 www.pavetechnologyco.com

DESCRIPTION PAVE-Seal@ Cable Harnesses
 VS8-SS-150-6-TE24-A-B

PART NUMBER
 2357

REVISION LEVEL
 D
 PROJECTION