


INSTALLATION PORT

RECOMMEND TRUARC N5000-56

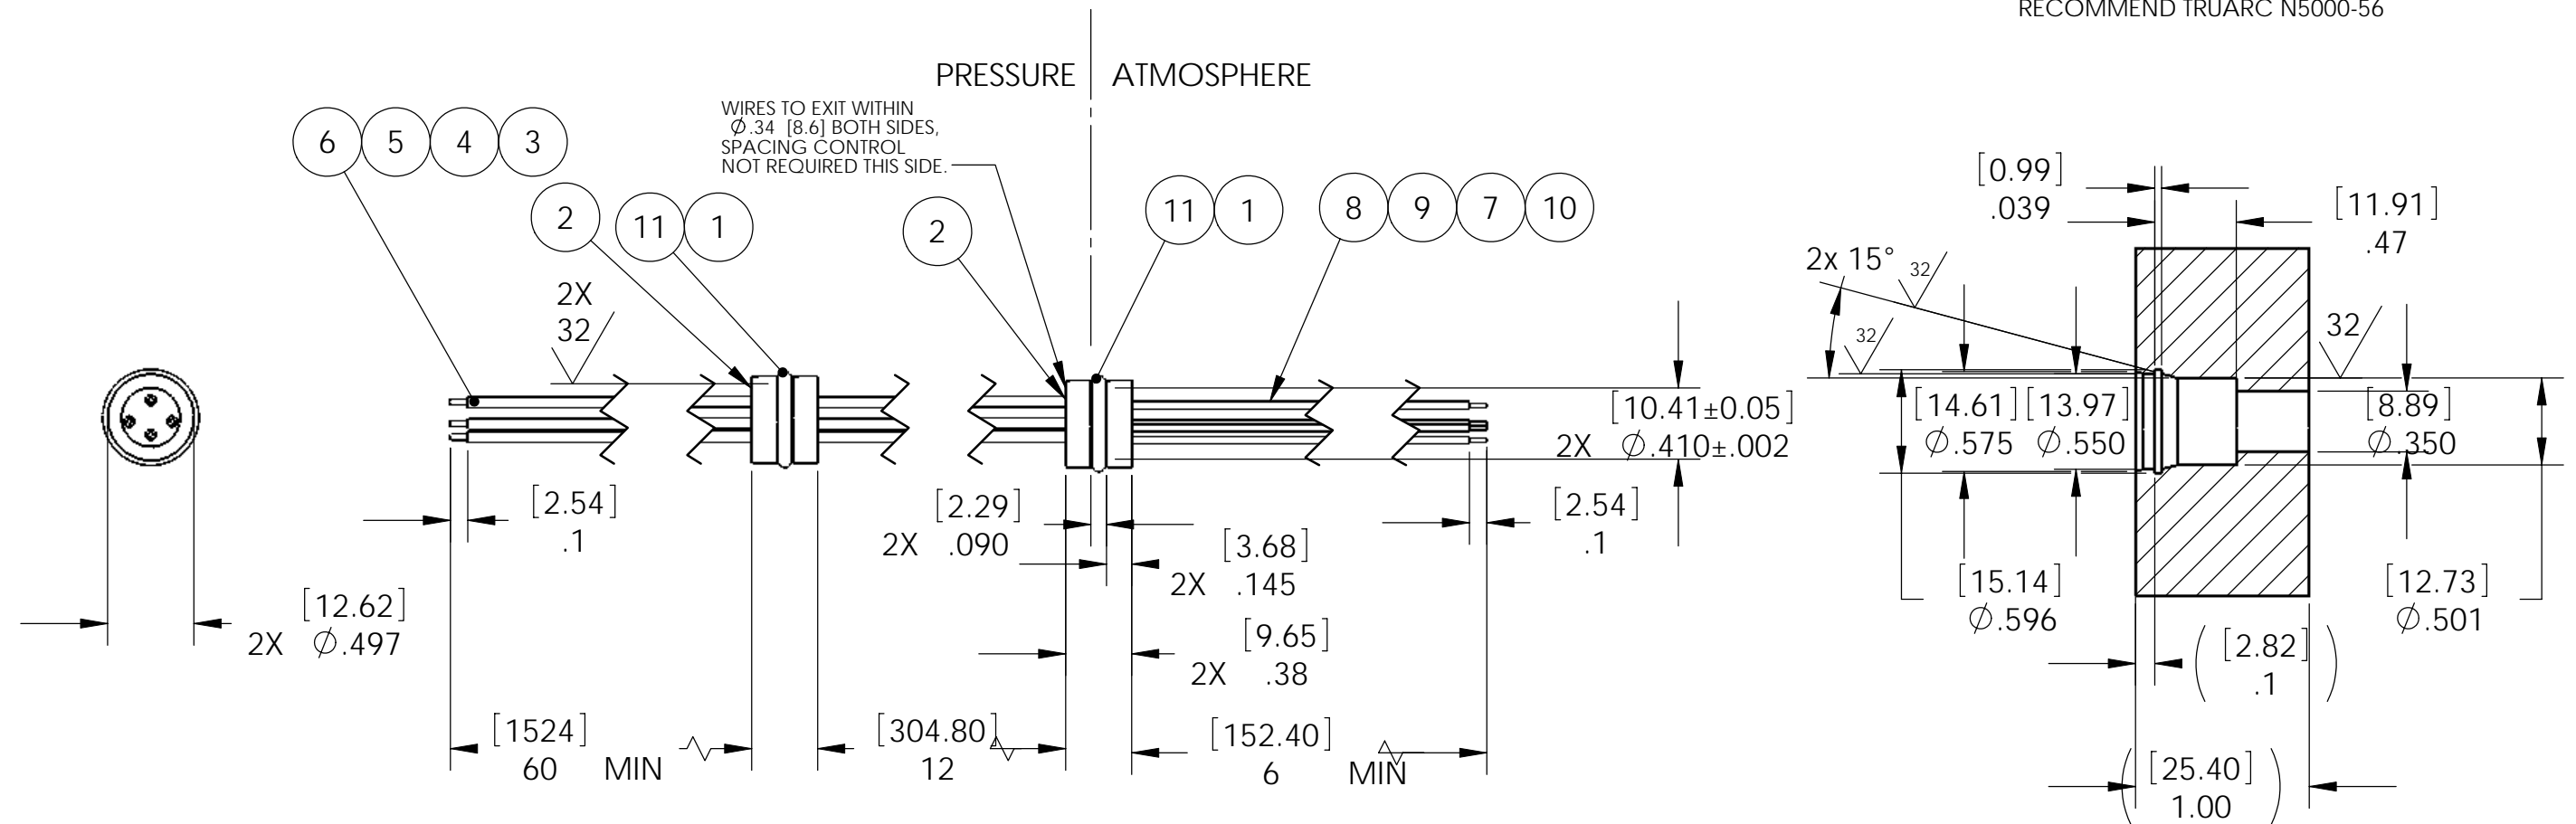

NOTES:

1. LEAK TEST: 300 BAR, NO BUBBLES 2 SECONDS MINIMUM.
2. HYPOT 630 VDC 500 MEGAOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. WIRE COLOR POSITIONS ARE APPROXIMATE AND VARIABLE.
6. NO VOIDS LARGER THAN $\phi 0.035$ ARE ACCEPTABLE.
7. REF - TEMPERATURE RANGE -30 TO 120 °C.
8. CONTINUITY TEST: <0.3 OHMS EACH WIRE END TO END

11	2	-012 BUNA	O-RING -012 BUNA 75
10	1	TFE26 GREEN	WIRE 26AWG TEFLON M22759/9-22 19 STRAND
9	1	TFE26 RED	WIRE 26AWG TEFLON M22759/9-22 19 STRAND
8	1	TFE26 YELLOW	WIRE 26AWG TEFLON M22759/9-22 19 STRAND
7	1	TFE26 BLUE	WIRE 26AWG TEFLON M22759/9-22 19 STRAND
6	1	TFE22 YELLOW	WIRE 22AWG TEFLON M22759/9-22 19 STRAND
5	1	TFE22 RED	WIRE 22AWG TEFLON M22759/9-22 19 STRAND
4	1	TFE22 GREEN	WIRE 22AWG TEFLON M22759/9-22 19 STRAND
3	1	TFE22 BLUE	WIRE 22AWG TEFLON M22759/9-22 19 STRAND
2	A/R	PAVE-Seal 150	EPOXY BLACK
1	A/R	PARKER O-LUBE	LUBRICANT O-RING BARIUM-BASED
ITEM	QTY	PART NUMBER	DESCRIPTION

PAVE technology co.

2751 Thunderhawk Court
Dayton, OH 45414-3445
U.S.A.
tel (937) 890-1100
fax (937) 8905165
www.pavetechnologyco.com

DESCRIPTION
SP8SR-E-150-4-TE22/26-108-12-6

PART NUMBER
3465

MATERIAL NOTED

REVISION LEVEL
B

PROJECTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ± 0.5
X.X DECIMAL ± 0.1 X.XX DECIMAL ± 0.02 X.XXX DECIMAL ± 0.005
ANGLES ± 1 DEGREE SURFACE FINISH 128 microinch RMS