


NOTES:

1. LEAK TEST: 80 PSI, NO BUBBLES FOR 3.5 MINUTES.
2. HYPOT 630 VDC 500 MΩ 0.01 SEC MINIMUM, WIRE TO WIRE & HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. WIRE POSITIONING IS APPROXIMATE & VARIABLE.
6. WIRES ARE NOT REQUIRED TO BEND SHARPLY AT EPOXY SEAL SURFACE.
7. NO VOIDS LARGER THAN ø.035 [.89] ARE ACCEPTABLE.
8. REF-OPERATING TEMPERATURE RANGE -20°C TO 150°C.
9. DIMENSIONS ARE INCHES [millimeters].

4	A/R	PAVE-Seal 200	EPOXY BLACK HI-TEMP
3	6	EE18 UL1180 WHT	WIRE 18EE UL1180 .014 7/#26
2	3	EE18 UL1180 RED	WIRE 18EE UL1180 .014 7/#26
1	1	3279	HOUSING PTN8-SS
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES  
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-0.5  
 .X DECIMAL +/- 0.1 .XX DECIMAL +/- 0.02 .XXX DECIMAL +/-0.005  
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS

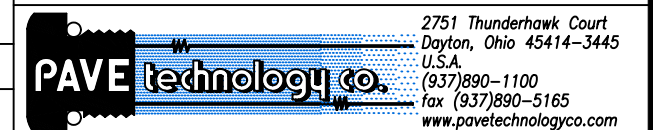

DESCRIPTION PAVE-Seal® Cable Harnesses  
 PTN8-SS-200-9-TEE18-24-48

PART NUMBER

3574

REVISION LEVEL

-

PROJECTION

