




NOTE: O-RING & NUT
OMMITTED FOR CLARITY

ATMOSPHERE
SEE NOTE 1

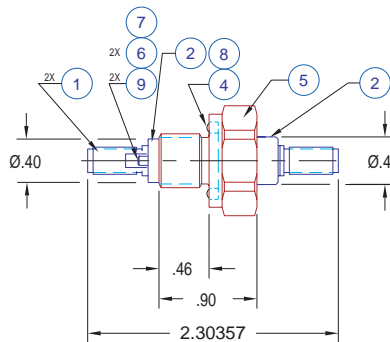

THRUHOLE PORT-REF



NOTES:

1. HELIUM LEAK TEST: <5 X 10-8 cc/s AIR EQ.
2. OPTICAL CONTINUITY-<2.0 dB ATTENUATION @ 850nm SOURCE TO METER.

9	2	AMPHENOL 906-101-3001	ALIGNMENT SLEEVE
8	A/R	SUPER O-LUBE	GREASE, SILICONE (VACUUM)
7	1.4"	100/140 MICRON FIBER	OPTICAL FIBER, MULTIMODE
6	2	AMPHENOL 905-120-5000	144 MICRON FERRULE
5	1	PAVE #0892	VS8-SS HOUSING
4	1	-112 O-RING	-112 FLUOROCARBON O-RING, 75A
3	1	PAVE #0894	VS8-SS NUT
2	A/R	PAVESEAL 150	EPOXY COLLAR
1	2	AMPHENOL 906-122-5000	SMA ADAPTER
ITEM	QTY	PART NUMBER	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/- .5
 .X DECIMAL +/- .1 .XX DECIMAL +/- .02 .XXX DECIMAL +/- .005
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS



DESCRIPTION
VS8-SS-150-1-100/140um-SMA-SMA

PART NUMBER

1514

PROJECTION

