
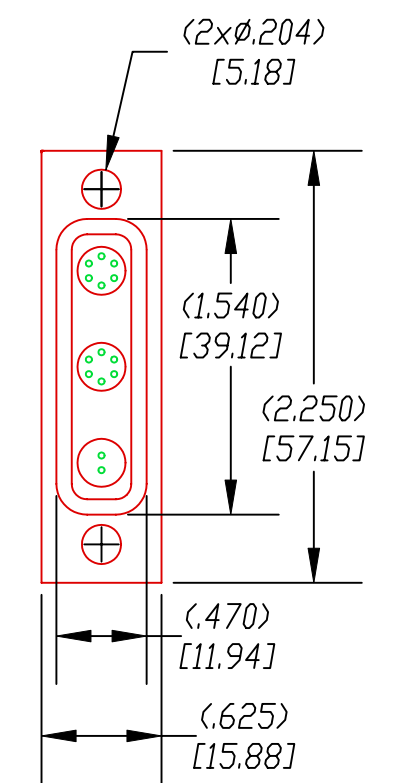
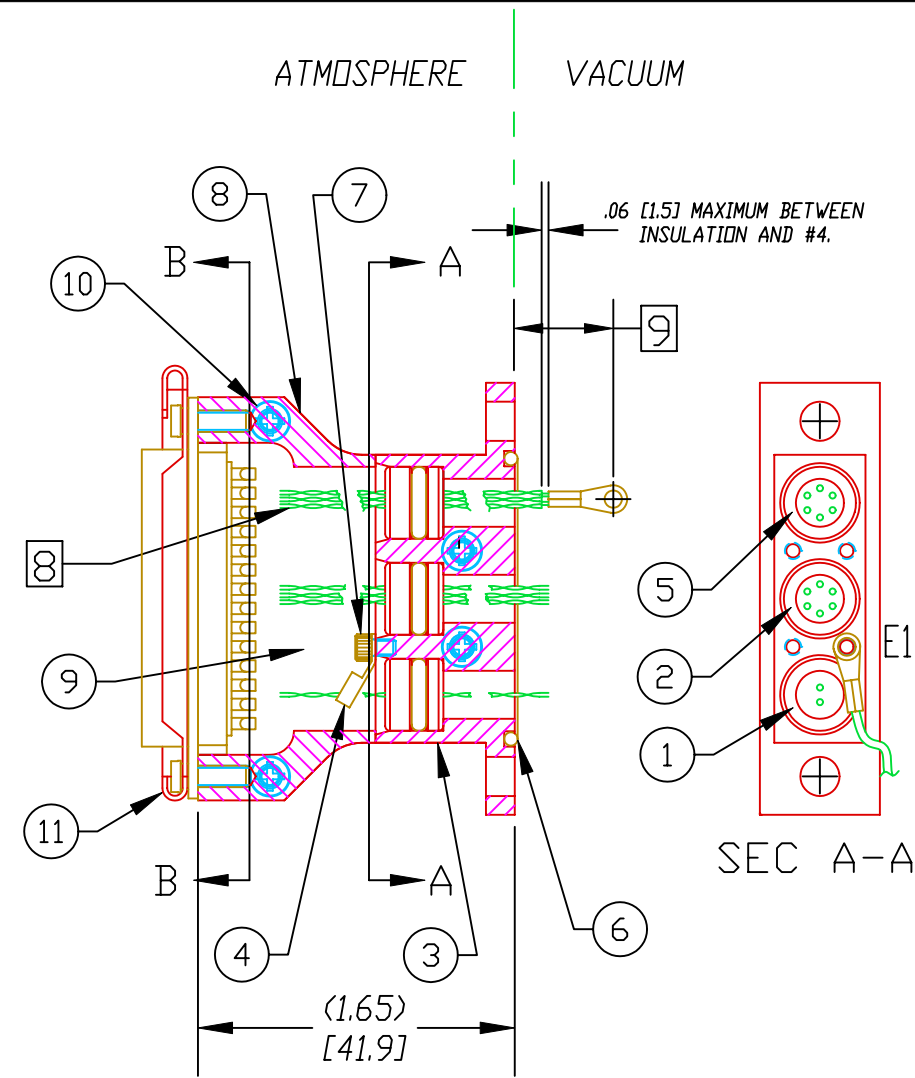
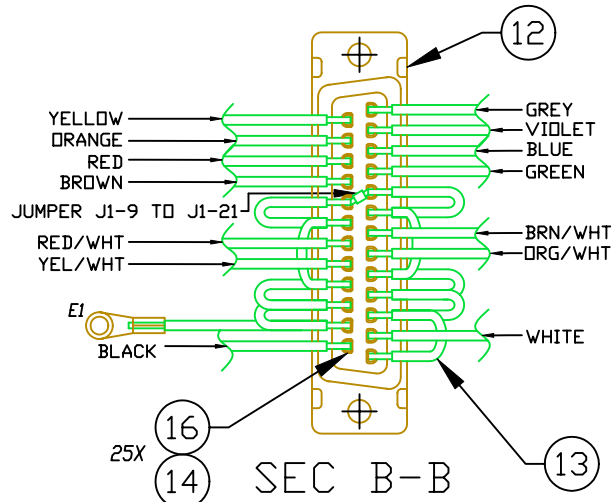


WIRE LIST					
FROM	TO	COLOR	LENGTH	SIGNAL	REMARKS
	J1-1	BLK	1.0 [25]	GND	DAISY CHAIN NOTE 4
	J1-3				
	J1-4				
	J1-5				
	J1-8				
	J1-9				
	J1-21				
	J1-20				
	J1-17				
	J1-16				
E1	J1-15	BLK	1.4 [36]	GND	DAISY CHAIN
J1-2		WHT	10.1 [257]	B+	9.88 [251]
J1-14		BLK	10.1 [257]	B-	9.88 [251]
J1-6		DRG/WHT	12.25 [311.2]	Y+	12.06 [306.3]
J1-18		YEL/WHT	16.75 [425.5]	Y-	16.56 [420.6]
J1-7		BRN/WHT	14.75 [374.7]	X-	14.56 [369.8]
J1-19		RED/WHT	5.0 [127]	X+	4.81 [122.2]
J1-10		GRN	7.7 [196]	N	7.50 [190.5]
J1-22		BRN	9.7 [246]	J	9.50 [241.3]
J1-11		BLU	7.2 [183]	P	7.00 [177.8]
J1-23		RED	9.7 [246]	K	9.50 [241.3]
J1-12		VID	6.7 [170]	Q	6.50 [165.1]
J1-24		DRG	9.0 [229]	L	18.81 [477.8]
J1-13		GRY	7.0 [178]	R	6.81 [173]
J1-25		YEL	8.2 [208]	M	8.00 [203.2]
CUT AT ^					

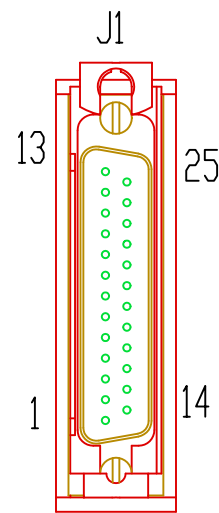

- NOTES:
- HE LEAK TEST @1 ATM. 10×10^{-9} CC/S OR LESS AFTER TEMPERATURE CYCLE.
 - HYPOT 630 VDC 500 MΩ 0.01 SEC MINIMUM W/MATING CONNECTOR.
 - TEMPERATURE CYCLE ASSEMBLY @ 150°C FOR 30 MINUTES.
 - KEEP DAISY CHAIN LOOPS TO MINIMUM LENGTH PER WIRE LIST.
 - ALL WIRE LENGTHS ARE IN INCHES ±.20.
 - COVER ALL SOLDER CUPS WITH ITEM 14.
 - KEEP ALL TWISTED PAIRS TOGETHER (3 TWISTS/INCH).
 - CUT WIRES 1.5 INCH FROM GROMMET.
 - WIRE LENGTHS SHOWN IN WIRE LIST.
 - PACKAGING REQUIRED WHICH WILL AFFORD ADEQUATE PROTECTION AGAINST PHYSICAL DAMAGE DURING HANDLING, SHIPMENT, & STORAGE.
 - DIMENSIONS ARE INCHES [millimeters].

16	A/R	SAC305	SOLDER SAC305 FAST CORE
15	A/R	SUPER D-LUBE	LUBRICANT D-RING SILICONE
14	25	RNF-100 3/32-BK	TUBING HEATSHRINK 3/32 BLK
13	11	E26 BLACK 7STRD	WIRE 26E MIL-W-16878/4 7/#34
12	1	747912-4	CONN SUBD 25P M
11	1	051221-0001	SLIDE SUBD 25P
10	6	4-40 x 3/16, SS	SCREW 4-40x3/16" PH TH SS
9	1	1726	COVER FLAT 25 PIN
8	1	1727	BLOCK FEEDTHRU BNC
7	1	2-56 x 1/8, SS	SCREW 2-56x1/8" PH SLOT SS
6	1	-023 SILICONE	D-RING -023 SILICONE 70
5	1	1597	SP6-E-200-3TP-TE26-6-24
4	15	1728	TERMINAL RING #2 TANTALUM
3	1	1725	HOUSING DEFLECTION PRELEN
2	1	1618	SP6-E-200-3TP-TE26-6-24
1	1	1598	SP6-E-200-1TP-TE26-6-24
ITEM	QTY	PART NUMBER	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-0.5
.X DECIMAL +/- 0.1 .XX DECIMAL +/- 0.02 .XXX DECIMAL +/-0.005
ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS

2751 Thunderhawk Court
Dayton, Ohio 45414-3445
U.S.A.
(937)890-1100
Fax (937)890-5165
www.pavetechnologyco.com

PAVE technology co.

DESCRIPTION
FEI-SS/D-80-25P/7TP-DB25/TE26-DB25-*

PART NUMBER
1674

REVISION LEVEL
F

PROJECTION