


PART#	PART#	DESCRIPTION
2225	5TC-TT-T-20-144	CABLE T/C TYPE T#20SLE TEF PREMIUM 144" 5PAIR
2225-1	TT20	CABLE T/C TYPE T #20 TEFLON FEP

NOTES:

1. HE LEAK TEST @1 ATM. 10×10^{-8} CC/S OR LESS.
2. HYPOT 630 VDC 500 M Ω 0.01 SEC MINIMUM, PAIR TO PAIR & HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. VOIDS SMALLER THAN $\phi .035$ [$\phi .89$] ARE ACCEPTABLE.
6. DIMENSIONS ARE INCHES[MILLIMETERS].

ITEM#	QTY	PART#	DESCRIPTION
5	10 PAIR	SEE TABLE	SEE TABLE
4	1	1014	NUT VS18 SS
3	1	-219 VITON	O-RING -219 VITON 75A
2	A/R	PAVE-Seal 150	EPOXY BLACK
1	1	0660	HOUSING VS18 SS

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-0.5
 .X DECIMAL +/- 0.1 .XX DECIMAL +/- 0.02 .XXX DECIMAL +/-0.005
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS

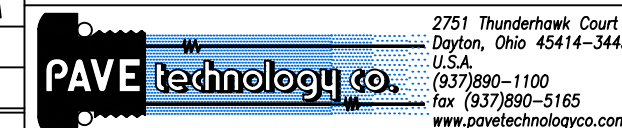

DESCRIPTION PAVE-Seal Cable Harnesses
 VS18-SS-150-10P-TT20-72-72

PART NUMBER
 2225

REVISION LEVEL
 A
 PROJECTION