


VIEW DOES NOT SHOW TWISTING

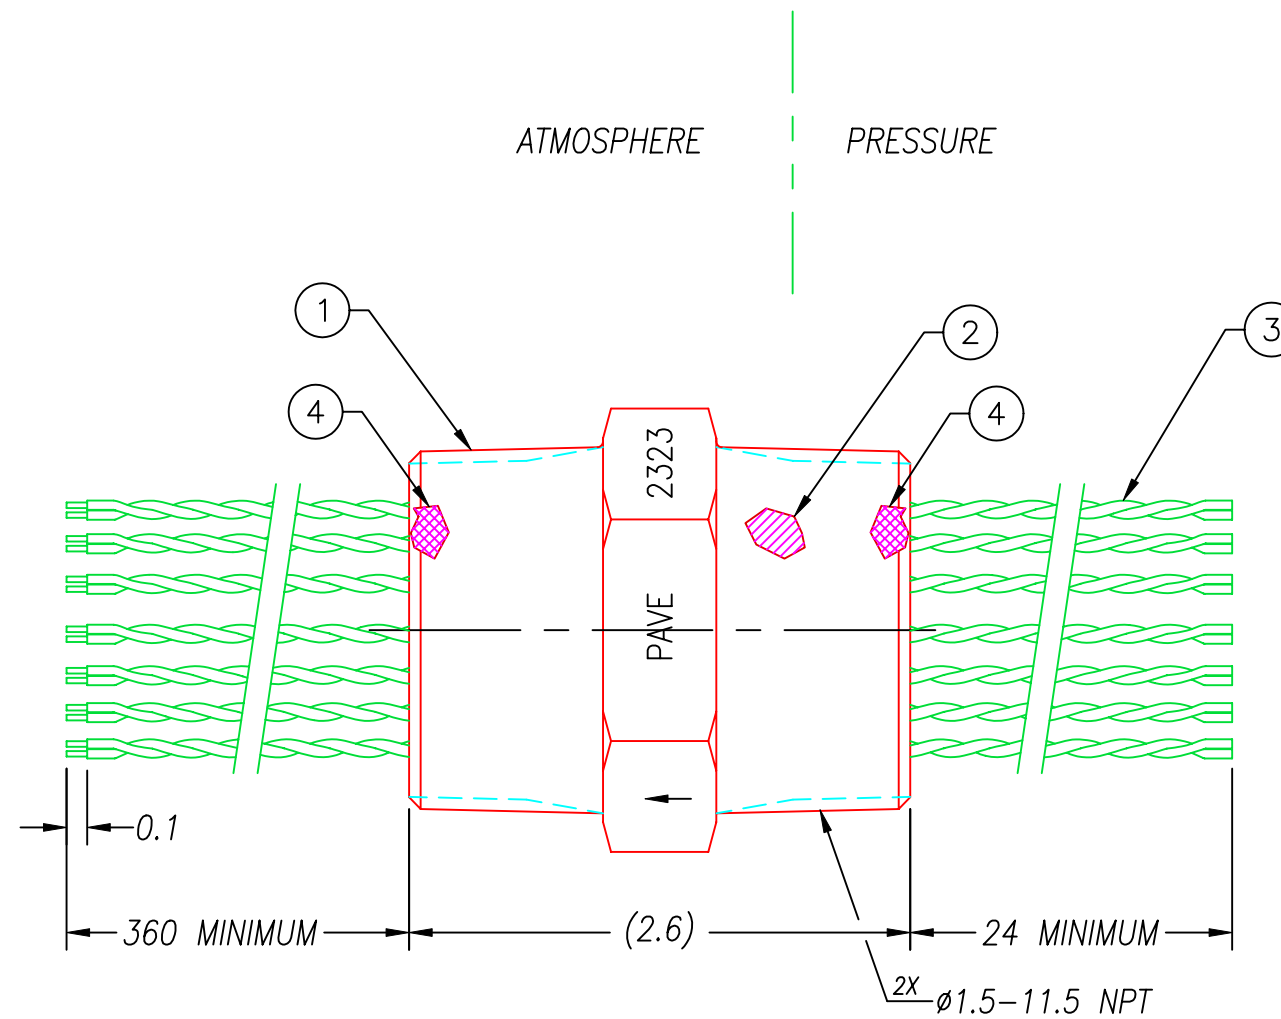

NOTES:

1. LEAK TEST: 180 PSI, NO BUBBLES 16 MINUTES MIN.
2. WET HYPOT 2600 VDC 500 MEGOHMS 0.01 SEC MINIMUM, WIRE TO WIRE & HOUSING AFTER DEGASSING ASSEMBLY UNDER WATER.
3. ALL TESTS ARE DONE AT ROOM TEMPERATURE.

4	A/R	SILICONE	SILICONE WHT
3	24P@32.5'	SXT20	WIRE 20SXT T/C TP BLACK & RED
2	A/R	PAVE-Seal 200 FR	EPOXY BLACK FLAME RETARDENT
1	1	2363	HOUSING PTN24-SS
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES  
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-0.5  
 .X DECIMAL +/- 0.1 .XX DECIMAL +/- 0.02 .XXX DECIMAL +/-0.005  
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS



DESCRIPTION PAVE-Seal® Cable Harnesses  
 PTN24-SS-200FR-24TP-SXT20-360<24

PART NUMBER  
 2323

REVISION LEVEL -  
 PROJECTION