


SP16 INSTALLATION PORT

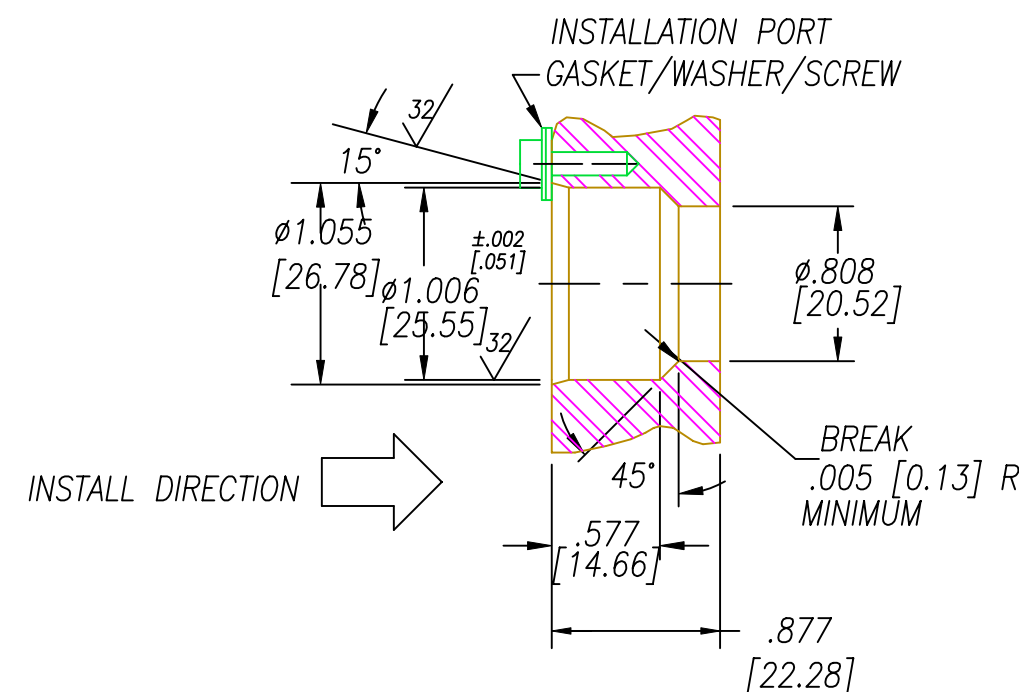

RETAINING RING GROOVE FOR USE WITH TRUARC 5100-81 OR EQUAL

NOTES:

1. LEAK TEST: 600 PSI, NO BUBBLES 2 MINUTES MINIMUM.
2. HYPOT 630 VDC 500 MΩ 0.01 SEC MINIMUM, WIRE TO WIRE.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. WIRE COLOR POSITIONS MAY VARY.
6. O-RING GROOVE MAY HAVE 0.1 [3] THK X 0.01 [.3] HIGH FLASH AT PARTING LINE.
7. VOIDS LARGER THAN $\phi.035 [.89]$ ARE NOT ACCEPTABLE.
8. DIMENSIONS ARE INCHES [millimeters].
9. PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.

19	2	E26 YEL/WHT	WIRE 26E STRIPE 7/#34
18	2	E26 YELLOW	WIRE 26E MIL-W-16878 7/#34
19	2	E26 WHT/RED STR	WIRE 26E MIL-W-16878/4 7/#34
18	2	E26 WHT/BRN STR	WIRE 26E MIL-W-16878/4 7/#34
17	2	E26 WHT/BLK STR	WIRE 26E MIL-W-16878/4 7/#34
16	2	E26 WHITE	WIRE 26E MIL-W-16878/4 7/#34
15	3	E26 RED/WHT STR	WIRE 26E STRIPE 7/#34
14	2	E26 RED	WIRE 26E MIL-W-16878/4 7/#34
13	2	E26 PURPLE	WIRE 26E 7/#34
12	2	E26 ORG/WHT	WIRE 26E STRIPE 7/#34
11	3	E26 ORANGE	WIRE 26E MIL-W-16878/4 7/#34
10	2	E26 GREEN	WIRE 26E 7/#34
9	2	E26 GRAY	WIRE 26E 7/#34
8	2	E26 BROWN 7 STR	WIRE 26E MIL-W-16878/4 7/#34
7	2	E26 BRN/WHT STR	WIRE 26E STRIPE 7/#34
6	3	E26 BLUE	WIRE 26E MIL-W-16878/4 7/#34
5	3	E26 BLACK 7STRD	WIRE 26E MIL-W-16878/4 7/#34
4	A/R	PAVE-Seal 150	EPOXY BLACK
3	A/R	PARKER O-LUBE	LUBRICANT O-RING BARIUM-BASED
2	2	-O20 VITON	O-RING -O20 VITON 75
1	1	ALL DIMENSIONS AND TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/- 0.5	
ITEM	QTY	DESCRIPTION	DESCRIPTION

PAVE technology co.
 2751 Thunderhawk Court
 Dayton, Ohio 45414-3445
 U.S.A.
 (937)890-1100
 fax (937)890-5165
 www.pavetechnologyco.com

DESCRIPTION PAVE-Seal® Cable Harnesses
 SP16-E-150-38-TE26-36-36

PART NUMBER

2467

REVISION LEVEL

A

PROJECTION

