


NOTES:

1. LEAK TEST: 80 PSI, NO BUBBLES 30 SECONDS MINIMUM.
2. HYPOT 630 VDC 500 MΩ 0.01 SEC MINIMUM, ROD TO HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. REF-OPERATING TEMPERATURE RANGE -20°C TO 125°C.
6. NO VOIDS LARGER THAN ø.035 [.89] ARE ACCEPTABLE.
7. DIMENSIONS ARE INCHES [millimeters].

5	A/R	SUPER O-LUBE	LUBRICANT O-RING SILICONE-BASED
4	1	-905 BUNA	O-RING -905 BUNA 75
3	A/R	PAVE-Seal 150	EPOXY BLACK
2	1	TRBB-632-36	ROD BRASS THREADED 6-32 36"L
1	1	2074	HOUSING S08-SS
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES  
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-0.5  
 .X DECIMAL +/- 0.1 .XX DECIMAL +/- 0.02 .XXX DECIMAL +/-0.005  
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS

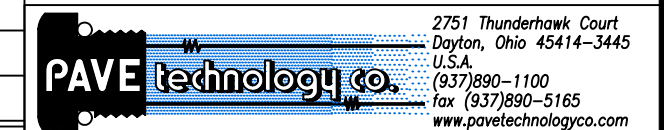

DESCRIPTION PAVE-Mate@I Connectors  
 S08-SS-150-1-BR-1-1

PART NUMBER  
 2584

REVISION LEVEL C  
 PROJECTION